

Location: _____




FS1530-FL-TB

8" X 4" X 4" FLOOR AREA AND INDIRECT SANITARY WASTE DRAIN WITH FLANGE

Specification: MIFAB® Series Series FS1530-FL-TB, 8" x 4" x 4" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior and loose set grate and anchor flange with weepholes. Anti-splash

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a small volume sanitary drain. The anchor flange is engineered to receive water proofing membrane. Membrane clamps are recommended for use with the anchor flange (Suffix -C). Regular top is recommended for installation under counters and along walls. The light duty grate is not suitable for foot traffic. The floor sink body is made with a 4" NPSM threaded connection so that any one of MIFAB's A1 bodies can be threaded onto the underside of the body with a water sealing gasket between the underside of the floor sink and the A1 body.

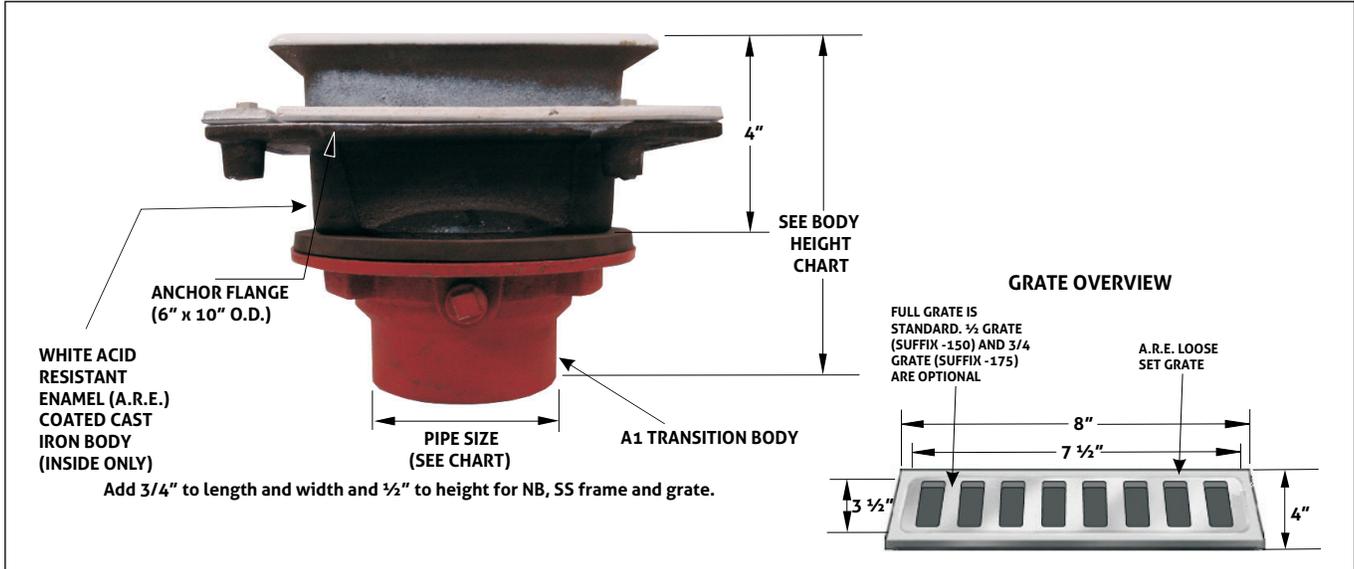

*Indicates outlet size and connection available with transition outlet body only.
 Outlet sizes indicated by the * are available with the transition outlet body only.

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30) / ABS (-31)
2" (51)	*6 1/2" (165)	*7 1/4" (184)	*8" (203)	*6 1/2" (165)	*7 1/4" (184)
3" (76)	*6 1/2" (165)	*7 1/4" (184)	*8" (203)	*6 7/8" (175)	*7 1/4" (184)
4" (102)	*6 1/2" (165)	*7 1/4" (184)	*8" (203)	*6 7/8" (175)	*7 1/4" (184)

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze frame and grate
- 3 Stainless steel frame and grate
- 5 Sediment bucket
- 6 Security screws (1, -3 only, H-1039A, 4 pcs.)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3" or 4")
- 21 Secondary flat stainless steel strainer
- 22 Less grate
- 30 PVC outlet
- 31 ABS outlet
- 32 Deep seal trap with flushing connection
- 50 A.R.E. coated cast iron funnel
- 51 2 1/2" round center hole in grate (-1, -3 only)
- 69 Stainless steel sediment bucket
- 83 Stainless steel mesh screen over sediment bucket
- 90 Threaded side outlet

SUFFIX OPTIONAL VARIATIONS

- 90NH No hub side outlet
- 95 Client logo (-1, -3 only)
- 150 1/2 grate
- 175 3/4 grate
- BA Buy American Act compliant product
- (Standard) No hub outlet
- C Membrane clamp with hardware
- F4 4" round funnel
- F6 6" round funnel
- G 4" x 9" oval funnel
- J 3" x 1" oval funnel
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet
- X Inside caulk outlet
- Z Extended wide elastomeric flange (with -FL only)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____