

Location: \_\_\_\_\_



**MPFR-DW**

**INSULATED FIRE RATED ACCESS DOOR  
W/ DRYWALL BEAD FRAME**

**Specification:** MIFAB® Series MPFR-DW fire rated access door is approved by Underwriters Laboratories Inc., for 1 ½ hours, "B" label in walls and is approved by Warnock Hersey for 2 hours in ceilings and 3 hours in walls. It meets ANSI-UL 10B standards. The same door can be used in walls and ceilings. Tests were conducted using mild steel and type 304 stainless steel. The MPFR-DW incorporates a drywall bead type of frame for a concealed frame application.

**Material:** MPFR-DW Series is 16 gage satin coat steel front door with 20 gage backliner and 16 gage satin coat steel frame. The MPFR-DWSS Stainless Steel Series is 16 gage #304 stainless steel front door with 20 gage backliner and 16 gage #304 stainless steel frame.

**Finish:** Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

**Door:** Flush to frame. Self-closing. Can be opened from the inside or back of the door with MIFAB's unique thumb-turn latch.

**Frame:** Four piece welded frame with masonry mounting straps and drywall bead frame for concealed drywall applications.

**Hinge:** Concealed pivot pins.

**Spring:** Heavy duty. An extra spring is provided with every door greater than 14" x 14" (356 x 356) for ceiling installation. Both springs must be attached to the door to ensure that the door will close when installed in the ceiling.

**Latch:** Standard - Flush mounted, interchangeable turn-ring operator and key-operator latch. Optional - cylinder key lock. All of MIFAB's cylinder key locks are keyed alike.

**Fire Rating:** Underwriters Laboratories "B" label. 1 ½ hours for walls. Warnock Hersey: 1 hour combustible ceilings and walls, 2 hour non-combustible ceilings and 3 hour noncombustible walls. Ceiling fire ratings are up to and including the 24" x 36" (610 x 914) size.

**Insulation:** Roxul Rockboard 80. 2" (50) thick and fire retardant.


**Packaging:** Individual pack.



California State Fire Marshall  
Approval # 3330-1535:00





**Key Operator**



**Turn Ring Operator**

The Key Operator and Turn Ring Operator keys are shipped with every MFRU fire rated access door. If additional keys are required, please order them by Part # KEY-TRO

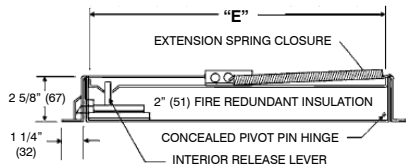

"B" x "A"	WALL OPENING	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
8" x 8"	8 1/2" x 8 1/2"	10.0	1	MPFR-DW0808	MPFR-DWSS0808
10" x 10"	10 1/2" x 10 1/2"	12.0	1	MPFR-DW1010	MPFR-DWSS1010
12" x 12"	12 1/2" x 12 1/2"	14.0	1	MPFR-DW1212	MPFR-DWSS1212
12" x 18"	12 1/2" x 18 1/2"	16.0	1	MPFR-DW1218	MPFR-DWSS1218
12" x 24"	12 1/2" x 24 1/2"	19.0	1	MPFR-DW1224	MPFR-DWSS1224
14" x 14"	14 1/2" x 14 1/2"	15.5	1	MPFR-DW1414	MPFR-DWSS1414
16" x 16"	16 1/2" x 16 1/2"	16.5	1	MPFR-DW1616	MPFR-DWSS1616
18" x 18"	18 1/2" x 18 1/2"	19.0	1	MPFR-DW1818	MPFR-DWSS1818
20" x 20"	20 1/2" x 20 1/2"	24.0	1	MPFR-DW2020	MPFR-DWSS2020
22" x 22"	22 1/2" x 22 1/2"	28.0	1	MPFR-DW2222	MPFR-DWSS2222
22" x 30"	22 1/2" x 30 1/2"	35.0	2	MPFR-DW2230	MPFR-DWSS2230
24" x 24"	24 1/2" x 24 1/2"	30.0	1	MPFR-DW2424	MPFR-DWSS2424
24" x 36"	24 1/2" x 36 1/2"	46.0	2	MPFR-DW2436	MPFR-DWSS2436
24" x 48"	24 1/2" x 48 1/2"	65.0	2	MPFR-DW2448	MPFR-DWSS2448
30" x 30"	30 1/2" x 30 1/2"	45.0	1	MPFR-DW3030	MPFR-DWSS3030
32" x 32"	32 1/2" x 32 1/2"	47.0	1	MPFR-DW3232	MPFR-DWSS3232
36" x 36"	36 1/2" x 36 1/2"	60.0	2	MPFR-DW3636	MPFR-DWSS3636
36" x 48"	36 1/2" x 48 1/2"	80.0	2	MPFR-DW3648	MPFR-DWSS3648

SUFFIX	OPTIONAL VARIATIONS
-C	Cylinder key lock



(Dimension) Denotes Millimetres

**NOTE:** The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

MIFAB® reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880