

BIG-750

- 1. Inlet and Outlet No-Hub Connections.
- 2. Liquid Holding Capacity: 140 Gallons
- 3. H2O Load Rated Access Covers
- 4. Maximum Operating Temperature: 190° Continuous

DETAILS




- Certified by CSA and IAPMO to ASME A112.14.3, CSA B481
- Approved installation to ASME A112.14.3 Type C
- Factory installed internal piping.
- 3/8" thick seamless high density polyethylene.
- Full internal access through lids.
- Vent not required for proper operation.
- Designed for above or below ground installations.
- Integral Anti-siphon Air Relief port.

SUFFIX





- AK
- C
- DP
- EP
- F6
- HLA

OPTIONAL VARIATIONS

- High water anchor kit
- Lid extension(specify)
- Dosing pump
- Enzyme port
- 6" No Hub inlet/outlet connection
- High level alarm

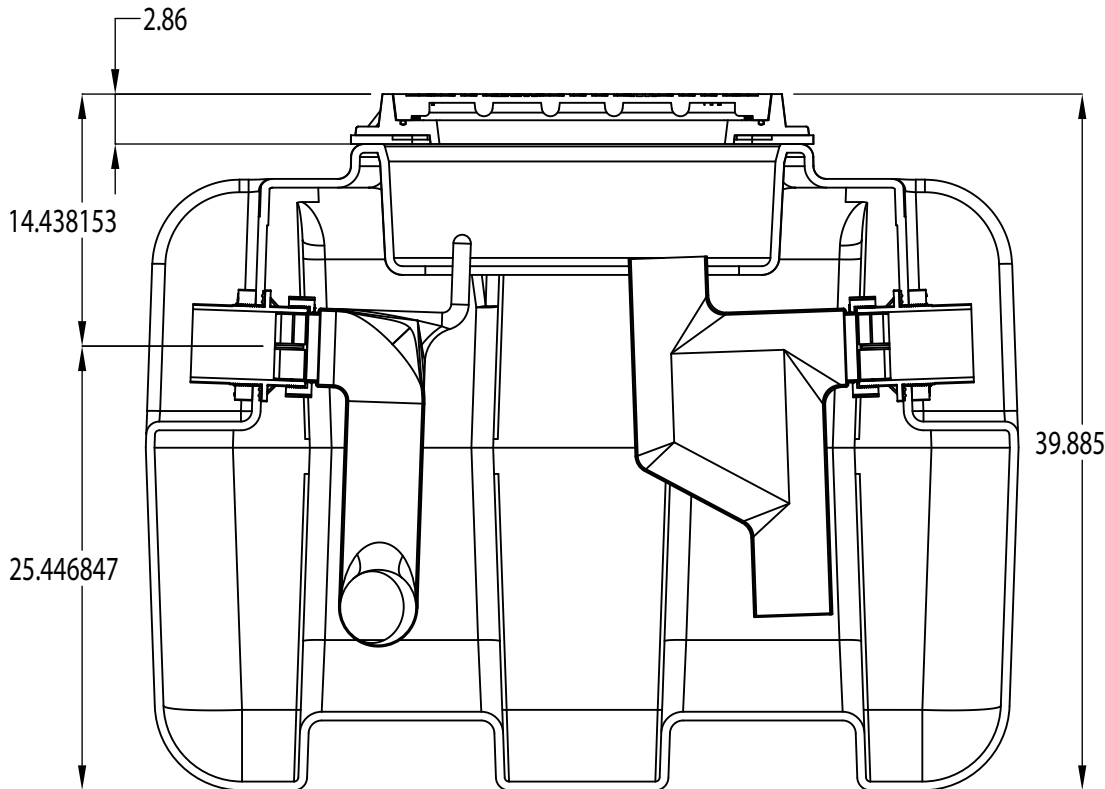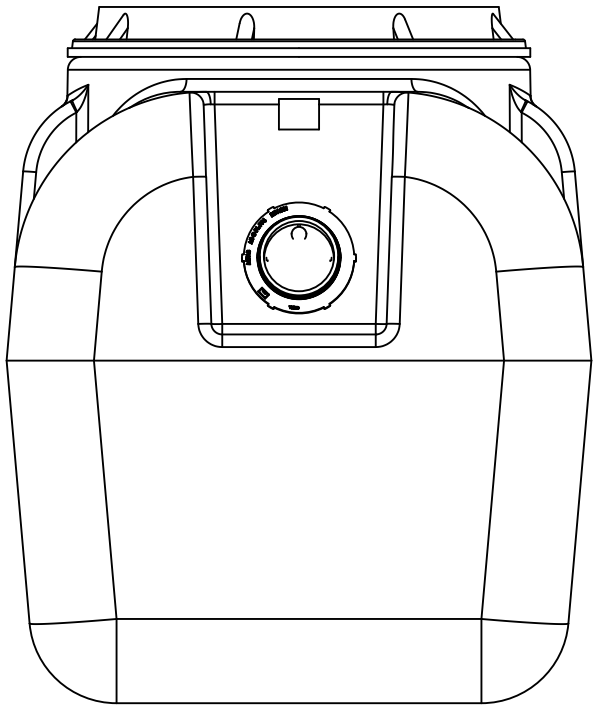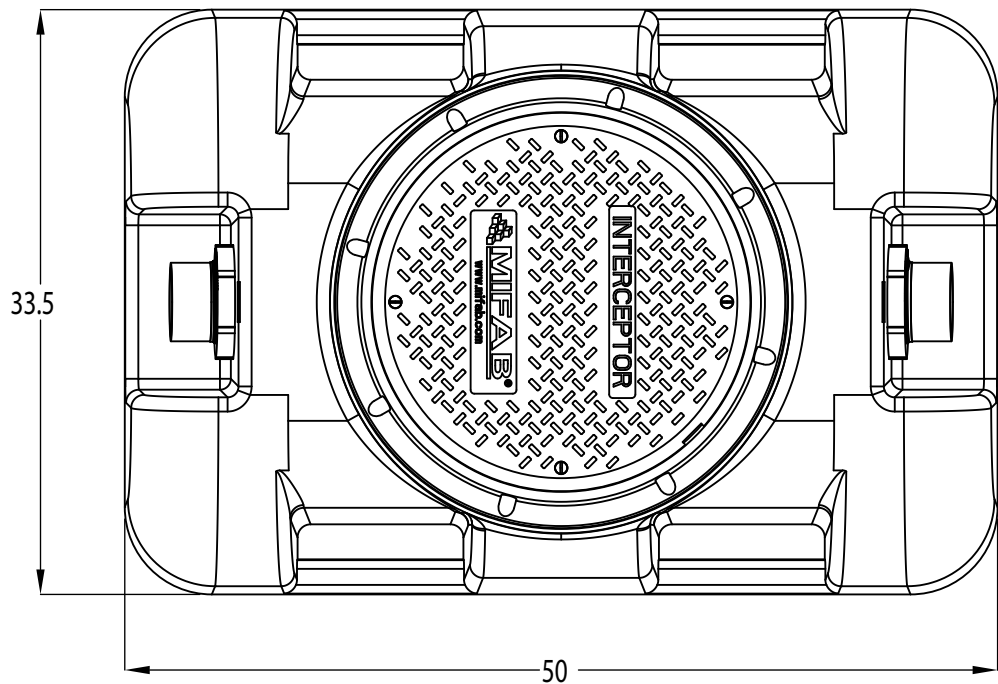

SHOWN WITH DIRECT CONNECT LID OPTION (-DCL)

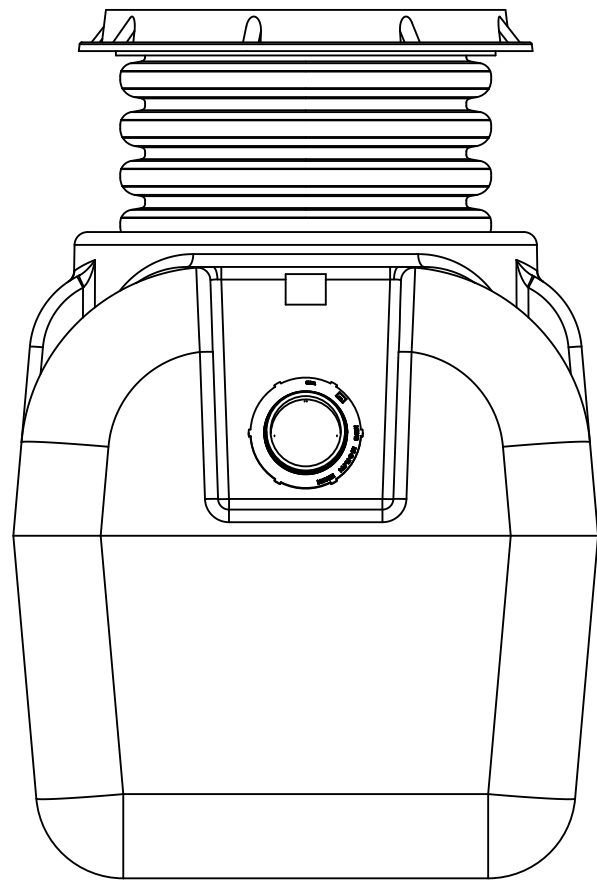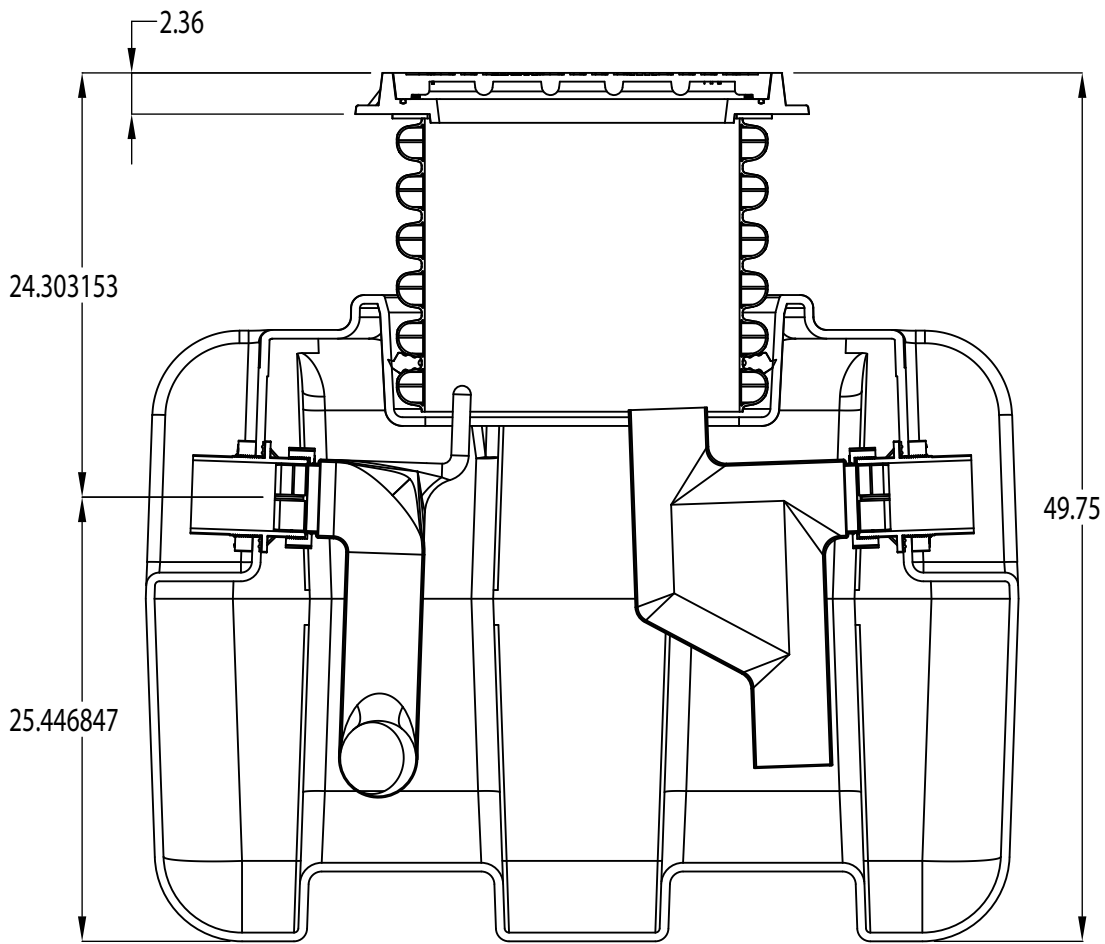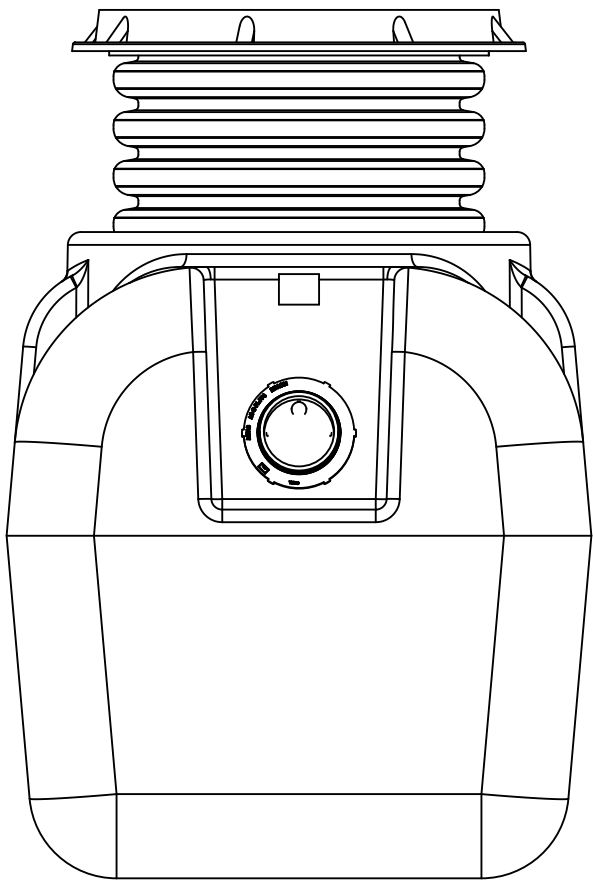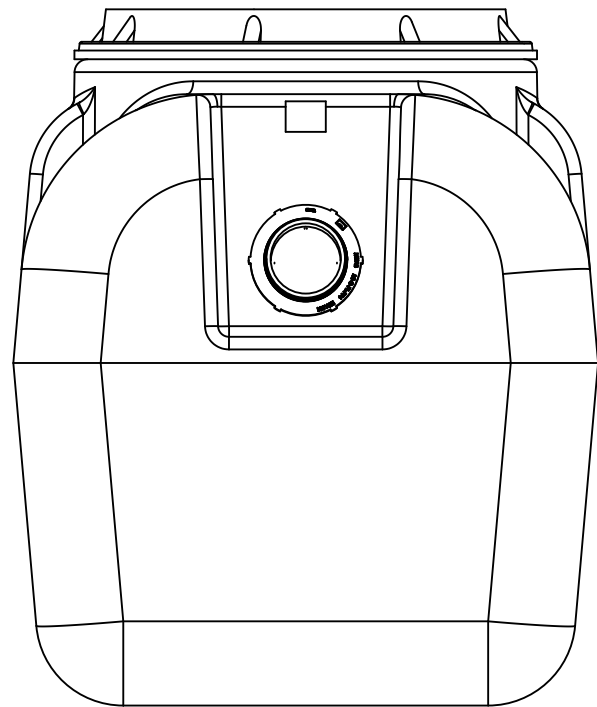

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MIFAB, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MIFAB, INC. IS
PROHIBITED.

LASER/SHEAR:		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
BRAKE PRESS:		DIMENSIONS ARE IN INCHES		XX	XX
WELDED BY:		TOLERANCES:	DRAWN	CHECKED	XX
CLEAN/PAINT:		FRACTIONAL ± 1/16		ENG APPR.	
COMPLETED BY:		ANGULAR: MACH ± 1° BEND ± 1°		MFG APPR.	
REVIEWED BY:		TWO PLACE DECIMAL ± .015		Q.A.	
NEXT ASSY	USED ON	THREE PLACE DECIMAL ± .010		QUANTITY:	
APPLICATION		TYPICAL DRAFT ANGLE 2°		SEE-BOM	
		MATERIAL DESCRIPTION			
		SEE-BOM			
		FINISH PART			
		XX			
		DO NOT SCALE DRAWING			

TITLE:		75GPM HDPE GREASE INTERCEPTOR	
SIZE	DWG. NO.	REV	
C	BIG-750		
SCALE: 1:11	WEIGHT:	SHEET 1 OF 1	

