



STR-PC

Ductile Iron
Flanged by Flanged

Function:

BEECO Style Ductile Iron Class 125 Flanged Strainers in sizes 2" thru 10" are designed to protect your mechanical systems from damage caused by dirt, debris, rust and other solid contaminants. This series features as a standard offering a tapped closure plug for easy of drainage.

Ratings:



Working Pressure PN16/Class 125
Temperatures to 270° F (120°C)

Materials:

Body: Ductile Iron A536 65-45 12
Cover: Ductile Iron A536 65-45 12
Gasket: Teflon/Graphite
Standard Screen: 304 Stainless Steel
Hole Size 1/16" up to 3" strainer and 1/8" on 4" and over.



Flow/Pressure Drop Chart

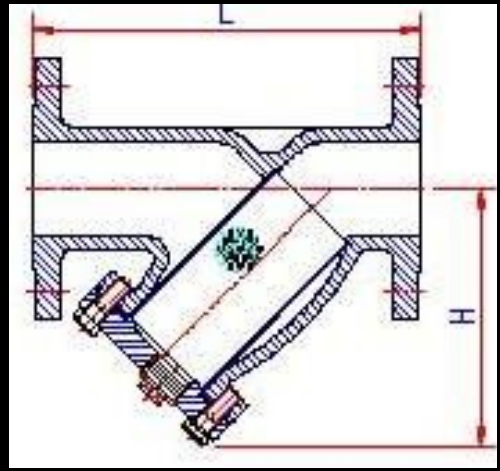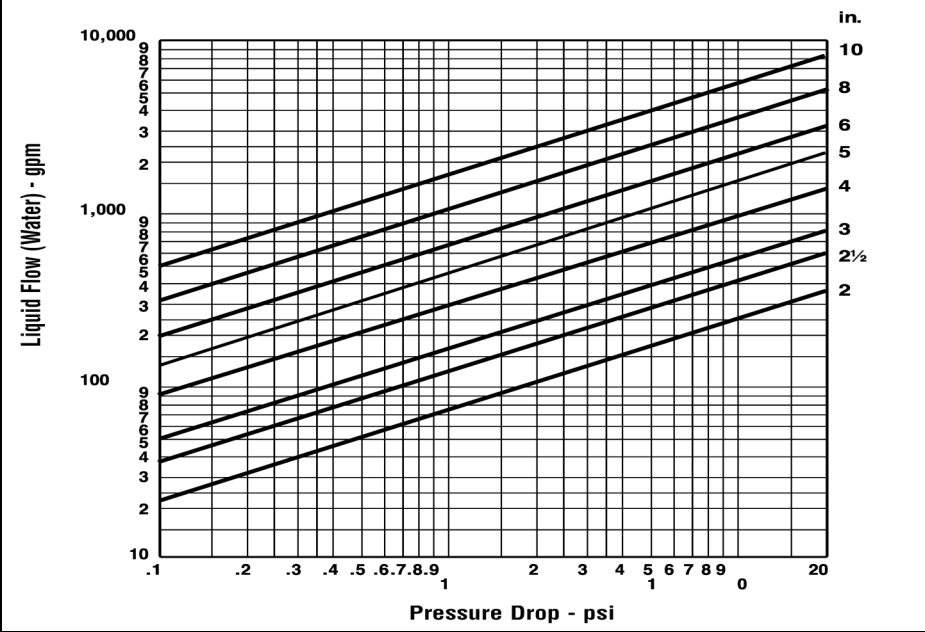

SIZE	2"	2 1/2"	3"	4"	6"	8"	10"
L	9 1/16"	11 5/8"	11 5/8"	13 7/8"	18 1/2"	21 3/8"	26"
H	5 3/4"	6 7/8"	7 3/4"	9 1/8"	12"	15 3/4"	18 5/8"
Plug	1/2"	1"	1"	1"	1 1/2"	1 1/2"	2"

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

Please consult BEECO engineering to get the latest updates On materials and specifications.

www.beecobackflow.com 1321 West 119th Street, Chicago IL, 60643
 BEECO Canada 150 Norfich Drive Unit 4, Toronto, Ontario, Canada
 M3N 1X6. Tel (416) 679-0380 Toll Free 1-800-387-3880