


**Specification:** MIFAB® C1100-C Series (specify top assembly design) adjustable floor cleanout with lacquered cast iron body and anchor flange, cast iron membrane clamp for waterproofing membrane, secondary "O" ring Test Seal, 4" diameter cleanout opening and round scoriated combined cover and plug top assembly (specify material type) with stainless steel vandal proof allen key screws and primary gasket seal.

**Function:** Used in finished floors that have a continuous waterproof membrane to provide emergency access to the plumbing lines for removal of blockages. Membrane clamp is bolted onto the anchor flange integral in all MIFAB C1000 / C1100 Series cleanouts, securing the waterproof membrane in place. Seepage control is not available since cleanouts must be gas tight. Replacement of the surface level cover / plug with the neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed to prevent harmful sewer gases from entering the building.

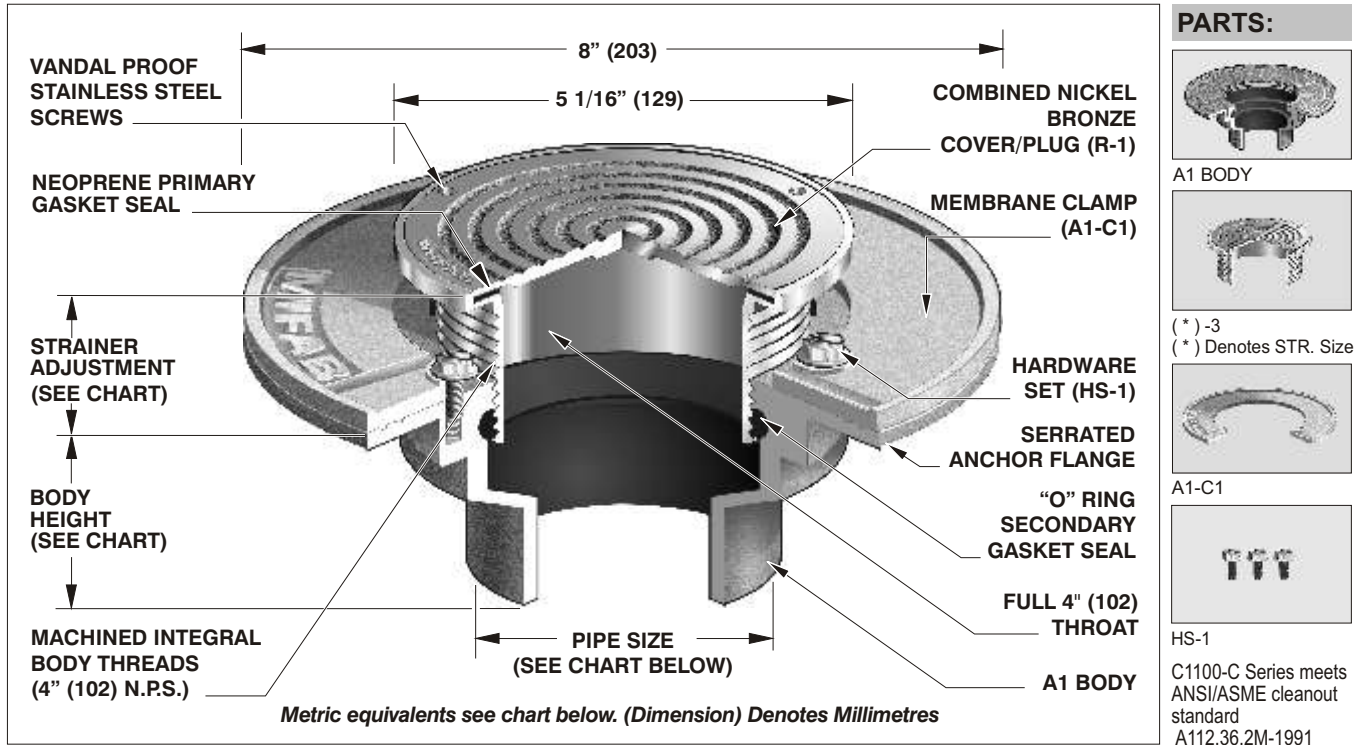

TOP ASSEMBLY SIZE	TOP ASSEMBLY ADJUSTMENT		ANSI/ASME LOAD RATING			PIPE SIZE	BODY HEIGHT				
	MIN	MAX	N.B. (-1)	S.S. (-3)	D.I. (-4)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30) / (-31)
5" (127)	1/2" (13)	1 1/4" (32)	UP TO 4,999 LBS.	5,000 TO 7,499 LBS.	Special Duty, Over 10,000 LBS.	2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
						3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
						4" (102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
						5" (127)	2 3/4" (70)	-	2 5/8" (67)	3 3/4" (95)	-
						6" (152)	3 1/4" (83)	4 3/4" (121)	-	-	-

- |  |               |   |               |
|--|---------------|---|---------------|
| <b>OPTIONAL VARIATIONS:</b>  | <b>SUFFIX</b> | <b>SUFFIX</b>   | <b>SUFFIX</b> |
| <input type="checkbox"/> Nickel bronze top assembly (standard)                           | -1            | <input type="checkbox"/> PVC socket connection body                                       | -30           |
| <input type="checkbox"/> Heavy duty stainless steel top assembly                         | -3            | <input type="checkbox"/> ABS socket connection body                                       | -31           |
| <input type="checkbox"/> Extra heavy duty ductile iron top assembly for unfinished areas | -4            | <input type="checkbox"/> Secondary closure plug   | -34           |
| <input type="checkbox"/> Security screws (T-20 torx and pin)                             | -6            | <input type="checkbox"/> Threaded side outlet (2",3",4")                                  | -90           |
| <input type="checkbox"/> Acid resistant epoxy coating                                    | -11           | <input type="checkbox"/> No hub side outlet (2",3",4")                                    | -90NH         |
| <input type="checkbox"/> All galvanized  | -13           | <input type="checkbox"/> Client logo  | -95           |
| <input type="checkbox"/> Extension   | -15           | <input type="checkbox"/> No hub outlet (Standard)   | (Standard)    |
| <input type="checkbox"/> Bronze body   | -27           | <input type="checkbox"/> Push on outlet   | P             |
| <input type="checkbox"/> Stainless steel body (Type 304)                                 | -28           | <input type="checkbox"/> Round top assembly   | -R            |
| <input type="checkbox"/> Stainless steel body (type 316)                                 | -29           | <input type="checkbox"/> Stainless steel carpet marker                                    | -RC           |
|  |               | <input type="checkbox"/> Stainless steel carpet flange cover (-1 or -3 only)              | -RCF          |
|  |               | <input type="checkbox"/> Square top assembly (-1 or -3 only)                              | -S            |
|  |               | <input type="checkbox"/> Round top assembly recessed 1/8" for tile (-1 or -3 only)        | -T            |
|  |               | <input type="checkbox"/> Threaded outlet  | T             |
|  |               | <input type="checkbox"/> Square top assembly recessed 1/8" for tile (-1 or -3 only)       | -TS           |
|  |               | <input type="checkbox"/> Round top assembly recessed 1 1/4" for terrazzo (-1 or -3 only)  | -UR           |
|  |               | <input type="checkbox"/> Square top assembly recessed 1 1/4" for terrazzo (-1 or -3 only) | -US           |
|  |               | <input type="checkbox"/> Inside caulk outlet  | X             |
|  |               | <input type="checkbox"/> Heavy duty nickel bronze top assembly                            | -XR-1         |
|  |               | <input type="checkbox"/> Extended wide elastomeric flange                                 | -Z            |

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____