MIFAB® C1100

FLOOR CLEANOUT WITH ADJUSTABLE COVER AND PLUG

Specification: MIFAB® C1100 Series (specify top assembly design) adjustable floor cleanout with lacquered cast iron body and anchor flange, secondary "O" ring Test Seal, 4" diameter cleanout opening and scoriated combined cover and plug top assembly (specify material type) with stainless steel vandal proof allen key screws and primary gasket seal. (For membrane floors, add Suffix -C for the membrane clamp).

Function: Used in finished floors to provide emergency access to the plumbing lines for removal of blockages. Replacement of the surface level cover / plug with the neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed to prevent harmful sewer gases from entering the building.

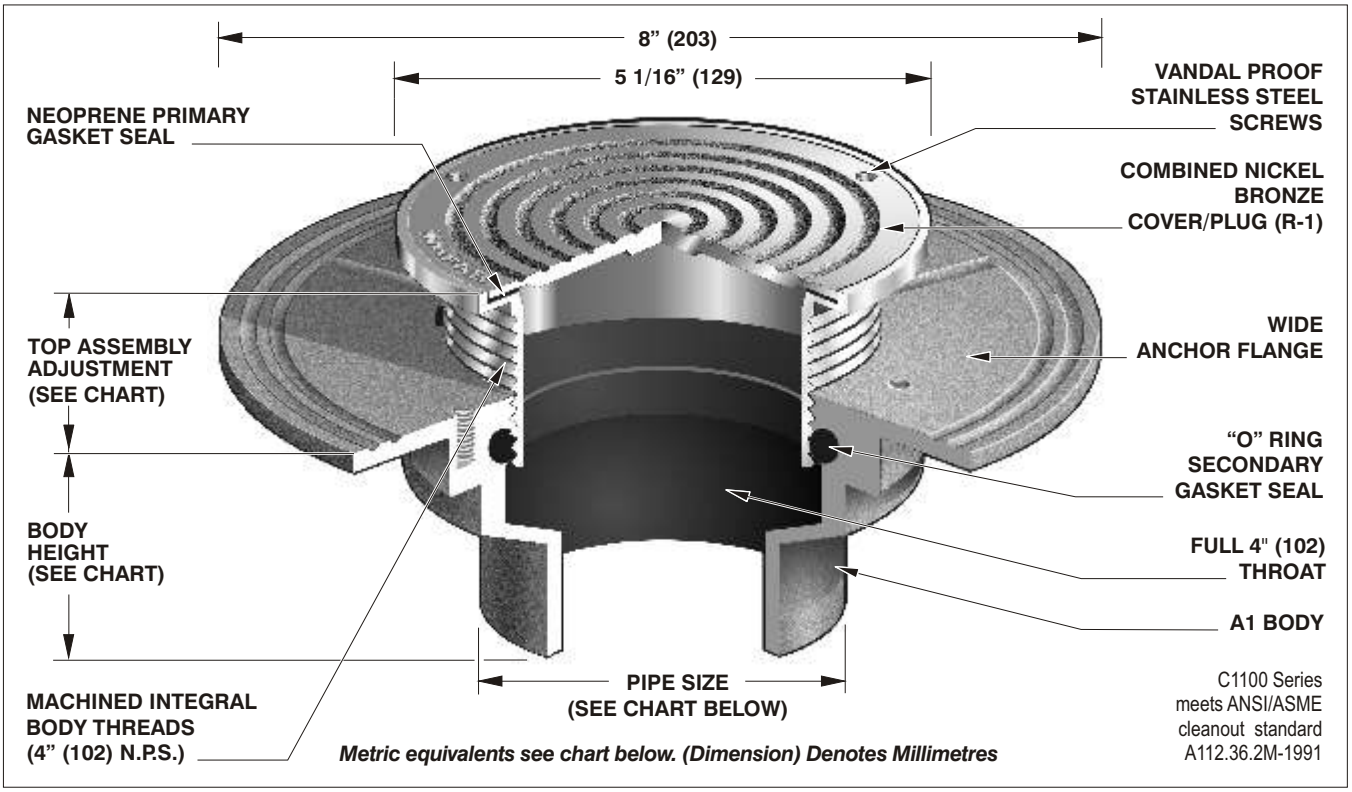

Metric equivalents see chart below. (Dimension) Denotes Millimetres

C1100 Series meets ANSI/ASME cleanout standard A112.36.2M-1991

TOP ASSEMBLY SIZE	TOP ASSEMBLY ADJUSTMENT		ANSI/ASME LOAD RATING			PIPE SIZE	BODY HEIGHT				
	MIN	MAX	N.B. (-1)	S.S.(-3)	D.I.(-4)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30) / (-31)
5" (127)	1/2" (13)	1 1/4" (32)	UP TO 4,999 LBS.	5,000 TO 7,499 LBS.	Special Duty, over 10,000 LBS.	2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
						3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
						4" (102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
						5" (127)	2 3/4" (70)	-	2 5/8" (67)	3 3/4" (95)	-
						6" (152)	3 1/4" (83)	4 3/4" (121)	-	-	-

OPTIONAL VARIATIONS: **SUFFIX**

- ☐ Nickel bronze top assembly (standard) -1
- ☐ Heavy duty stainless steel top assembly -3
- ☐ Extra heavy duty ductile iron top assembly for unfinished areas -4
- ☐ Security screws (T-20 torx and pin) -6
- ☐ Acid resistant epoxy coating -11
- ☐ All galvanized -13
- ☐ Extension -15
- ☐ Bronze body -27
- ☐ Stainless steel body (Type 304) -28
- ☐ Stainless steel body (Type 316) -29

SUFFIX

- ☐ PVC socket connection body -30
- ☐ ABS socket connection body -31
- ☐ Secondary closure plug -34
- ☐ Threaded side outlet (2",3",4") -90
- ☐ No hub side outlet (2",3",4") -90NH
- ☐ Client logo -95
- ☐ No hub outlet (Standard)
- ☐ Membrane clamp -C
- ☐ Push on outlet P
- ☐ Round top assembly -R
- ☐ Stainless steel carpet marker -RC
- ☐ Stainless steel carpet flange cover (-1 or -3 only) -RCF
- ☐ Square top assembly (-1 or -3 only) -S

SUFFIX

- ☐ Square top assembly -S
- ☐ Round top assembly recessed 1/8" for tile (-1 or -3 only) -T
- ☐ Threaded outlet T
- ☐ Square top assembly recessed 1/8" for tile (-1 or -3 only) -TS
- ☐ Round top assembly recessed 1 1/4" for terrazzo (-1 or -3 only) -UR
- ☐ Square top assembly recessed 1 1/4" for terrazzo (-1 or -3 only) -US
- ☐ Inside caulk outlet X
- ☐ Heavy duty nickel bronze top assembly -XR-1
- ☐ Extended wide elastomeric flange -Z

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB *reserves the right to make changes in material and design without formal notice and obligation.*