




# F1000

## FLOOR DRAIN WITH HEAVY DUTY STAINLESS STEEL STRAINER

**Specification:** MIFAB® Series F1000-( \* )-3 ( \* specify strainer diameter) lacquered cast iron floor drain with anchor flange, weepholes, and standard heavy duty, polished stainless steel strainer. (For membrane floors, add -C to Series number).

**Function:** Used in showers, kitchens, restrooms, and other non-membrane finished areas. Round adjustable stainless steel strainer is used for all types of poured finished floors. Strainer will not dish or corrode and is foot friendly.

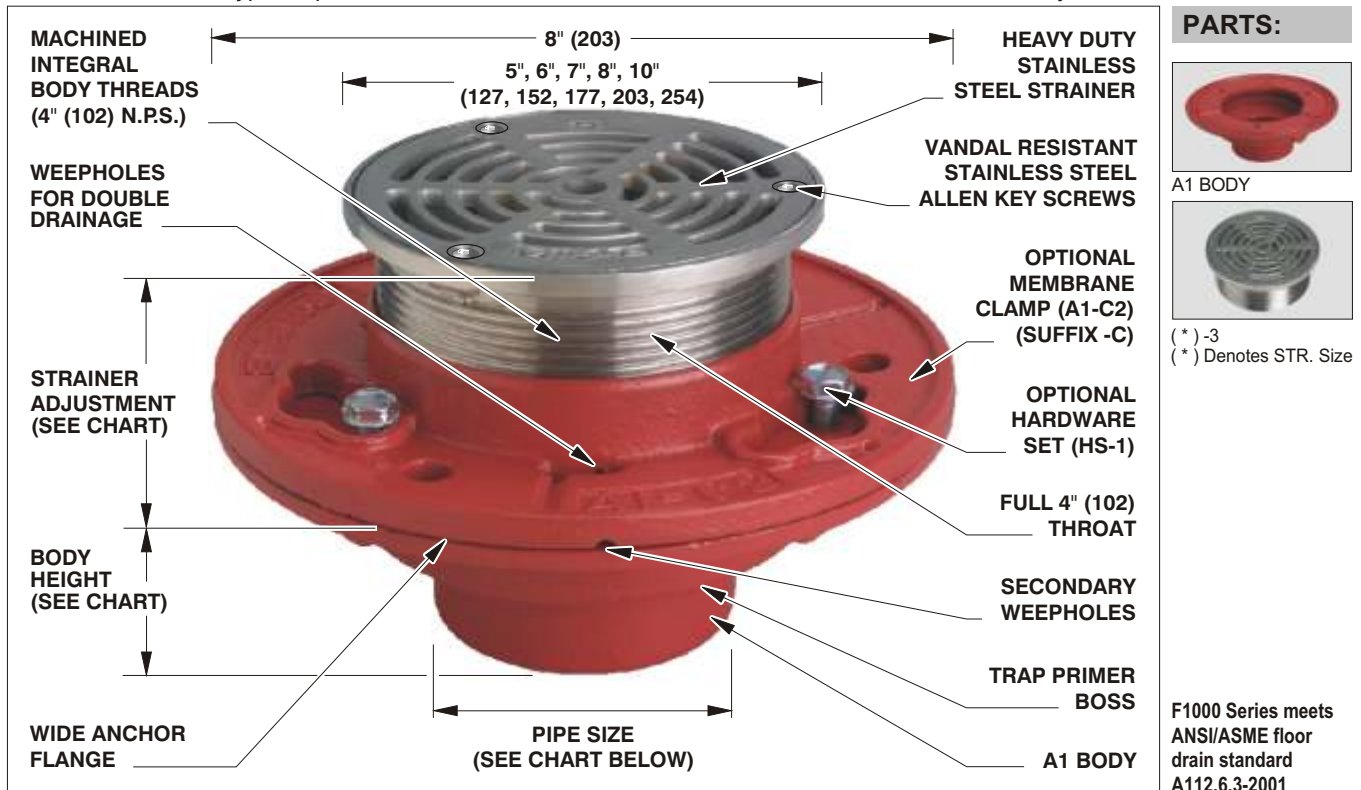

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING LBS. S.S. (-3)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
5" (127)	1/2" (13)	1 1/2" (38)	8 in <sup>2</sup> (5200 <sup>2</sup> )	5000 to 7499	2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
6" (152)	11/16" (17)	1 1/2" (38)	9 in <sup>2</sup> (5800 <sup>2</sup> )	5000 to 7499	3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
7" (177)	9/16" (14)	1 9/16" (40)	12 in <sup>2</sup> (7700 <sup>2</sup> )	5000 to 7499	4" (102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
8" (203)	11/16" (17)	2 1/4" (57)	18 in <sup>2</sup> (11600 <sup>2</sup> )	5000 to 7499	5" (127)	2 3/4" (70)	—	2 5/8" (67)	3 3/4" (95)	—
10" (254)	11/16" (17)	2 1/4" (57)	26 in <sup>2</sup> (17170 <sup>2</sup> )	5000 to 7499	6" (152)	3 1/4" (83)	4 3/4" (121)	—	—	—

OPTIONAL VARIATIONS:	SUFFIX	SUFFIX	SUFFIX	SUFFIX	
<input type="checkbox"/> Stainless steel strainer (standard)	-3	<input type="checkbox"/> Stainless steel body (type 304)	-28	<input type="checkbox"/> Membrane clamp for low rough-in (min. 1/2" (13))	-C1
<input type="checkbox"/> 3M epoxy finish	-3M	<input type="checkbox"/> Stainless steel body (type 316)	-29	<input type="checkbox"/> 4" Round funnel	-F4
<input type="checkbox"/> Sediment bucket	-5	<input type="checkbox"/> PVC socket connection body	-30	<input type="checkbox"/> 6" Round funnel	-F6
<input type="checkbox"/> Security screws (T-20 torx & pin)	-6	<input type="checkbox"/> ABS socket connection body	-31	<input type="checkbox"/> Oval 4" x 9" funnel	-G
<input type="checkbox"/> Trap seal primer tapping	-7	<input type="checkbox"/> Closure plug	-34	<input type="checkbox"/> 6" x 3" x 1" funnel	-J
<input type="checkbox"/> Backwater valve	-8	<input type="checkbox"/> Underdeck clamp	-40	<input type="checkbox"/> No hub outlet	(Standard)
<input type="checkbox"/> Acid resistant epoxy coating	-11	<input type="checkbox"/> Sump receiver	-41	<input type="checkbox"/> Push on outlet	P
<input type="checkbox"/> All galvanized	-13	<input type="checkbox"/> Threaded side outlet	-90	<input type="checkbox"/> Threaded outlet	T
<input type="checkbox"/> Extension	-15	<input type="checkbox"/> Client logo	-95	<input type="checkbox"/> Inside caulk outlet	X
<input type="checkbox"/> Secondary flat strainer	-21	<input type="checkbox"/> Membrane clamp (min. 1 9/16" (40))	-C	<input type="checkbox"/> Extended wide elastomeric flange	-Z

Job Name _____	Page No: _____
Section No: _____	Contractor _____
Schedule No: _____	Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880