




FDC

1/2" thru 2" Double Check Backflow Assemblies



Function: The BEECO Friendly Double Check Backflow Preventer Valve is designed to stop the reverse of flow of a liquid into a potable water system. The proper installation of a backflow preventer must be done by a certified expert under local codes and guidelines to assure the protection of the drinking water system.

Ratings: Maximum working water pressure 175 PSI, Maximum working temperature 180° F Hydrostatic test pressure 350 PSI, End connection NPT threaded to ANSI B 1.20.1. Valves are designed and compliant with ASSE standard 1015 and CSA B64.5.

Features: Single access cover for fast service, Screwed on access cover for quick repairs, Easily removable checks, Modular design reducing number of spare parts, Self contained check so there is no pressure on the lid.

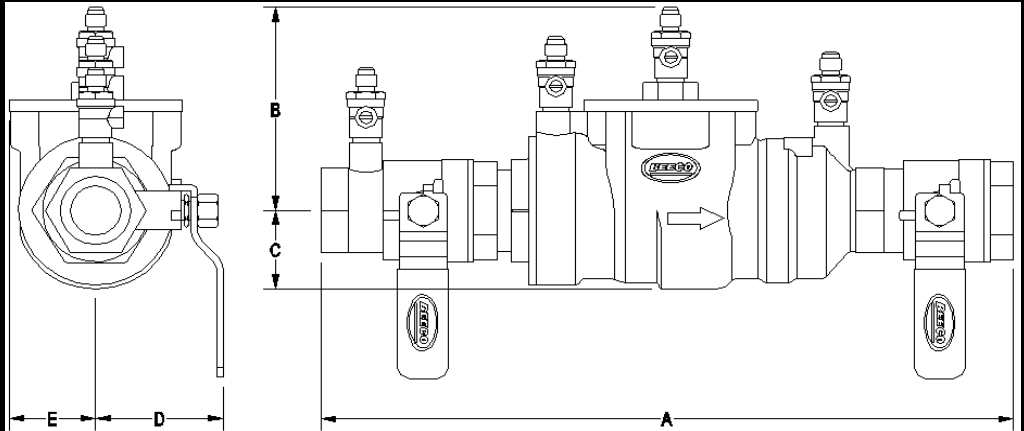

SIZE		A		B		C		D		E		WEIGHT	
In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	lbs.	kgs
1/2	13	10 1/4	260	3 3/8	86	1 1/8	29	2	50	1 1/4	32	4	1.8
3/4	19	10 1/2	266	3 3/8	86	1 1/8	29	2 1/2	64	1 1/4	32	4.5	2
1	25	12 1/2	317	3 1/2	89	1 3/8	35	2 1/2	64	1 1/2	38	6.4	2.9
1 1/4	32	14 1/4	262	4 3/8	111	1 3/4	44	2 3/4	70	1 3/4	44	10	4.5
1 1/2	38	14 3/4	375	4 3/8	111	1 3/4	44	3 3/8	86	1 3/4	44	12	5.4
2	50	17 1/4	438	4 7/8	124	2	50	3 1/2	89	2 1/4	57	19	8.5

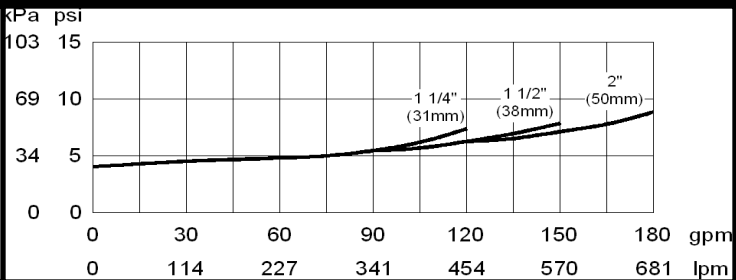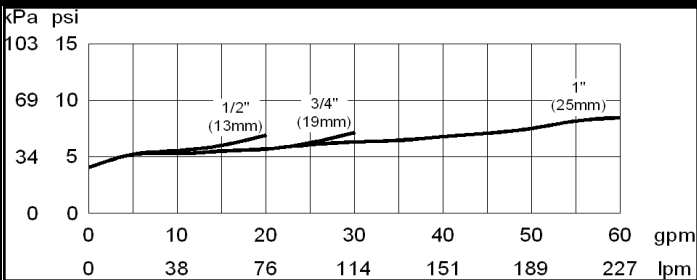

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

Please consult BEECO engineering to get the latest updates On materials and specifications.

www.beecobackflow.com 1321 West 119th Street, Chicago IL, 60643
 BEECO Canada 150 Norfich Drive Unit 4, Toronto, Ontario, Canada
 M3N 1X6. Tel (416) 679-0380 Toll Free 1-800-387-3880