




MFRU

UNINSULATED FIRE RATED ACCESS DOOR

Internet address: www.mifab.com

Toll Free: 1-800-465-2736

Canada Toll Free: 1-800-387-3880

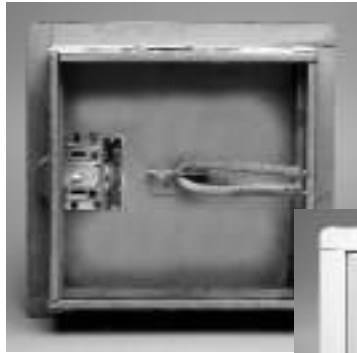

California State
Fire Marshall
Approval



SERIES MFRU

UNINSULATED FIRE RATED ACCESS DOOR
FOR WALLS ONLY

DESCRIPTION

The MIFAB® MFRU uninsulated fire rated access door is approved by Underwriters Laboratories Inc., for 1 1/2 hours, "B" label in walls. The door meets ANSI-UL 10B standards. It has a unique white finish.

SPECIFICATIONS

Material MFRU Series is 16 gage satincoat steel door and frame. The MFRU-SS stainless steel Series is 16 gage #304 stainless steel door and frame.

Finish Satincoat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

Door Flush to frame. Self-closing. Can be opened from the inside or back of the door with MIFAB's unique thumb turn latch.

Frame Four piece welded frame with masonry mounting straps.

Hinge Spring Concealed pivot pins.
Latch Heavy duty.

Latch Standard - Flush mounted, interchangeable turn ring operator and key operator latch. Optional - cylinder key lock. All of MIFAB's cylinder key locks are keyed alike.

Fire Rating Underwriters Laboratories "B" label. 1 1/2 hour for walls.

Insulation Not required.

Packaging One door per carton.


A-B Door Size

C-D Overall Dimensions - Door Size - Plus 2 5/8" (53)

E Wall Opening - Door Size - Plus 1/2" (13) (Allow an extra 1/4" (6) clearance for latch housing on "D" side).

STANDARD SIZES (special sizes available upon request)

DOOR SIZE		WALL OPENING		SHIPPING WEIGHT		LAT-CHES
Inches	mm	Inches	mm	lbs.	kg.	
"B" x "A"	"B" x "A"	Inches	mm	lbs.	kg.	
8 x 8	203 x 203	8 1/2 x 8 1/2	216 x 216	10.0	4.5	1
10 x 10	254 x 254	10 1/2 x 10 1/2	267 x 267	12.0	5.4	1
12 x 12	305 x 305	12 1/2 x 12 1/2	318 x 318	14.0	6.3	1
12 x 18	305 x 457	12 1/2 x 18 1/2	318 x 470	16.0	7.2	1
12 x 24	305 x 610	12 1/2 x 24 1/2	318 x 622	19.0	8.6	1
14 x 14	356 x 356	14 1/2 x 14 1/2	368 x 368	15.5	7.0	1
16 x 16	406 x 406	16 1/2 x 16 1/2	419 x 419	16.5	7.5	1
18 x 18	457 x 457	18 1/2 x 18 1/2	470 x 470	19.0	8.6	1
20 x 20	508 x 508	20 1/2 x 20 1/2	521 x 521	24.0	10.9	1
22 x 22	559 x 559	22 1/2 x 22 1/2	571 x 571	28.0	12.7	1
22 x 30	559 x 762	22 1/2 x 30 1/2	571 x 775	35.0	15.9	1
24 x 24	610 x 610	24 1/2 x 24 1/2	622 x 622	30.0	13.6	1
24 x 36	610 x 914	24 1/2 x 36 1/2	622 x 927	46.0	20.9	2
24 x 48	610 x 1219	24 1/2 x 48 1/2	622 x 1232	65.0	29.5	2
30 x 30	762 x 762	30 1/2 x 30 1/2	775 x 775	45.0	20.4	1
32 x 32	813 x 813	32 1/2 x 32 1/2	826 x 826	47.0	21.3	1
36 x 36	914 x 914	36 1/2 x 36 1/2	927 x 927	60.0	27.2	2
36 x 48	914 x 1219	36 1/2 x 48 1/2	927 x 1232	80.0	36.3	2
48 x 48	1219 x 1219	48 1/2 x 48 1/2	1232 x 1232	100.0	45.4	3

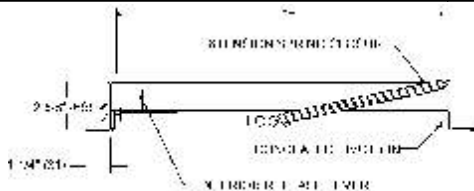

OPTIONAL VARIATIONS:

- Cylinder key lock
- Stainless steel

SUFFIX

- C
- SS

(Dimension) Denotes Millimetres

NOTE: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

