



Specification: MIFAB® Series MHY-50 self draining, moderate climate narrow wall hydrant with A.S.S.E. 1011 certified anti-siphon vandal resistant vacuum breaker. Operating kea furnished with each hydrant.

Applications: Designed for commercial applications in moderate climate areas to fit within a 4" (100) wall.

Plumbing and Drainage
Mechanical Section

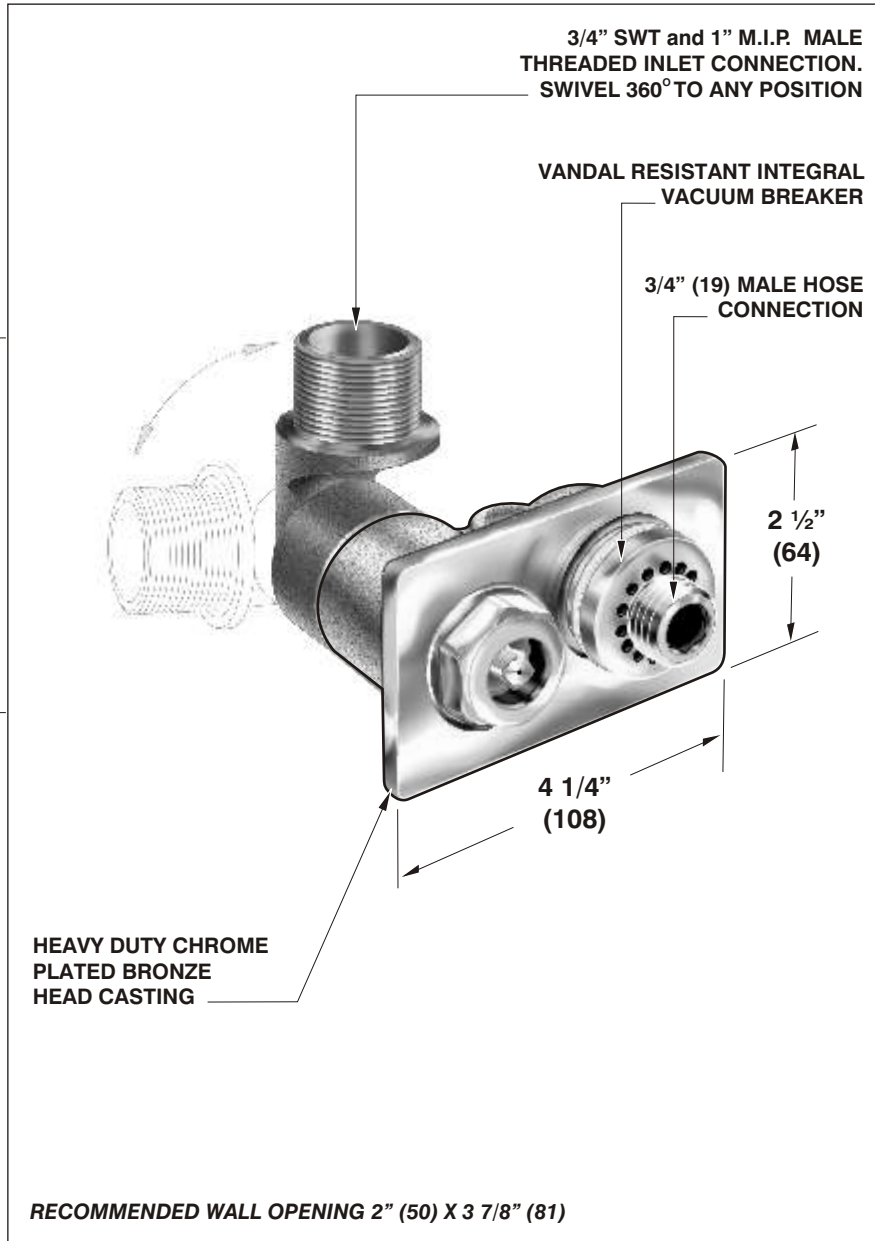

Overhead view

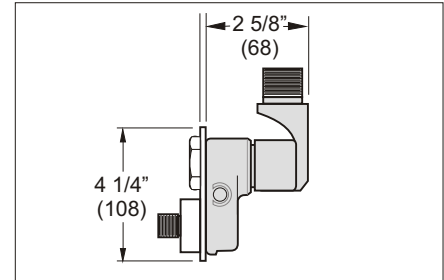

MIFAB® MHY-50 Series Features

- **INTERNAL COMPONENTS** - hardened bronze operating stem and one piece neoprene plunger.
- **VACUUM BREAKER** - unique self draining vandal resistant integral vacuum breaker protects from anti-siphon conditions.
- **FACE PLATE** - polished chrome plated.
- **WATER SUPPLY CONNECTION** - swivel 360° to any position.
- **APPROVALS** - MHY-50 wall hydrant is listed with I.A.P.M.O. and manufactured with an anti-siphon vacuum breaker that is tested and certified to the A.S.S.E. Standard 1011.



RECOMMENDED WALL OPENING 2" (50) X 3 7/8" (81)

(Dimensions) Donates Millimeters

MODEL NO.	OVERALL LENGTH		APPROXIMATE WEIGHT		SWIVEL INLET CONNECTION
	IN	MM	Lbs.	Kg.	IN
MHY-50	2 5/8	68	1	0.5	3/4" SWT, 1"M.I.P.

- OPTIONAL VARIATIONS:**
- | | |
|--|-----|
| <input type="checkbox"/> 1" (25) Hose connection | -0 |
| <input type="checkbox"/> Polished bronze face | -2 |
| <input type="checkbox"/> Wall clamp | -WC |

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____