



MHY-65

POST HYDRANT

Internet address: www.mifab.com

Toll Free: 1-800-465-2736


Canada Toll Free: 1-800-387-3880

SPECIFICATION: MIFAB® Series MHY-65 _____ (specify length) non freeze post hydrant with exposed bronze head and combination 3/4" (19) female and 1" (25) male inlet connection. Hydrant assembly complete with one piece neoprene plunger, hardened bronze operating stem, 1" (25) galvanized steel casing, heavy duty bronze head casting with head nut assembly, 3/8" (9) diameter galvanized steel operating rod, decorative casing guard, tapped 1/8" (3) drain port in the bronze tailpiece, and an operating key.

OPERATION: Opening the hydrant will allow water to flow freely from the hose connection and seal the drain port to prevent water from being wasted. Closing the hydrant opens the drain port to allow existing water in the hydrant to drain to prevent freezing.

FEATURES: The 1" (25) galvanized steel casing will prevent rust and deterioration in acidic ground areas. The head nut assembly can be removed for ready access to internal parts.

APPLICATIONS: Intended for installation in exterior deck areas, farms, golf courses, parks, recreation and landscaped areas to provide a ready supply of potable water.

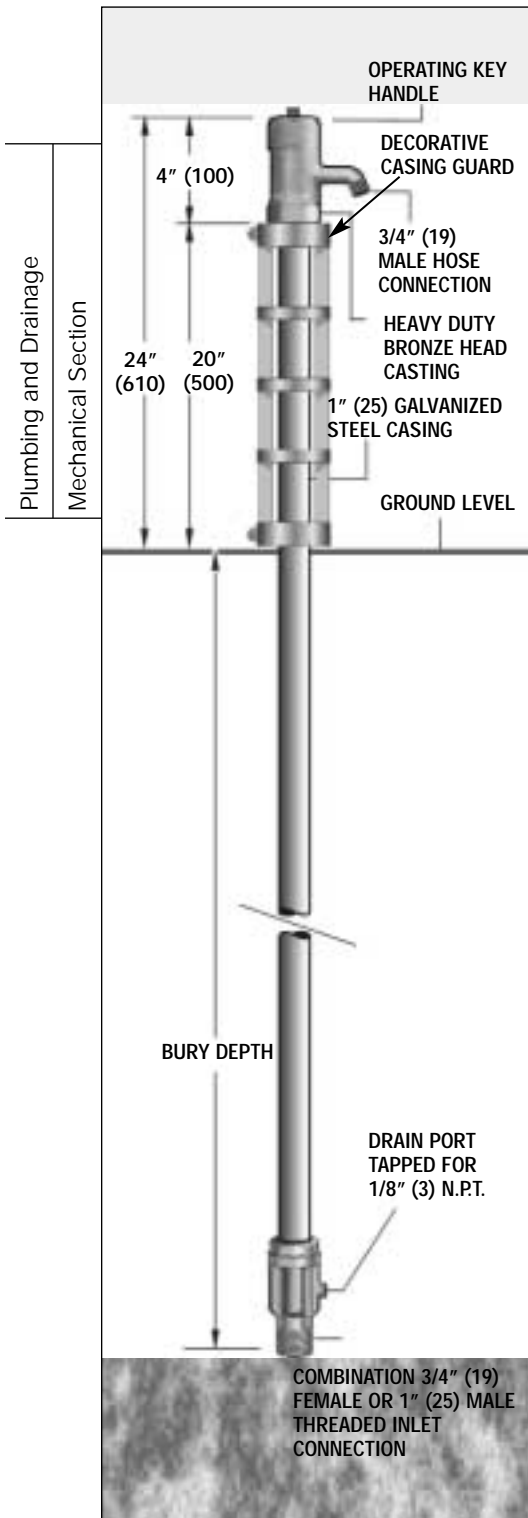

MODEL NO.	OVERALL LENGTH		BURY DEPTH		APPROXIMATE WEIGHT	
	IN	MM	FT	CM	Lbs.	Kg.
MHY-651	36	91.4	1	30.4	8	3.63
MHY-652	48	122.0	2	60.9	10	4.53
MHY-653	60	152.0	3	91.4	13	5.89
MHY-654	72	183.0	4	121.9	15	6.80
MHY-655	84	213.0	5	155.4	17	7.71
MHY-656	96	244.0	6	182.9	19	8.61
MHY-657	108	274.0	7	213.4	21	9.52
MHY-658	120	305.0	8	243.8	23	10.43
MHY-659	132	355.0	9	274.3	25	11.34
MHY-6510	144	366.0	10	304.8	27	12.24

OPTIONAL VARIATIONS:

- 1" (25) hose connection suffix -0
- Vacuum breaker (Certified to A.S.S.E. Standard 1011 and listed with I.A.P.M.O.) suffix -8
- Wheel handle suffix -12
- 1" (25) brass casing suffix -40
- 3/8" (9) brass operating rod suffix -41
- Chrome plated bronze head casting suffix -49

(Dimension) Denotes Millimetres