MHY-95

ANTI-CONTAMINATION WALL FAUCET WITH FLUSH MOUNTED WALL BOX

Internet address: www.mifab.com Toll Free: 1-800-465-2736 Canada Toll Free: 1-800-387-3880

SPECIFICATION: MIFAB® Series MHY-95 encased type, mild climate, anti-contamination wall faucet with 3/4" (19) male hose connection and anti-siphon vacuum breaker complete with flush mounted brass wall box. Exterior finish of the faucet to be (specify brass, chrome plated, or polished chrome plated), operating handle to be (specify brown plastic, clear plastic, cast iron wheel handle or operating key), and inlet connection to be (specify 1/2" (13) or 3/4" (19) F.P.T.). Vacuum breaker to be certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.

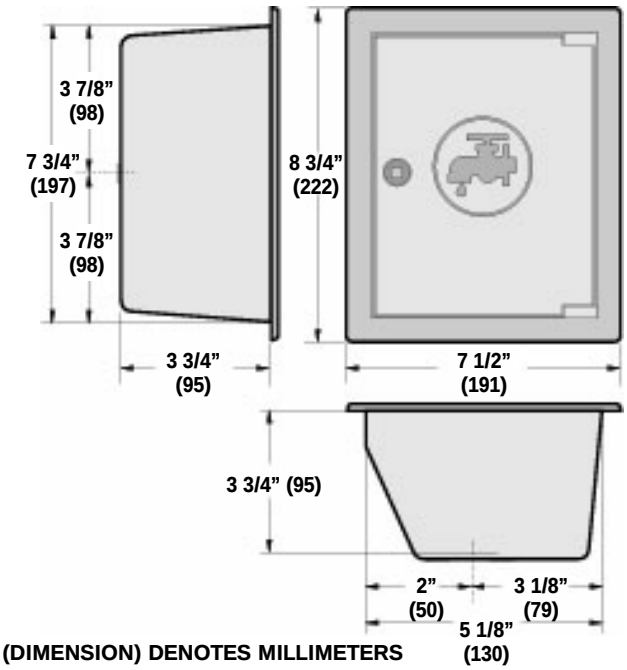

(DIMENSION) DENOTES MILLIMETERS

DESCRIPTION: MIFAB's MHY-95 Series of anti-contamination wall faucet complete with flush mounted wall box is engineered for use in mild climate on residential, commercial, industrial and institutional properties. It is manufactured and shipped with an anti-siphon vacuum breaker and operating key.

EXTERIOR FINISH: Standard finish is cast brass for the wall box. Three different finishes are available for the faucet. They are: brass, polished chrome and/or chrome plated brass casting.

OPERATING HANDLE: Four different types of operating handles are available for the faucet. They are: brown plastic wheel handle, clear plastic wheel handle, cast iron wheel handle and/or an operating key. The operating key will also unlock the wall box.

VACUUM BREAKER: Unique vandal resistant vacuum breaker protects from anti-siphon conditions. It is self draining and it is engineered with fine male threads on the end that screws into the faucet body to ensure that the vacuum breaker must be in place in order for a hose connection to be secured to the faucet. The hose connection is 3/4" (19) male. The anti-siphon vacuum breaker is tested and certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.

SHIPPING WEIGHT: 10 lbs. (4.55 kg.) per unit.

CONNECTION: Either 1/2" (13) or 3/4" (19) F.P.T. (female pipe thread connections). Only N.P.T. (tapered) threads can be used to connect the MHY-90 to the supply line. Do not use N.P.S.M. (straight) threads.

OPTIONAL VARIATIONS:

☐ Chrome plated brass box	suffix -49
☐ Cylinder key lock	suffix -K

(Dimension) Denotes Millimetres