




MI-G-L

LOW ROUGH IN GREASE INTERCEPTOR

Specification: MIFAB® Series MI-G-L ___ sanitary powder epoxy coated inside and outside fabricated 10 gauge steel grease interceptor with flow rating of ___ (indicate) and grease holding capacity of ___ (indicate). Unit shall include: removable baffle assembly and cross bar, securing bolt(s), external vented flow control fitting, internal air relief by pass, feet underneath interceptor to elevate it 1/2" off the ground, and steel powder epoxy coated rectangular gasketed lid.

Function: Used in restaurants, kitchens, institutions and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. External flow control fitting must be installed according to manufacturer's instructions to control rate of flow into the interceptor and therefore, the operating efficiency. Interceptor may be installed on the ground, semi recessed or flush with the floor. Standard powder epoxy coated lid and body ensures maximum protection from contaminants. 1/2" feet underneath the interceptor elevate the bottom steel plate from the wet ground.

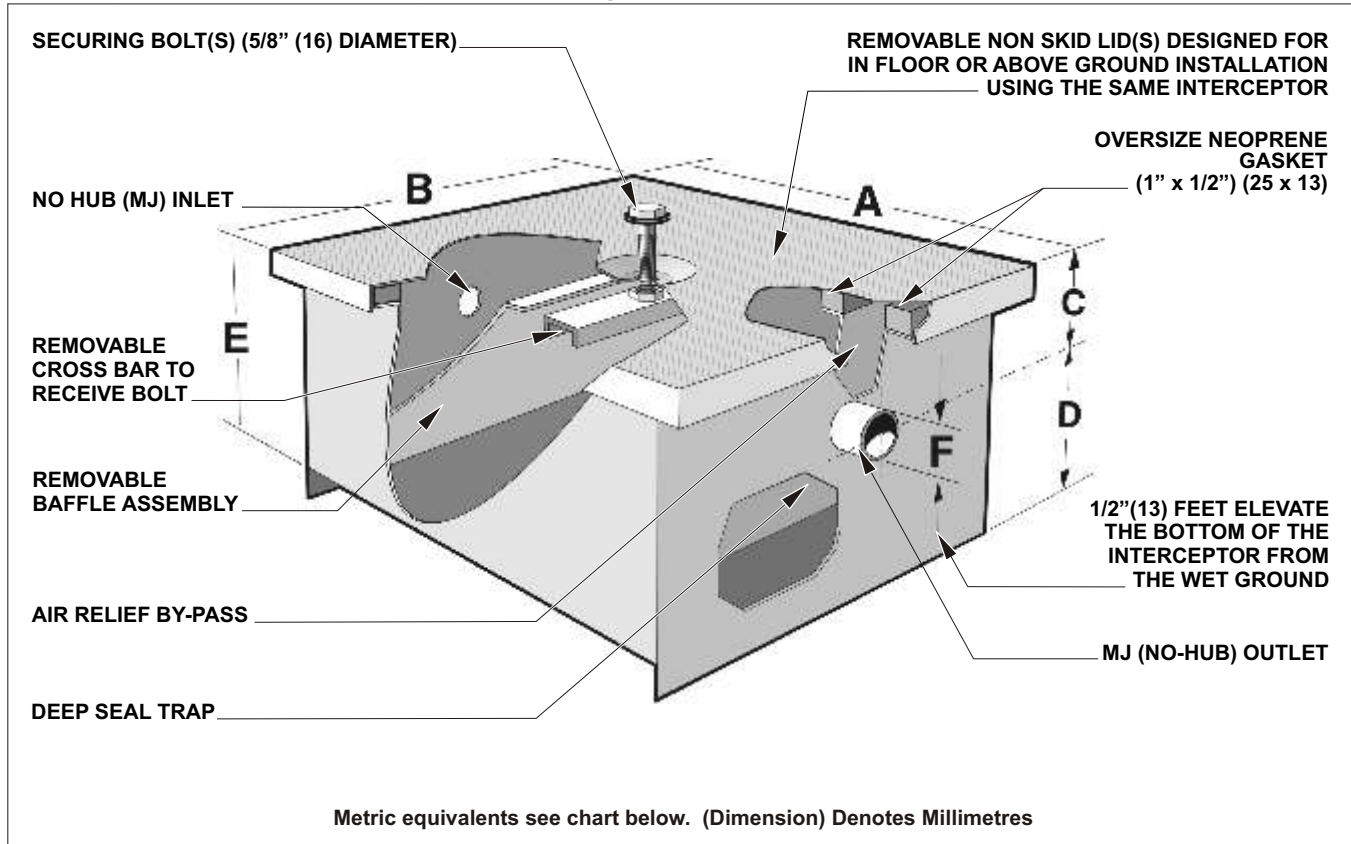

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.



MODELS MI-G-L-20 TO MI-G-L-35 ARE TESTED AND CERTIFIED TO I.A.P.M.O. GREASE TRAP STANDARD PS-13-89



MODELS MI-G-L-20 TO MI-G-L-35 ARE TESTED AND CERTIFIED TO THE PLUMBING AND DRAINAGE INSTITUTE STANDARD PDI-G101

All PDI interceptors are shipped with an external, vented, flow control fitting.

MODEL NO.	US GPM	CAP. LBS.	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	SHIPPING WEIGHT (lbs.)	WEIGHT WHEN FILLED WITH WATER (lbs.)
MI-G-L-20	20	40	34" (864)	24" (610)	4" (102)	7" (178)	11" (279)	3" (76)	1	4	150	293
MI-G-L-35	35	70	42" (1067)	28" (711)	4" (102)	7" (178)	11" (279)	3" (76)	2	8	200	410
MI-G-L-50	50	100	46" (1168)	30" (762)	4" (102)	7" (178)	11" (279)	3" (76)	2	8	225	470

Note: Reduce the "A" and "B" dimensions by 1" (25) to determine the actual body length and width dimensions. The lid overhangs the body by 1/2" (13) On all four sides.

OPTIONAL VARIATIONS:

- Aluminum lid(s)
- Anode pack
- Dual inlets
- Special size inlet and outlet
- Enzyme port

SUFFIX

- AL
- AP
- DI
- specify
- EP
- Anchor flange
- Anchor flange and membrane clamp
- Heavy duty reinforced lid(s)
- Sediment bucket

SUFFIX

- FL
- FLM
- HD
- SB
- Stainless steel interceptor
- F.I.P. female threaded inlet and outlet
- Lid to receive tile or terrazzo
- SS
- T
- TL

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880