


Specification: MIFAB® Series MI-G-SD _____ sanitary powder epoxy coated inside and outside fabricated 10 gauge steel grease interceptor with flow rating of _____ (indicate) and grease holding capacity of _____ (indicate). Unit shall include: removable baffle assembly and cross bar, deep seal trap covered by lid, sewer gas stopper, securing bolt(s), external vented flow control fitting, internal air relief by pass, feet underneath interceptor to elevate it 1/2" off the ground, internal grease retention tray adjacent to grease draw-off valve and steel powder epoxy coated non skid rectangular gasketed lid(s).

Function: Used in restaurants, kitchens, institutions and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. Semi-automatic draw-off valve design permits removal of accumulated FOG without cover removal. Follow the manufacturer's maintenance instructions to liquefy the accumulated grease before removal through the draw-off valve. This cleaning process is more efficient compared to standard types of grease interceptors. External flow control fitting must be installed according to manufacturer's instructions to control rate of flow into the interceptor and therefore, the operating efficiency. Interceptor may be installed on the ground, semi recessed or flush with the floor. Standard powder epoxy coated lid and body ensures maximum protection from contaminants. Sewer gas stopper prevents foul odors from entering the kitchen area through the interceptor. 1/2" feet underneath the interceptor elevate the bottom steel plate from the wet ground.

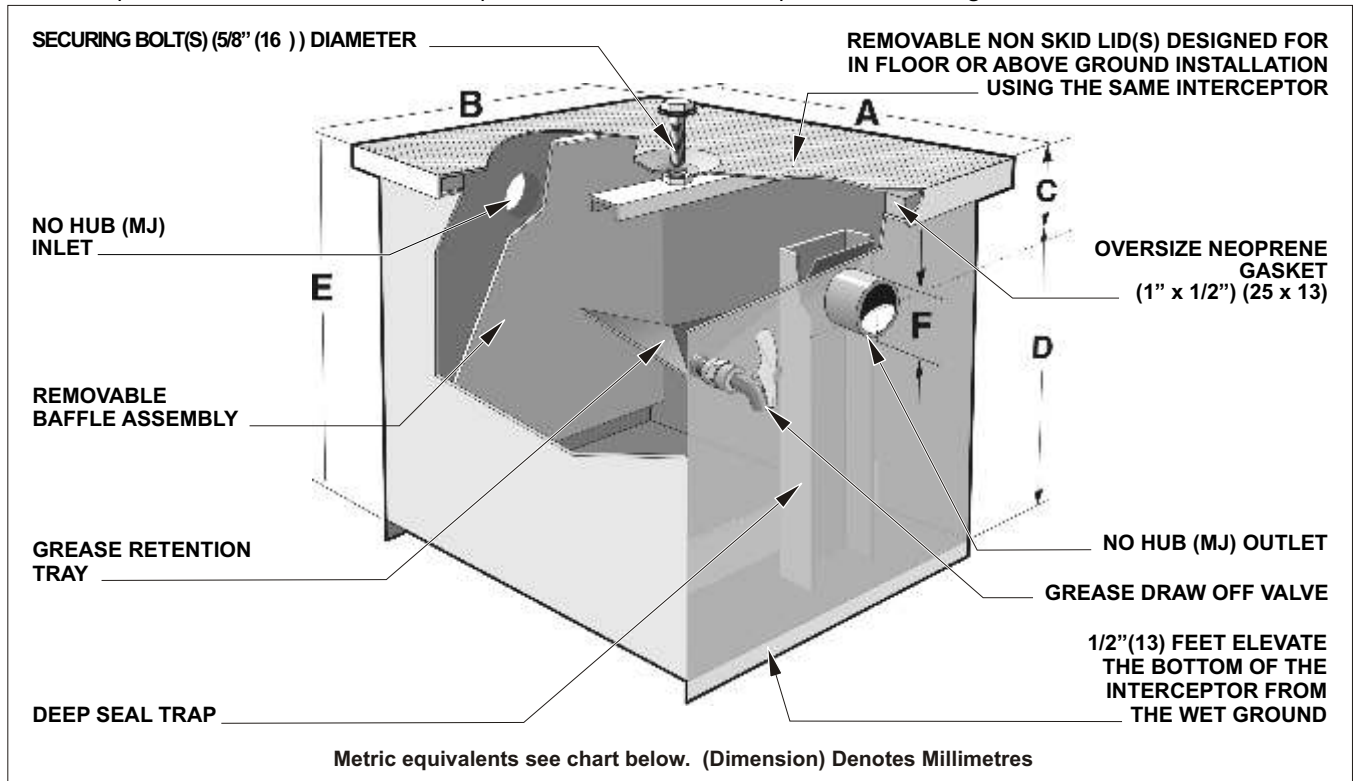

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

MODEL NO.	US GPM	CAP. LBS.	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	SHIPPING WEIGHT (lbs.)	WEIGHT WHEN FILLED WITH WATER (lbs.)
MI-G-SD-1	7	14	17.75" (451)	13.75" (349)	3.5" (89)	8.5" (216)	12" (305)	2" (51)	1	1	65	118
MI-G-SD-2	10	20	21.25" (540)	15.75" (400)	3.5" (89)	9.5" (241)	13" (330)	2" (51)	1	1	85	169
MI-G-SD-3	15	30	23.75" (603)	15.75" (400)	3.5" (89)	11.5" (292)	15" (381)	2" (51)	1	1	100	217
MI-G-SD-4	20	40	23.75" (603)	15.75" (400)	3.5" (89)	14" (356)	17.5" (444)	3" (76)	1	1	105	245
MI-G-SD-5	25	50	27.75" (705)	18.75" (476)	3.5" (89)	14" (356)	17.5" (444)	3" (76)	1	1	140	340
MI-G-SD-6	35	70	31.25" (794)	23.75" (603)	5.5" (140)	16.5" (419)	22" (559)	3" (76)	1	4	205	558
MI-G-SD-7	50	100	31.25" (794)	23.75" (603)	5.5" (140)	18.5" (470)	24" (610)	3" (76)	1	4	215	615
MI-G-SD-8	75	150	42" (1067)	28" (711)	6" (140)	26" (660)	32" (813)	3" (76)	2	8	355	1292

Note: Reduce the "A" and "B" dimensions by 1" (25) to determine the actual body length and width dimensions. The lid overhangs the body by 1/2" (13) on all four sides.

- | | | | |
|--|----------------|--|---------------|
| OPTIONAL VARIATIONS: | SUFFIX | SUFFIX | SUFFIX |
| <input type="checkbox"/> Aluminum lid(s) | -AL | <input type="checkbox"/> Anchor flange | -FL |
| <input type="checkbox"/> Anode pack | -AP | <input type="checkbox"/> Anchor flange and membrane clamp | -FLM |
| <input type="checkbox"/> Extension "C" as required | specify MI-CSD | <input type="checkbox"/> Heavy duty reinforced lid(s) | -HD |
| <input type="checkbox"/> Enzyme port | -EP | <input type="checkbox"/> Sediment bucket | -SB |
| | | <input type="checkbox"/> Stainless steel interceptor | -SS |
| | | <input type="checkbox"/> I.P.S. female threaded inlet and outlet | -T |
| | | <input type="checkbox"/> Lid(s) to receive tile or terrazzo | -TL |

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____