


Specification: MIFAB® Series MI-G ___ sanitary powder epoxy coated inside and outside fabricated 10 gauge steel grease interceptor with flow rating of ___ (indicate) and grease holding capacity of ___ (indicate). Unit shall include: removable baffle assembly and cross bar, deep seal trap covered by lid, sewer gas stopper, securing bolt(s), external vented flow control fitting, internal air relief by pass, feet underneath interceptor to elevate it 1/2" off the ground, and steel powder epoxy coated, non skid, rectangular gasketed lid(s). Interceptor shall be tested and certified to the P.D.I. Standard PDI-G101 and be so marked.

Function: Used in restaurants, kitchens, institutions and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. External flow control fitting must be installed according to manufacturer's instructions to control rate of flow into the interceptor and therefore, the operating efficiency. Interceptor may be installed on the ground, semi recessed or flush with the floor. Single bolt lid design permits fast and easy removal of the lid for cleaning and maintenance. Standard powder epoxy coated lid and body ensures maximum protection from contaminants, Sewer gas stopper prevents foul odors from entering the kitchen area through the interceptor. 1/2" feet underneath the interceptor elevate the bottom steel plate from the wet ground.

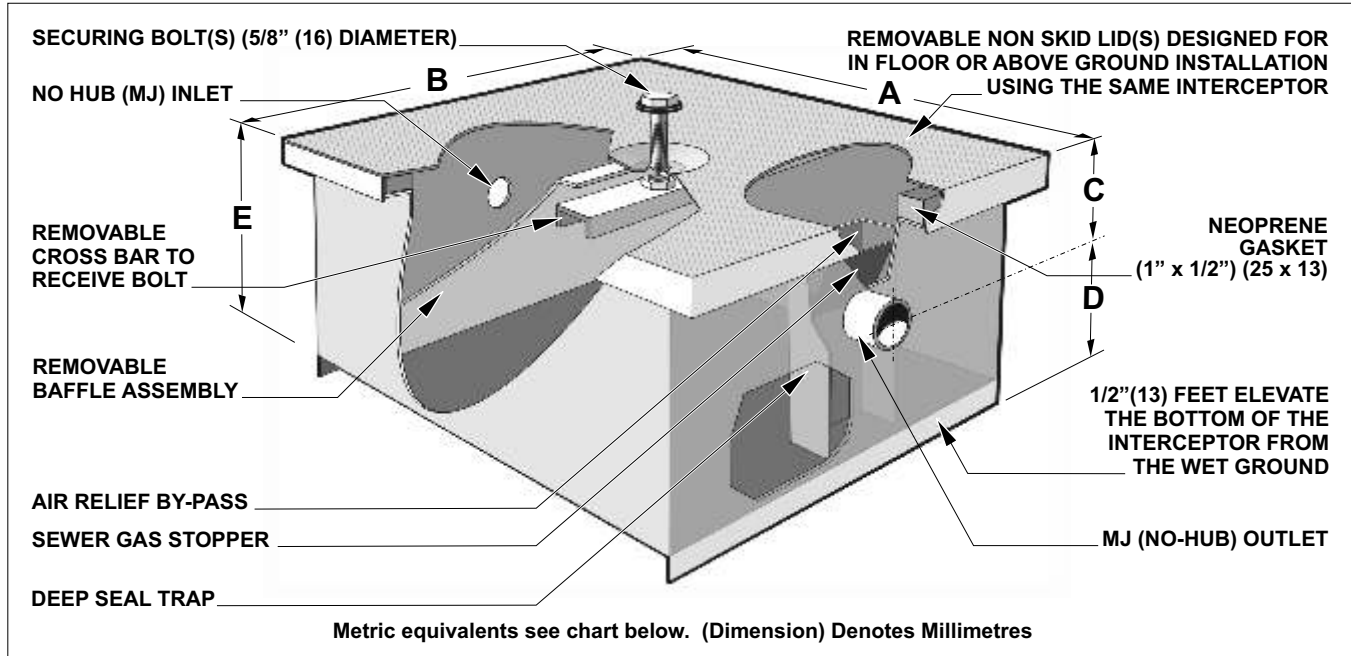

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

MODELS MI-G-4-P TO MI-G-7-P ARE TESTED AND CERTIFIED TO I.A.P.M.O. GREASE TRAP STANDARD PS-13-89

MODELS MI-G-O-P TO MI-G-7-P ARE TESTED AND CERTIFIED TO THE PLUMBING AND DRAINAGE INSTITUTE STANDARD PDI-G101

All PDI interceptors are shipped with an external, vented, flow control fitting.

MODEL NO.	US GPM	CAP. LBS.	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	SHIPPING WEIGHT (lbs.)	WEIGHT WHEN FILLED WITH WATER (lbs.)
MI-G-0	4	8	16.75" (425)	11.25" (286)	2.5" (63)	8.5" (216)	11" (279)	2" (51)	1	1	50	87
MI-G-1	7	14	17.75" (451)	13.75" (349)	3.5" (89)	8.5" (216)	12" (305)	2" (51)	1	1	60	111
MI-G-2	10	20	21.25" (540)	15.75" (400)	3.5" (89)	9.5" (241)	13" (330)	2" (51)	1	1	80	162
MI-G-3	15	30	23.75" (603)	15.75" (400)	3.5" (89)	11.5" (292)	15" (381)	2" (51)	1	1	95	209
MI-G-4	20	40	23.75" (603)	15.75" (400)	3.5" (89)	14" (356)	17.5" (444)	3" (76)	1	1	100	235
MI-G-5	25	50	27.75" (705)	18.75" (476)	3.5" (89)	14" (356)	17.5" (444)	3" (76)	1	1	125	320
MI-G-6	35	70	31.25" (794)	23.75" (603)	5.5" (140)	16.5" (419)	22" (559)	3" (76)	1	4	185	531
MI-G-7	50	100	31.25" (794)	23.75" (603)	5.5" (140)	18.5" (470)	24" (610)	3" (76)	1	4	195	587

Note: Reduce the "A" and "B" dimensions by 1" (25) to determine the actual body length and width dimensions. The lid overhangs the body by 1/2" (13) On all four sides.

- | | | | |
|--|---------------|---|---------------|
| OPTIONAL VARIATIONS: | SUFFIX | SUFFIX | SUFFIX |
| <input type="checkbox"/> Aluminum lid(s) | -AL | <input type="checkbox"/> Anchor flange | -FL |
| <input type="checkbox"/> Anode pack | -AP | <input type="checkbox"/> Anchor flange and membrane clamp | -FLM |
| <input type="checkbox"/> Extension "C" as required | -C | <input type="checkbox"/> Heavy duty reinforced lid(s) | -HD |
| <input type="checkbox"/> Dual inlets | -DI | <input type="checkbox"/> H-20 traffic rated lid | -H-20 |
| <input type="checkbox"/> Special size inlet and outlet specify | | <input type="checkbox"/> Sediment bucket | -SB |
| | | <input type="checkbox"/> Stainless steel interceptor | -SS |
| | | <input type="checkbox"/> F.I.P female threaded inlet and outlet | -T |
| | | <input type="checkbox"/> Lid(s) to receive tile or terrazzo | -TL |

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____