


**Specification:** MIFAB® Series R1100-G lacquered cast iron roof drain with anchor flange, cast iron waterproofing membrane clamp ring with integral gravel stop, stainless steel perforated 6" (152) high ballast guard with 1/2" (13) round drainage openings and standard self-locking polyethylene dome strainer with a free area of 43 square inches.

**Function:** Used in any type of flat roofs and gutters that use the insulated membrane assembly method of waterproofing (I.R.M.A.). Typical when built-up felt and asphalt waterproofing is installed on top of the roof membrane for protection against the elements. The 6" high perforated stainless steel ballast guard is furnished to retain the crushed gravel used in flat roof construction. The 1/2" diameter holes allow for drainage without clogging. 8" diameter body is ideal for applications with limited space. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

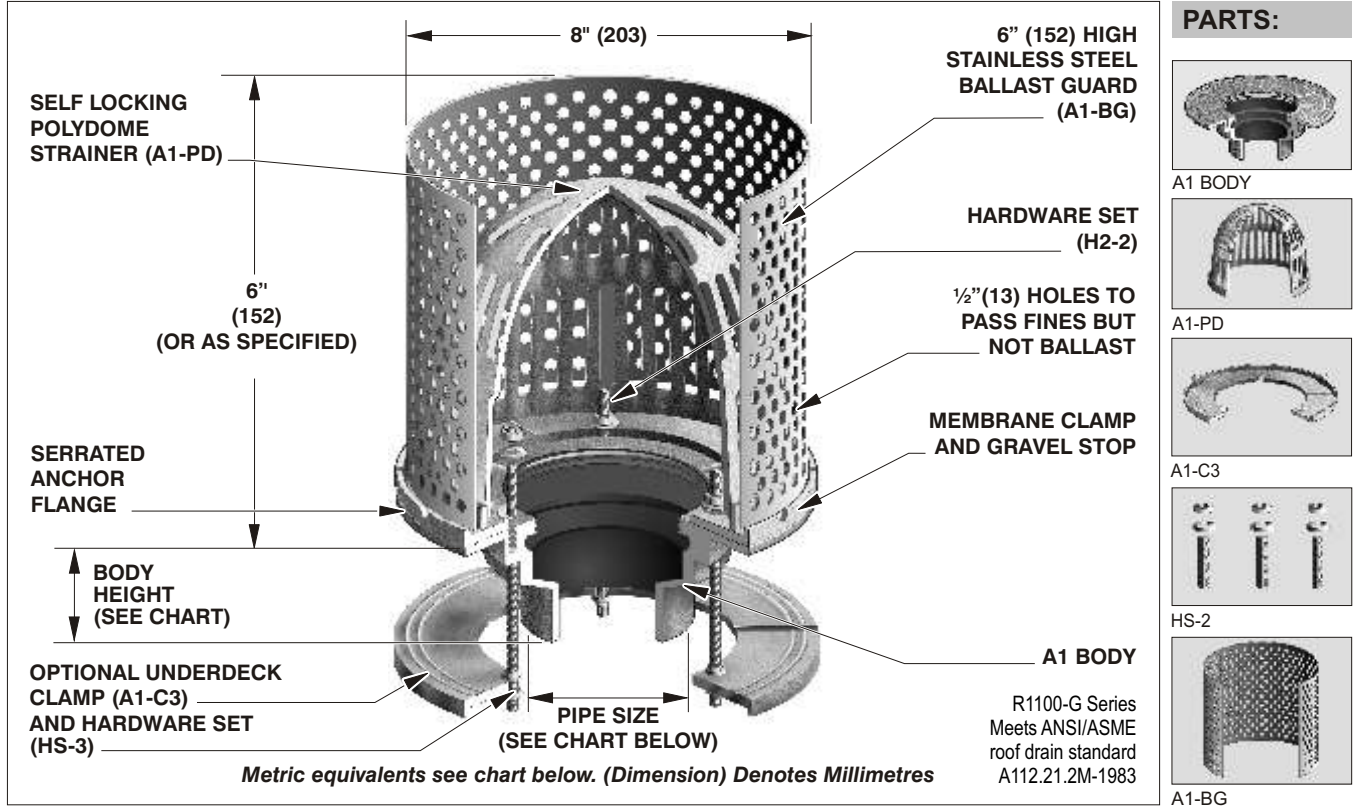

**Note:** Deck opening - 6 3/8" (162) with sump receiver - 8 1/2" (216)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
4" (102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
5" (127)	2 3/4" (70)	-	2 5/8" (67)	3 3/4" (95)	-
6" (152)	3 1/4" (83)	4 3/4" (121)	-	-	-

<b>OPTIONAL VARIATIONS:</b>	<b>SUFFIX</b>	<b>SUFFIX</b>	<b>SUFFIX</b>
<input type="checkbox"/> Sediment bucket	-5	<input type="checkbox"/> Stainless steel body (Type 316)	-29
<input type="checkbox"/> Vandal proof dome	-6	<input type="checkbox"/> PVC socket connection body	-30
<input type="checkbox"/> Acid resistant epoxy coating	-11	<input type="checkbox"/> ABS socket connection body	-31
<input type="checkbox"/> Galvanized metal dome	-12	<input type="checkbox"/> Rough bronze dome	-81
<input type="checkbox"/> All galvanized	-13	<input type="checkbox"/> Stainless steel mesh screen over dome	-83
<input type="checkbox"/> Flat grate	-14	<input type="checkbox"/> Threaded side outlet (2", 3", 4")	-90
<input type="checkbox"/> (replaces dome strainer)	-14	<input type="checkbox"/> No Hub side outlet (cast iron only) (2", 3", 4")	-90NH
<input type="checkbox"/> Bronze body	-27	<input type="checkbox"/> Sump receiver	-B
<input type="checkbox"/> Stainless steel body (Type 304)	-28	<input type="checkbox"/> Secondary clamp	-C
		<input type="checkbox"/> Adjustable extension	-E
		<input type="checkbox"/> Metal dome	-M
		<input type="checkbox"/> Push on outlet	P
		<input type="checkbox"/> No hub outlet	(Standard)
		<input type="checkbox"/> Threaded outlet	T
		<input type="checkbox"/> Underdeck clamp	-U
		<input type="checkbox"/> Underdeck clamp with cutaway side	-U3
		<input type="checkbox"/> Water proofing flange	-W-1
		<input type="checkbox"/> Inside caulk outlet	X
		<input type="checkbox"/> Vertical expansion joint (see R1900)	-XJ
		<input type="checkbox"/> Extended wide elastomeric flange	-Z

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_