
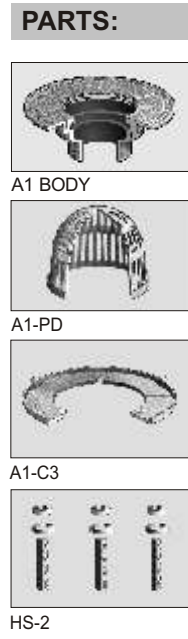


Specification: MIFAB® Series R1100 lacquered cast iron roof drain with anchor flange, cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking polyethylene dome strainer with a free area of 43 square inches.

Function: Used in any type of flat roofs and gutters. 8" diameter body is ideal for applications with limited space. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

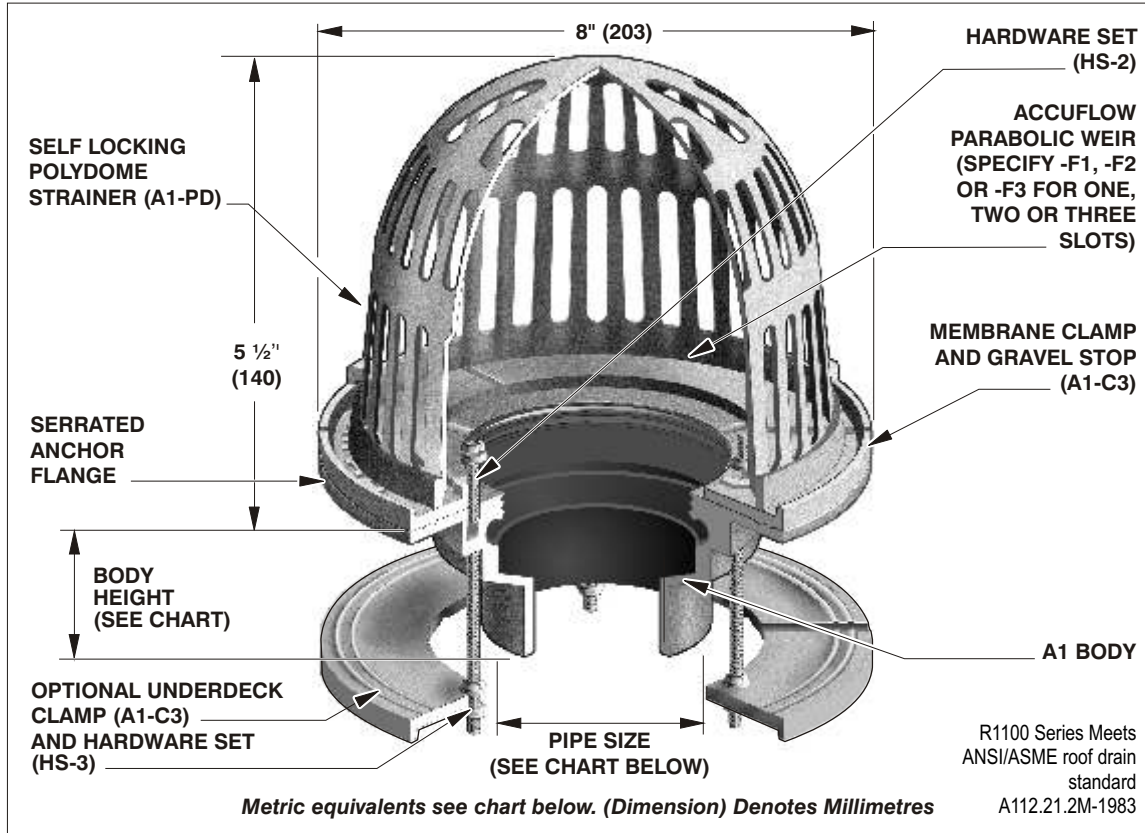

Note: Deck opening - 6 3/8" (162) with sump receiver - 8 1/2" (216)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	2 3/4" (70)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
3" (76)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
4" (102)	2 3/4" (70)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3" (76)
5" (127)	2 3/4" (70)	—	2 5/8" (67)	3 3/4" (95)	—
6" (152)	3 1/4" (83)	4 3/4" (121)	—	—	—

OPTIONAL VARIATIONS:

- Sediment bucket -5
- Vandal proof dome -6
- Acid resistant epoxy coating -11
- Galvanized metal dome -12
- All galvanized -13
- Flat grate (replaces dome strainer) -14
- Bronze body -27
- Stainless steel body (Type 304) -28
- Stainless steel body (Type 316) -29
- PVC socket connection body -30
- ABS socket connection body -31

SUFFIX

- Rough bronze dome -81
- Stainless steel mesh screen over dome -83
- Threaded side outlet (2",3",4") -90
- No Hub side outlet (cast iron only) (2",3",4") -90NH
- Sump receiver -B
- Secondary clamp -C
- Adjustable extension -E
- Accuflow (parabolic weir) specify -F1, -F2, -F3
- Stainless steel ballast guard -G
- S.S. ballast guard with secondary clamp -JC

SUFFIX

- Metal dome -M
- Push on outlet P
- 2" external water dam -R
- No hub outlet (Standard)
- Threaded outlet T
- Underdeck clamp -U
- Underdeck clamp with cutaway side -U3
- Adjustable water dam -W
- Water proofing flange -W-1
- Inside caulk outlet X
- Vertical expansion joint (see R1900) -XJ
- Extended wide elastomeric flange -Z

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____