




R1200-HC

LARGE SUMP ROOF DRAIN WITH ADJUSTABLE BALLAST GUARD FOR IRMA ROOFS

Specification: MIFAB® Series R1200-HC lacquered cast iron deep sump roof drain with 15" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, adjustable extension with auxiliary drainage slots, secondary clamp, and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: For roofs that use the insulated membrane assembly method of waterproofing (I.R.M.A.). Typical when built-up felt and asphalt waterproofing is installed on top of the roof membrane for protection against the elements. The adjustable ballast guard is furnished to retain the crushed gravel used in flat roof construction. The adjustability provides the installer with an 1 1/2" range of adjustment relative to the thickness of the insulation. The slots allow for drainage without clogging. Large free area dome provides for efficient drainage of rain water and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

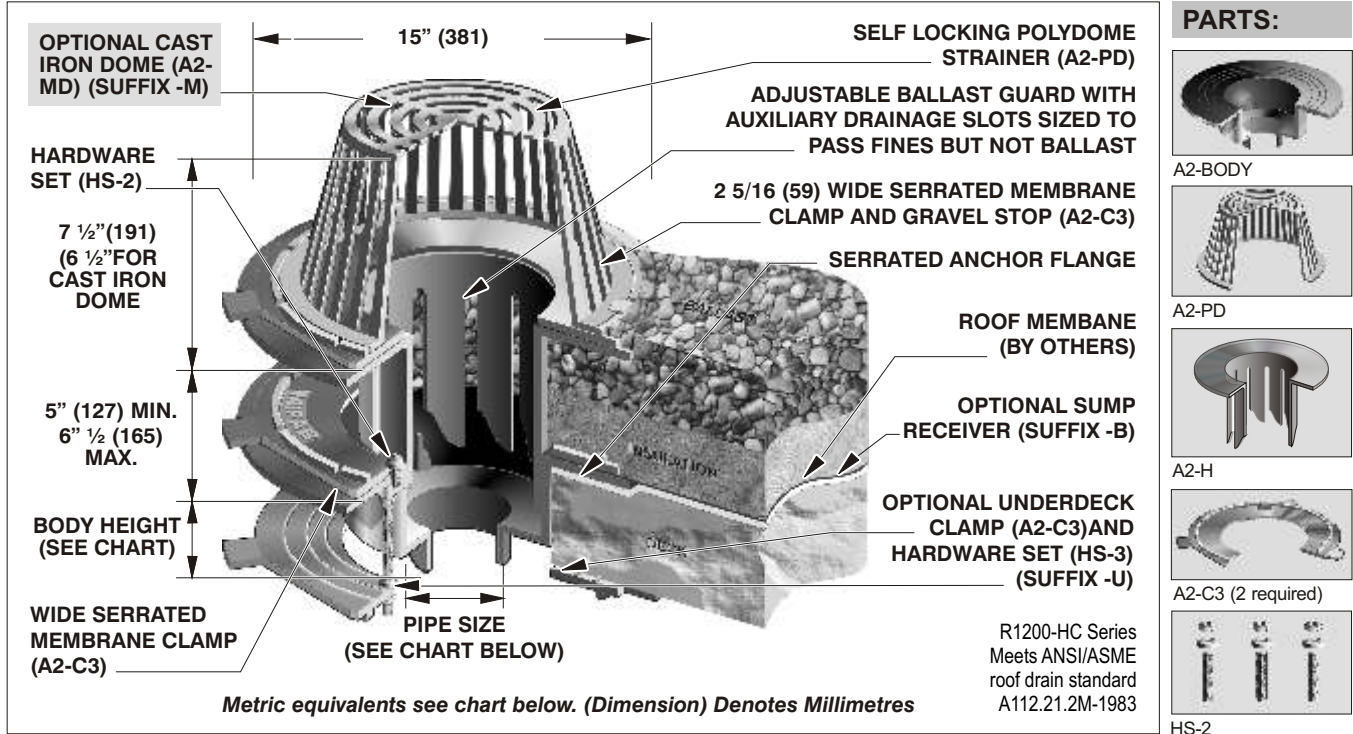

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	5 7/16" (138)	-	5 7/16" (138)	6 1/4" (159)	-
6" (152)	5 7/8" (149)	8" (203)	6" (152)	6 1/4" (159)	-
8" (203)	5 7/8" (149)	-	-	5 5/8" (143)	-

OPTIONAL VARIATIONS:	SUFFIX	SUFFIX	SUFFIX
<input type="checkbox"/> Sediment bucket	-5	<input type="checkbox"/> Stainless steel mesh screen over dome	-83
<input type="checkbox"/> Vandal proof dome	-6	<input type="checkbox"/> Threaded side outlet (2", 3", 4")	-90
<input type="checkbox"/> Acid resistant epoxy coating	-11	<input type="checkbox"/> No Hub side outlet (cast iron only) (2", 3", 4")	-90NH
<input type="checkbox"/> Galvanized metal dome	-12	<input type="checkbox"/> No hub outlet (Standard)	-B
<input type="checkbox"/> All galvanized	-13	<input type="checkbox"/> Sump receiver	-BDP
<input type="checkbox"/> Flat grate (replaces dome strainer)	-14	<input type="checkbox"/> Q-deck bolt on sump receiver	-BDP
<input type="checkbox"/> Bronze body	-27	<input type="checkbox"/> Accuflow (parabolic weir) specify	-F1, -F2, -F3
<input type="checkbox"/> Stainless steel body (Type 304)	-28	<input type="checkbox"/> Stainless steel perforated ballast guard	-G
<input type="checkbox"/> Stainless steel body (Type 316)	-29	<input type="checkbox"/> Adj. S.S. ballast guard with secondary clamp	-JC
<input type="checkbox"/> PVC socket connection body	-30	<input type="checkbox"/> Cast iron dome	-M
<input type="checkbox"/> ABS socket connection body	-31	<input type="checkbox"/> Low profile aluminum dome	-M-80
<input type="checkbox"/> Rough bronze dome	-81	<input type="checkbox"/> Push on outlet	P
		<input type="checkbox"/> 2" external water dam	-R
		<input type="checkbox"/> Threaded outlet	T
		<input type="checkbox"/> Underdeck clamp	-U
		<input type="checkbox"/> Underdeck clamp with cutaway side	-U3
		<input type="checkbox"/> Adjustable water dam (4" dia.)	-W
		<input type="checkbox"/> Water proofing flange	-W-1
		<input type="checkbox"/> 6" diameter adjustable water dam	-W6
		<input type="checkbox"/> Inside caulk outlet	X
		<input type="checkbox"/> Vertical expansion joint (see R1900)	-XJ
		<input type="checkbox"/> Extended wide deck flange	-Z

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____