




R1200-RS

LARGE SUMP ROOF DECK CONDENSATE RECEPTOR DRAIN

Specification: MIFAB® Series R1200-RS lacquered cast iron deep sump roof drain with 15" diameter anchor flange, 2" high cast iron external combined water dam and waterproofing membrane clamp ring, and internal dome strainer.

Function: Used in flat roofs to receive condensate and wastewater from air conditioners, cooling towers and other mechanical equipment. The 2" high external dam prevents storm water from entering the drain line and the internal dome strainer prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

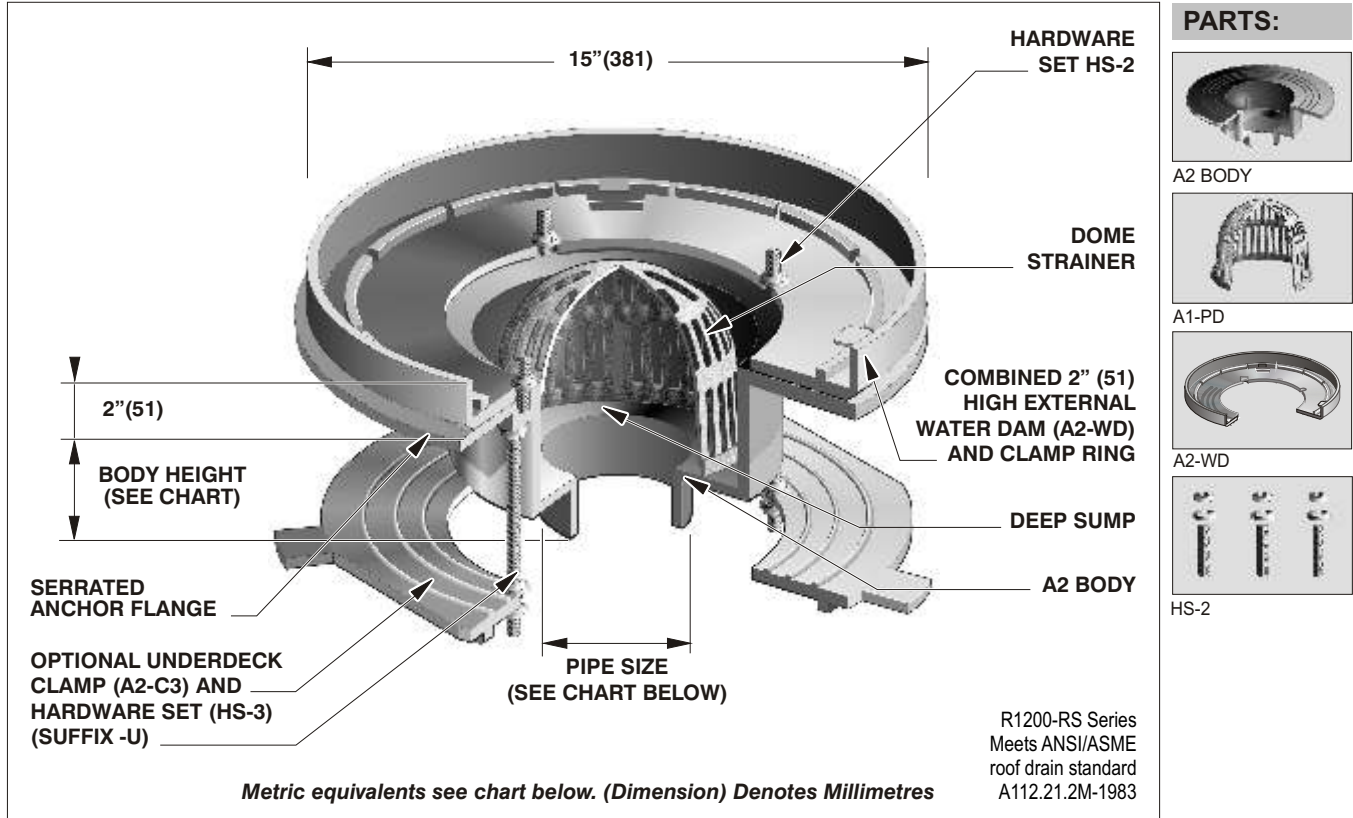


PARTS:



A2 BODY



A1-PD



A2-WD



HS-2

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	5 7/16" (138)	-	5 7/16" (138)	6 1/4" (159)	-
6" (152)	5 7/8" (149)	8" (203)	6" (152)	6 1/4" (159)	-
8" (203)	5 7/8" (149)	-	-	5 5/8" (143)	-

OPTIONAL VARIATIONS:

- Vandal proof -6
- Acid resistant epoxy coating -11
- Galvanized water dam -12
- All galvanized -13
- Bronze body -27
- Stainless steel body (Type 304) -28
- Stainless steel body (Type 316) -29
- PVC socket connection body -30
- ABS socket connection body -31
- Rough bronze dome -81
- Stainless steel mesh screen over dome -83
- Threaded side outlet (2",3",4") -90

- No Hub side outlet (cast iron only) (2",3",4") -90NH (Standard)
- No hub outlet (Standard) -B
- Sump receiver -BDP
- Q-deck bolt on sump receiver -BDP
- Secondary clamp -C
- Adjustable extension -E
- Stainless steel perforated Ballast guard -G
- Adj. ballast guard with secondary clamp -HC
- S.S. ballast guard with secondary clamp -JC

SUFFIX

- Push on outlet P
- Threaded outlet T
- Underdeck clamp -U
- Underdeck clamp with cutaway side -U3
- Fixed extension, 2",3",4" -V
- Water proofing flange -W-1
- Inside caulk outlet X
- Vertical expansion joint (see R1900) -XJ
- Extended wide elastomeric flange -Z

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.