




R1200-Z

LARGE SUMP DEXOTEX ROOF DRAIN
WITH WIDE DECK FLANGE FOR A LIQUID MEMBRANE ROOF

Specification: MIFAB® Series R1200-Z lacquered cast iron deep sump roof drain with 20" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: Used in flat roofs and decks designed for promenade or recreational areas where traffic bearing roof deck covering is used. Large free area dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

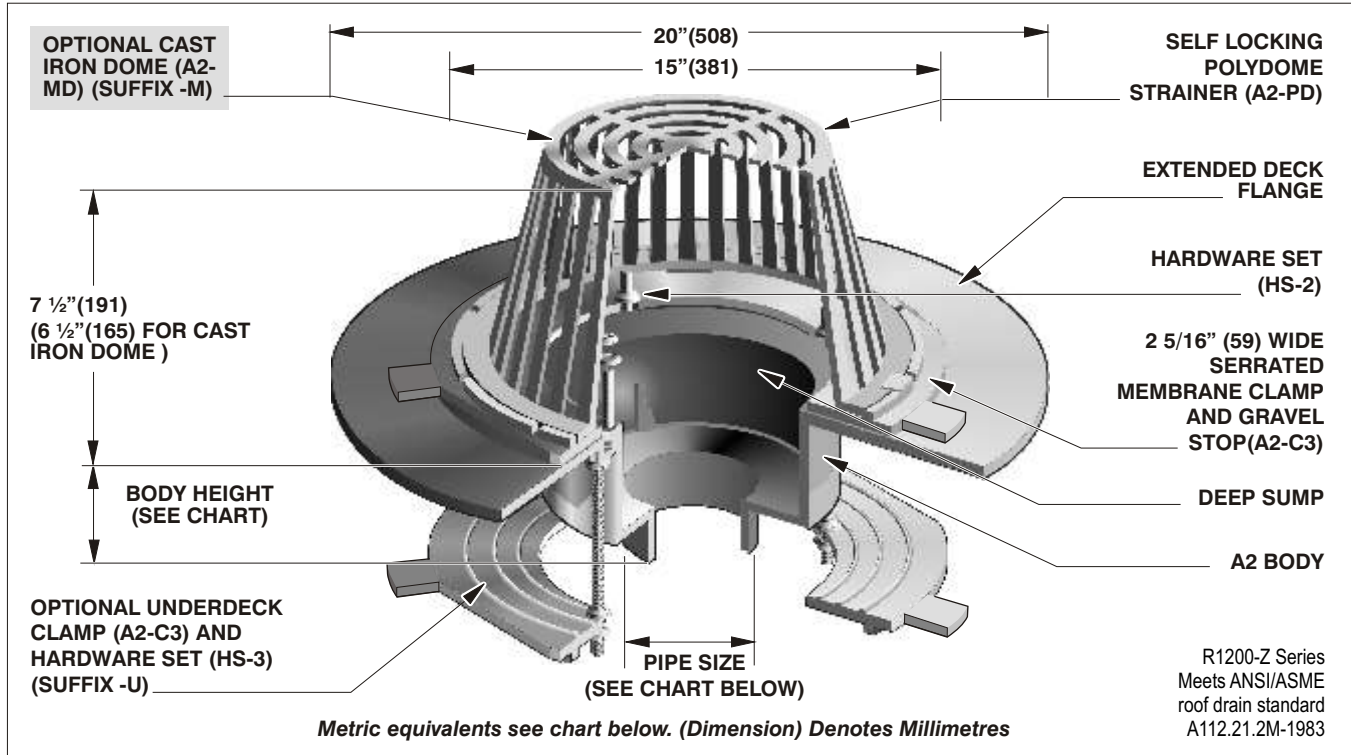

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	5 7/16" (138)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	5 7/16" (138)	-	5 7/16" (138)	6 1/4" (159)	-
6" (152)	5 7/8" (149)	8" (203)	6" (152)	6 1/4" (159)	-
8" (203)	5 7/8" (149)	-	-	5 5/8" (143)	-

OPTIONAL VARIATIONS:	SUFFIX	SUFFIX	SUFFIX
<input type="checkbox"/> Sediment bucket	-5	<input type="checkbox"/> Threaded side outlet (2",3",4")	-90
<input type="checkbox"/> Vandal proof dome	-6	<input type="checkbox"/> No Hub side outlet (cast iron only) (2",3",4")	-90NH
<input type="checkbox"/> Acid resistant epoxy coating	-11	<input type="checkbox"/> No hub outlet (Standard)	(Standard)
<input type="checkbox"/> Galvanized metal dome	-12	<input type="checkbox"/> Sump receiver	-B
<input type="checkbox"/> All galvanized	-13	<input type="checkbox"/> Secondary clamp	-C
<input type="checkbox"/> Flat grate (replaces dome Strainer)	-14	<input type="checkbox"/> Adjustable extension	-E
<input type="checkbox"/> Bronze body	-27	<input type="checkbox"/> Accuflow (parabolic weir) specify	-F1, -F2, -F3
<input type="checkbox"/> Stainless steel body (Type 304)	-28	<input type="checkbox"/> Stainless steel perforated Ballast guard	-G
<input type="checkbox"/> Stainless steel body (Type 316)	-29	<input type="checkbox"/> Adj. ballast guard with secondary clamp	-HC
<input type="checkbox"/> PVC socket connection body	-30	<input type="checkbox"/> S.S. ballast guard with secondary clamp	-JC
<input type="checkbox"/> ABS socket connection body	-31	<input type="checkbox"/> Cast iron dome	-M
<input type="checkbox"/> Rough bronze dome	-81	<input type="checkbox"/> Low profile aluminum dome	-M-80
<input type="checkbox"/> Stainless steel mesh screen over dome	-83	<input type="checkbox"/> Push on outlet	P
		<input type="checkbox"/> 2" external water dam	-R
		<input type="checkbox"/> Threaded outlet	T
		<input type="checkbox"/> Underdeck clamp	-U
		<input type="checkbox"/> Underdeck clamp with cutaway side	-U3
		<input type="checkbox"/> Fixed extension, 2",3",4"	-V
		<input type="checkbox"/> Adjustable water dam (4" dia.)	-W
		<input type="checkbox"/> Water proofing flange	-W-1
		<input type="checkbox"/> 6" diameter adjustable water dam	-W6
		<input type="checkbox"/> Inside caulk outlet	X
		<input type="checkbox"/> Vertical expansion joint (see R1900)	-XJ
		<input type="checkbox"/> Extended wide deck flange	-Z

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____