

Location: \_\_\_\_\_



**CV**

**BRONZE SILENT CHECK VALVE  
THREADED AND SWEAT CONNECTIONS**



**Specification:** The Beeco® Silent Check Valve is designed to reduce water hammer while performing all the same requirements of a swing check valve. The Sweat Version is designed to solder into lines without disassembly; a low temperature solder should be used in order to eliminate damage to the seating surface.

**Ratings:** Maximum Working Pressure 400 psi (27.6 bars); Temperature Rating -20° to 100° F (-29° C to 38° C). Maximum temperature rating is 400° F.

**Features:** Due to its poppet design, the Beeco Silent Check Valve can be installed in either the horizontal or vertical position. Its silent operation and low pressure drop make it superior to most swing check valves. Comes in both IPS and SWEAT connections.

**LEAD FREE**

The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

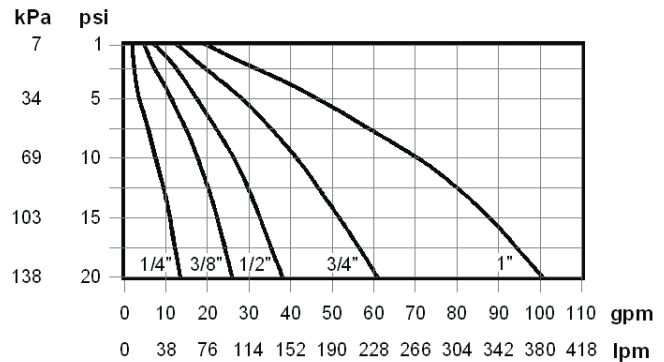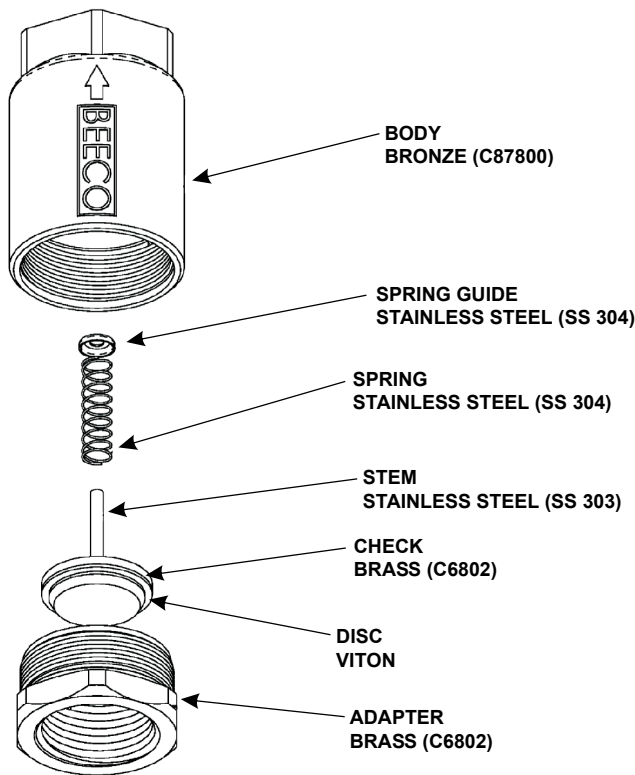

Model No.	Size
CV.25-IPS-LL	1/4"
CV.375-IPS-LL	3/8"
CV.50-IPS-LL	1/2"
CV.75-IPS-LL	3/4"
CV1.00-IPS-LL	1"
CV.50-SWT-LL	1/2"
CV.75-SWT-LL	3/4"
CV1.00-SWT-LL	1"

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_