

Location:




F1210TC

FLOOR DRAIN FOR MEMBRANE FLOOR AREAS

Specification: MIFAB Series F1210TC lacquered cast iron floor drain with anchor flange, cast iron clamp ring with weepholes for waterproofing membrane, and polished chrome plated strainer.

Function: Used in showers, kitchens, restrooms and other membrane finished areas. Round, adjustable strainer is used with all types of poured finished floors. Membrane clamp is provided to secure the waterproofing membrane.

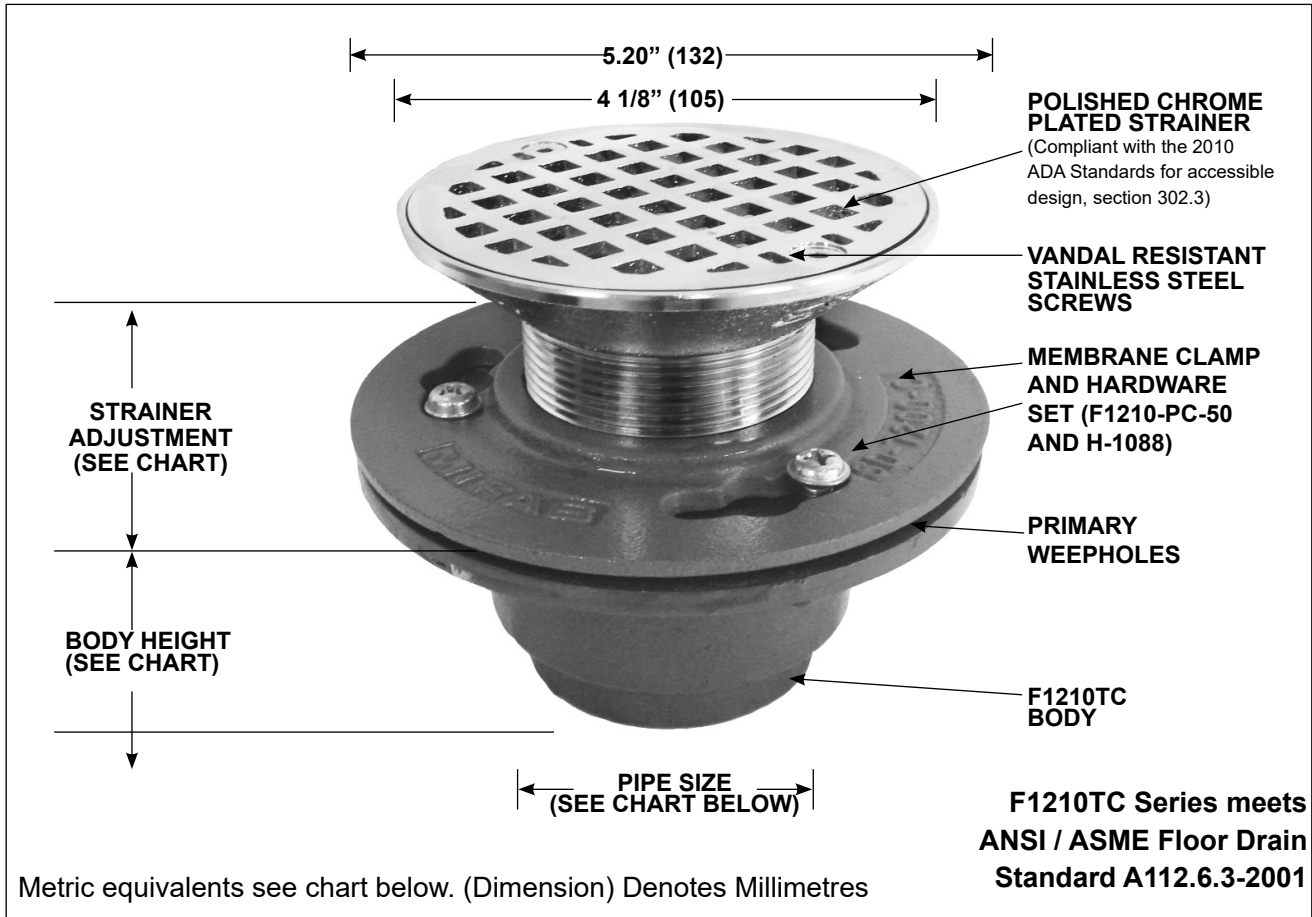

STRAINER DIAMETER	PIPE SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT THREADED (T)
		MIN	MAX	FREE AREA	LOAD RATING		
4 1/8" (105)	2" (51)	1 1/4" (32)	2 3/8" (60)	5in ² (3226 ²)	UP TO 2,000 LBS.	2" (51)	2 5/16" (59)

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	OPTIONAL VARIATIONS:
-6	Security screws (T-20 Torx & pin)	-F4	4" Round funnel
-11	Acid resistant epoxy coated body	-F6	6" Round funnel
-13	Galvanized body	-G	Oval 4" x 9" funnel
-15	Extension	-J	6" x 3" x 1" funnel
-49	Chrome Plated Strainer	-PA	Pennsylvania Steel Act compliant product
-BA	Buy American Act compliant product		

Job Name: <input type="text"/>	Page No: <input type="text"/>
Section No: <input type="text"/>	Contract: <input type="text"/>
Schedule No: <input type="text"/>	Purchase Order No: <input type="text"/>