Location:




FLOOR DRAIN WITH 12" SQUARE ADJUSTABLE TRACTOR GRATE

Specification: MIFAB[®] Series F1440 lacquered cast iron deep sump floor drain with anchor flange, weepholes, and adjustable collar with standard 1" (25) thick, 12" (305) hinged square, (specify material finish) tractor grate.

F1440

Function: Used in warehouses, mechanical rooms, parking garages and other non-membrane finished areas. 12" square, adjustable tractor grate is used with all types of poured finished floors.

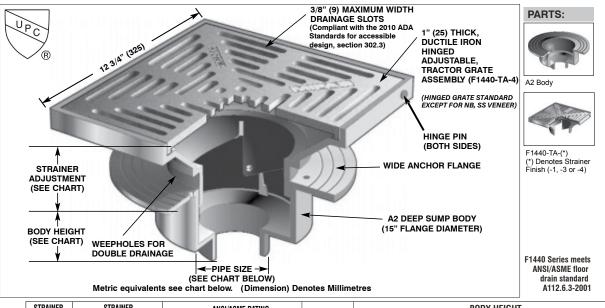

STRAINER	STRAINER	ANSI/ASME RATING		PIPE		BODY HEIGHT				
DIAMETER	ADJUSTMENT Min Max	FREE	LOAD RATING	SIZE		NO HUB (Standard)	PUSH ON (P)	THREADED	INSIDE Caulk (X)	PVC/ABS
		AREA	N.B. (-1) / S.S. (-3) / D.I. (-4)			UN (F)	(1)	UNULK (A)	(-30)/(-31)	
	2 1/4" (57) 4 1/8" (105)	51 in²	ANSI/ASME	2"	(51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
(305 x 305)		(32,903²)	LOAD CLASS	3"	(76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
			4"	(102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)	
			(OVER 10,000 LBS.)	5"	(127)	6" (152)	_	5 7/16" (138)	6 1/4" (159)	_
				6"	(152)	7 1/4" (184)	7" (178)	7" (178)	6 1/4" (159)	—

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-1	Nickel bronze (veneer)	-41	Sump receiver
-3	Stainless steel (veneer)	-50	Lacquered cast iron funnel
-4	Ductile iron strainer	-90	Threaded side outlet (2", 3", 4")
-5	Sediment bucket	-90NH	No hub side outlet (2", 3", 4")
-6	Security screws (T-20 Torx & pin)	-95	Client logo
-7	1/2" trap seal primer connection	-BA	Buy American Act compliant product
-8	Backwater valve (2", 3", 4")	-C	Membrane clamp
-11	Acid resistant epoxy coated body	-F4	4" Round funnel
-12	Galvanized top assembly	-F6	6" Round funnel
-13	Galvanized body	-G	Oval 4" x 9" funnel
-15	Extension	-HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
-20	Secondary dome strainer	-J	6" x 3" x 1" funnel
-21	Secondary flat stainless steel strainer (2", 3", 4")	(Standard)	No hub outlet
-24	Solid secured cover	-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-28	Stainless steel body (Type 304)	Р	Push on Outlet
-30	PVC socket connection body	-PA	Pennsylvania Steel Act compliant product
-31	ABS socket connection body	Т	Threaded outlet (2",3",4")
-32	2", 3", 4" integral deep seal trap	Х	Inside caulk outlet
-34	Closure plug	-Y	Non-adjustable top
-35	Stainless steel mesh over bucket	-Z	Extended wide elastomeric flange
-40	Underdeck clamp		-

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

Page F74

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880