

Location: \_\_\_\_\_




**F1530**

**FLOOR DRAIN WITH 16" SQUARE HEAVY DUTY TRACTOR GRATE AND DEEP SUMP**

**Specification:** MIFAB® Series F1530 lacquered cast iron floor drain with anchor flange, weepholes, 16" (406") diameter fixed, heavy duty membrane collar with weepholes, and standard 1" (25) thick, 9" (229) round, ductile iron tractor grate.

**Function:** Used in parking garages with precast construction where core drilling or the boxing out of the drain is required. 9" round tractor grate is used with all types of poured finished floors. The wide reinforced anchor flange provides maximum support for drain.

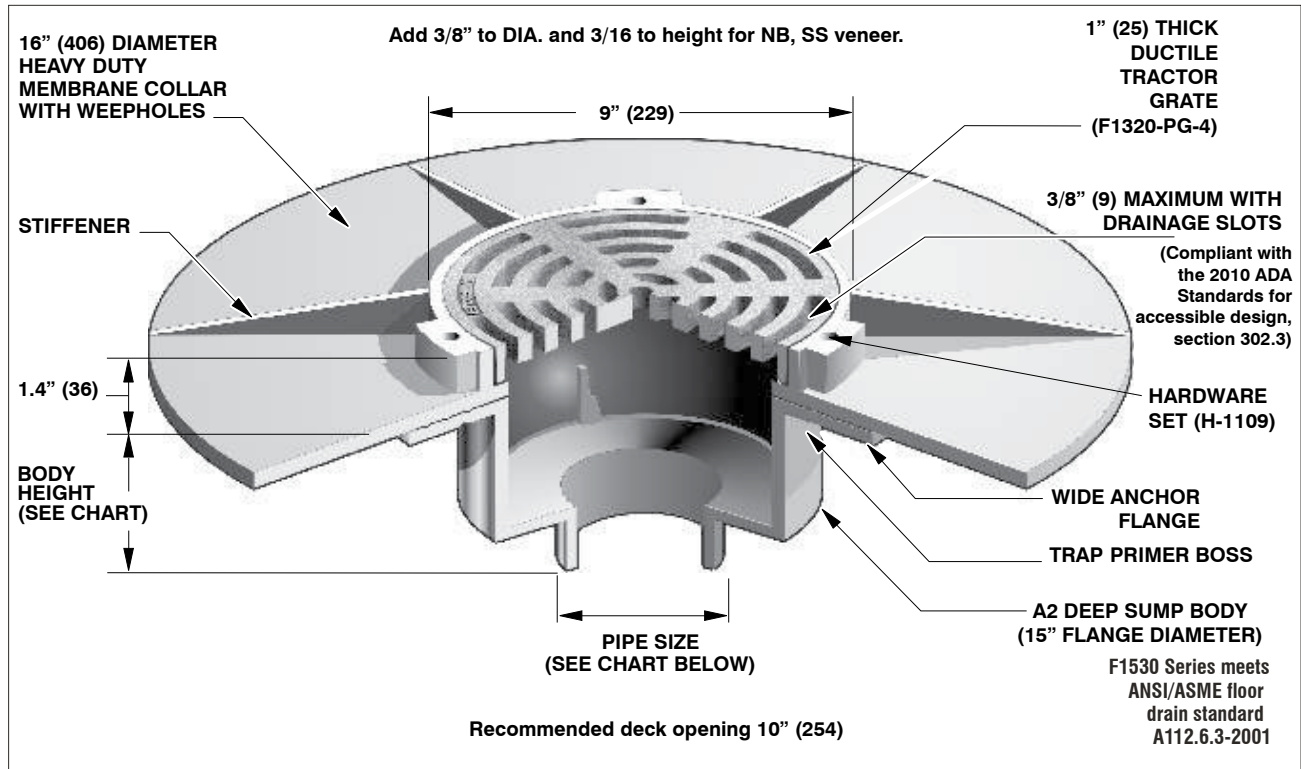

| STRAINER DIAMETER | ANSI/ASME RATING                             |   | PIPE SIZE | BODY HEIGHT       |              |               |                  |                     |
|-------------------|--|---|-----------|-------------------|--------------|---------------|------------------|---------------------|
|                   | FREE AREA                                    | LOAD RATING   |           | NO HUB (STANDARD) | PUSH ON (P)  | THREADED (T)  | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| 9" (229)          | 18 in <sup>2</sup><br>(11,613 <sup>2</sup> ) | ANSI/ASME<br>LOAD CLASS<br>"SPECIAL DUTY"<br>(OVER 10,000 LBS.) | 2" (51)   | 6" (152)          | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159)     | 7 1/8" (181)        |
|                   |  |   | 3" (76)   | 6" (152)          | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159)     | 7 3/8" (187)        |
|                   |  |   | 4" (102)  | 6" (152)          | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159)     | 7 3/8" (187)        |
|                   |  |   | 5" (127)  | 6" (152)          | —            | 5 7/16" (138) | 6 1/4" (159)     | —                   |
|                   |  |   | 6" (152)  | 7 1/4" (184)      | 7" (178)     | 7" (178)      | 6 1/4" (159)     | —                   |

**SUFFIX      OPTIONAL VARIATIONS**

- 1 Nickel bronze strainer (vener)
- 3 Stainless steel strainer (vener)
- 4 Ductile iron strainer
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 12 Galvanized top assembly
- 13 Galvanized body
- 20 Secondary dome strainer
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body and grate (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body

**SUFFIX      OPTIONAL VARIATIONS**

- 34 Closure plug
- 35 Stainless steel mesh over bucket
- 40 Underdeck clamp
- 41 Sump receiver
- 90 Threaded side outlet (2", 3", 4")
- 90NH No hub side outlet (2", 3", 4")
- BA Buy American Act compliant product
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- (Standard) No hub outlet
- MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_

Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_