

Location: _____





MHY-15

**LOW LEAD NON FREEZE
WALL HYDRANT**

Speci cation: MIFAB® Series MHY-15 _____ (specify length) A.S.S.E. 1019-B and 1053 certified exposed type, self draining, low lead, non freeze wall hydrant with A.S.S.E. 1011 approved anti-siphon and vandal resistant integral vacuum breaker with 3/4" (19) male hose connection. Hydrant assembly complete with quarter-turn ceramic cartridge assembly to control both the flow and drain functions, hardened bronze operating stem, drain port under the hexagon nut, heavy duty brass casing, 360 degree swivel inlet connection, heavy duty chrome plated bronze head casting and polished chrome plated face plate. Operating key to be furnished with each hydrant.

Function: Designed to blend in with commercial applications such as office buildings, apartment complexes, malls and shopping centers, schools, churches and industrial buildings.

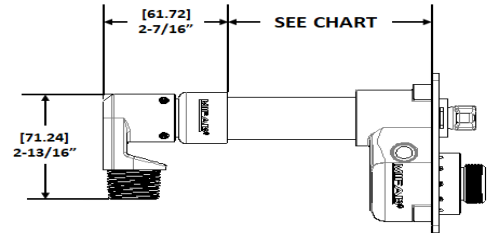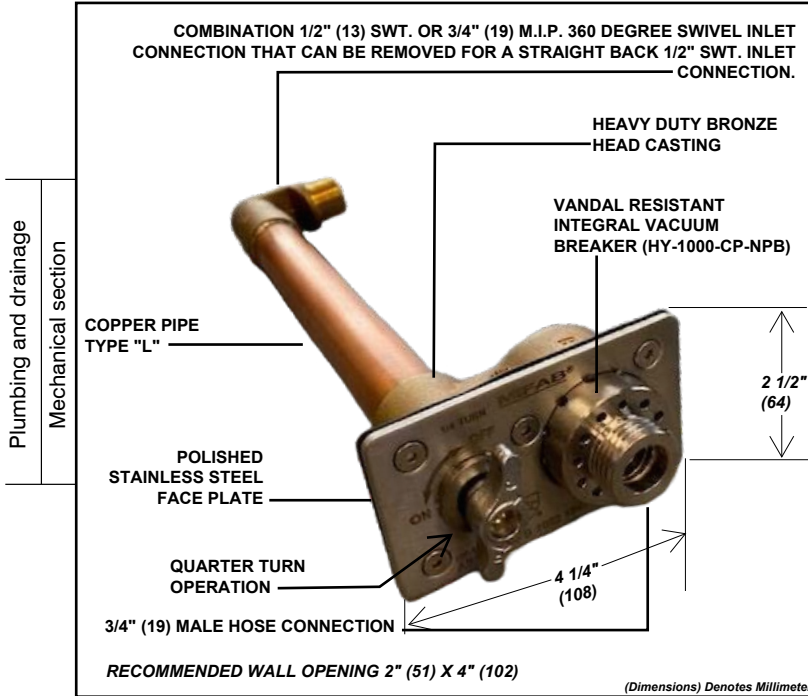

MHY-15 SERIES FEATURES:

- **SWIVEL CONNECTION** - 360 degree combination 1/2" SWT. and 3/4" male threaded inlet connection. Swivel connection can be removed for 1/2" straight back inlet connection.
- **VACUUM BREAKER** - unique self draining vandal resistant integral vacuum breaker protects from anti-siphon conditions.
- **FACE PLATE** - polished stainless steel.
- **CASING** - Heavy duty bronze casing.
- **APPROVALS** - MHY-15 Series wall hydrant is tested and certified by the A.S.S.E. Standards 1019-B, 1053 and listed by I.A.P.M.O. The anti-siphon vacuum breaker is tested and certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.



The wetted surface contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

| MODEL NO. | WALL THICKNESS | | OVER LENGTH | | APPROXIMATE WEIGHT | | SWIVEL INLET CONNECTION |
|-----------|----------------|-----|-------------|-----|--------------------|------|--------------------------------------|
| | IN | MM | IN | MM | Lbs. | Kgs. | IN |
| MHY-15-4 | 4 | 102 | 8 | 203 | 4.3 | 1.95 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-6 | 6 | 152 | 10 | 254 | 4.7 | 2.13 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-8 | 8 | 203 | 12 | 306 | 5.0 | 2.27 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-10 | 10 | 254 | 14 | 357 | 5.3 | 2.41 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-12 | 12 | 305 | 16 | 406 | 5.7 | 2.59 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-14 | 14 | 356 | 18 | 457 | 6.0 | 2.72 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-16 | 16 | 406 | 20 | 508 | 6.5 | 2.95 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-18 | 18 | 457 | 22 | 559 | 7.0 | 3.18 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-20 | 20 | 508 | 24 | 610 | 7.3 | 3.31 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-22 | 22 | 559 | 26 | 660 | 7.7 | 3.50 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-24 | 24 | 610 | 28 | 711 | 8.0 | 3.63 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-26 | 26 | 680 | 30 | 762 | 8.3 | 3.77 | 1/2" SWT., 3/4" Male IPS combination |
| MHY-15-30 | 30 | 762 | 34 | 864 | 9.0 | 4.09 | 1/2" SWT., 3/4" Male IPS combination |

SUFFIX OPTIONAL VARIATIONS

- 0 1" (25) Hose connection
- BA Minimum 51% material cost made in the USA
- DVB Chrome Plated Double Check Vacuum Breaker (MHY-9006-CP)

SUFFIX OPTIONAL VARIATIONS

- PA Pennsylvania Steel Act compliant product
- WC Wall clamp

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____