

Location: _____




MI-LINT

LINT INTERCEPTOR

Specification: MIFAB® Series MI-LINT sanitary powder epoxy coated inside and outside fabricated 10 gauge steel lint interceptor with flow rate of _____ (indicate). Unit shall include: (1/2" (13) thick removable primary straining baffle with 3/8" (9) holes and secondary 1/2" (13) thick removable straining baffle with 3/8" (9) holes, removable cross bar, securing bolt(s), stainless steel calibrated orifice plate, and steel powder epoxy coated non skid rectangular gasketed lid(s).

Function: Used in commercial laundry facilities to receive wastewater with lint and sediment through the side inlet. The primary straining and removable secondary straining baffle are designed to capture debris and prevent drain line clogging. Electrostatically applied powder epoxy coating ensures extra long life.

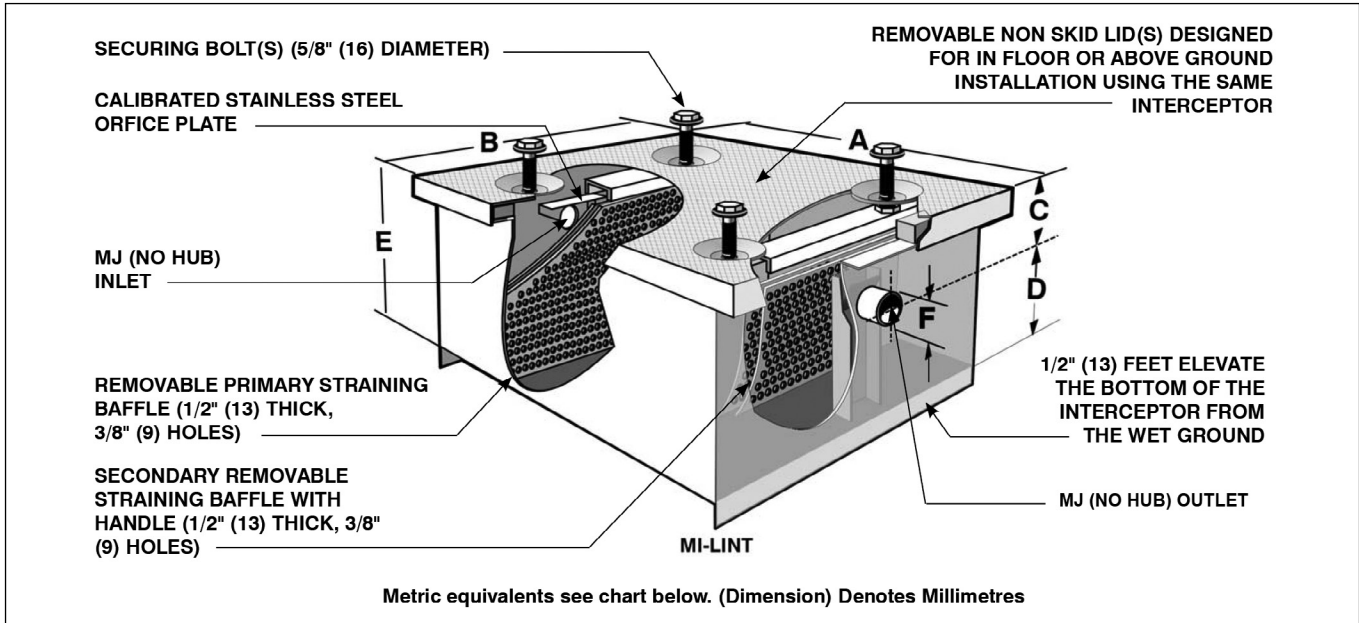

MODEL NO.	US GPM	A	B	C	D	E	F	NO. OF LIDS	NO. OF BOLTS	LIQUID HOLDING CAP. (U.S.G.)
MI-LINT-1	34	29.5" (736)	20" (500)	3" (75)	17" (425)	20" (500)	2" (50)	1	4	34.29
MI-LINT-2	40	29.5" (737)	20.5" (513)	4" (100)	20" (500)	24" (600)	3" (75)	1	4	40.74
MI-LINT-3	80	33.5" (838)	26" (650)	4" (100)	26" (650)	30" (750)	3" (75)	2	4	80.18
MI-LINT-4	111	37.5" (938)	30" (750)	4" (100)	28" (700)	32" (800)	4" (100)	2	8	114.03
MI-LINT-5	155	55.5" (1388)	26" (650)	6" (150)	30" (750)	36" (900)	4" (100)	2	8	155.64
MI-LINT-6	213	67.5" (1688)	28" (700)	8" (200)	32" (800)	40" (1000)	6" (150)	3	12	213.80
MI-LINT-7	302	67.5" (1688)	28" (700)	10" (250)	44" (1100)	54" (1350)	6" (150)	3	12	302.26
MI-LINT-8	405	67.5" (1688)	30" (750)	12" (300)	54" (1350)	66" (1650)	6" (150)	3	12	404.91
MI-LINT-9	506	67.5" (1688)	40" (1000)	10" (250)	50" (1250)	60" (1500)	6" (150)	3	12	506.42
MI-LINT-10	750	91.5" (2288)	40" (1000)	8" (200)	54" (1350)	62" (1550)	6" (150)	4	16	868.65
MI-LINT-11	1017	98" (2450)	50" (1250)	12" (300)	54" (1350)	66" (1650)	6" (150)	4	16	1017.35
MI-LINT-12	1536	98" (2450)	50" (1250)	12" (300)	80" (2000)	92" (2300)	6" (150)	4	16	1536.00

Note: The "C" dimension detailed above is from either the middle of the inlet or the outlet to the top the interceptor. The inlet and outlet dimensions are always the same.

Suffix	Description
-AL	Aluminum lid(s)
-AP	Anode pack
-BA	Buy American Act compliant product
-C	Extension "C" as required
-CDF	Close down filter
-FL	Anchor flange
-FLC	Flow control fitting
-FLM	Anchor flange and membrane clamp

-HD	Heavy Duty load rated lids
-HLA	High level alarm
-RSSB	Replacement stainless steel baffle
-SB	Sediment bucket
-SS	Stainless steel cover shroud
-T	F.I.P. female threaded inlet and outlet
-TL	Lid (s) to receive tile or terrazzo
-VC	2" vent connection
specify	Special size inlet and outlet

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____