

Location: \_\_\_\_\_




**MI-300-BP**

**ELECTRONIC TRAP SEAL PRIMER WITH AIR GAP, DISTRIBUTION UNIT AND BATTERY PACK**

**Specification:** The MI-300-BP is manufactured with a stainless steel solenoid valve, air gap, copper manifold and battery pack controller that will last approximately one year. The water discharge frequency can be adjusted to meet the building's needs. The MI-300-BP can be located anywhere in the water supply. A manifold is connected to the bottom of the MI-300-BP to serve up to 5 drains. The MI-300-BP is practical for infrequently used buildings such as those that do not have access to power. The MI-300-BP is manufactured in accordance with ANSI/ASME A112.1.2 air gap in plumbing systems Standard. UA 18x18 access door is suggested for access to the MI-300-BP when installed in the wall.

**Function:** The MI-300-BP is ideal for facilities in remote areas that do not have access to power. The battery pack included with the MI-300-BP provides the necessary power to operate. The water discharge frequency can be adjusted to meet the building's needs. It can be located anywhere in the water supply. The MI-300-BP is manufactured in accordance to the ANSI/ASME A112.1.2 air gap in plumbing systems Standard. The -ENC 12" X 12" enclosure is suggested when the MI-300-BP is installed into the wall. The life of the battery pack is six months.

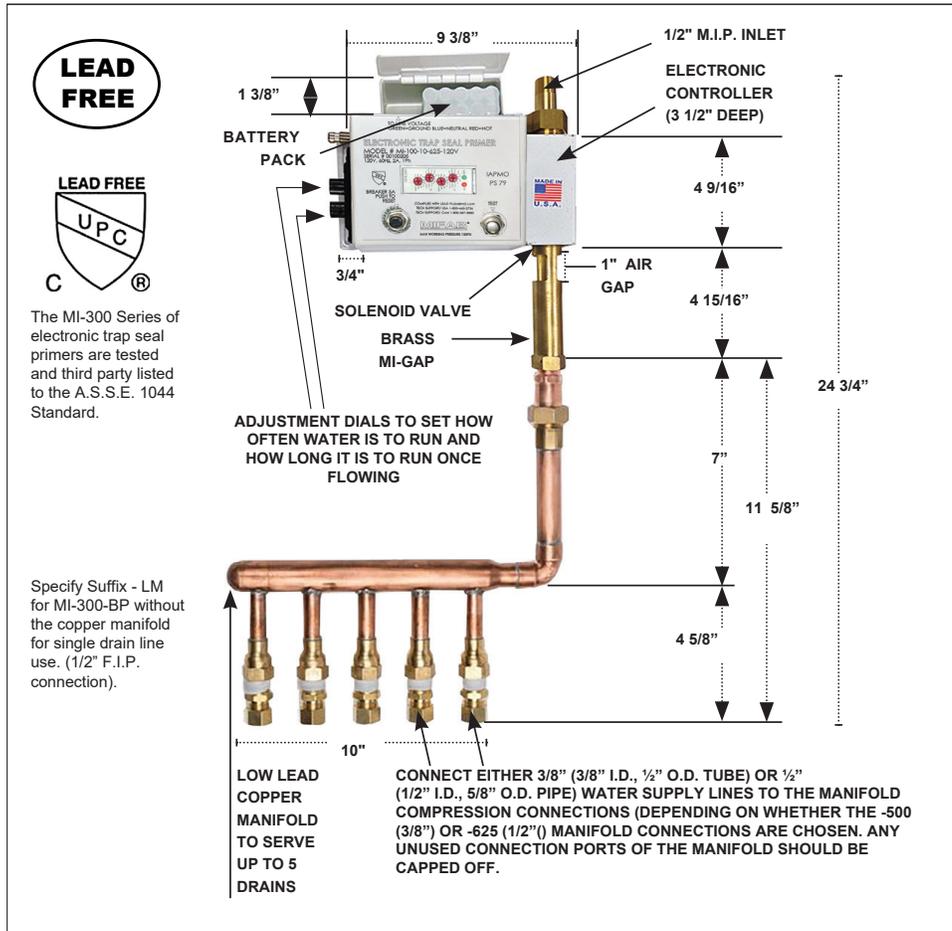

MODEL NO.	DESCRIPTION	SHIPPING WT.
MI-300-BP-500	connections for 1/2" piping	8 lbs.
MI-300-BP-625	connections for 5/8" piping	8 lbs.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_

## MI-300-BP ADDITIONAL VARIATIONS

SUFFIX	DESCRIPTION
<b>-3P</b>	120VAC 3 Prong plug
<b>-A</b>	Allen key lock for access door (door is separate)
<b>-AD</b>	Cabinet Cover (bolted to cabinet frame and non hinged) (16 gauge powder epoxy coated steel white)
<b>-ADSS</b>	Stainless Steel (Type 304) Cabinet Cover (bolted to cabinet frame and non hinged) (16 gauge fabricated stainless steel (Type 304)
<b>-BA</b>	Buy American Act compliant product
<b>-BP</b>	Battery Pack
<b>-C</b>	Cylinder key lock for access door (door is separate)
<b>-DW</b>	Drywall bead frame for access door (5" cabinet depth) (door is separate)
<b>-ENC</b>	Steel Cabinet to enclose MI-200 / MI-300 (16 gauge powder epoxy coated steel (white) cabinet
<b>-ENCSS</b>	Stainless Steel (Type 304) Cabinet to enclose MI-200 / MI-300 (16 gauge fabricated stainless steel (Type 304)
<b>-MFRU</b>	Uninsulated fire rated access door, flush mount (6" minimum overall depth) (door is separate)
<b>-PL</b>	Paddle latch for access door (door is separate)
<b>-SS</b>	Stainless Steel (Type 304) Cabinet (16 gauge fabricated stainless steel (Type 304) ( <i>MI-100, MI-100-DR</i> )
<b>-UA</b>	Access door, prime coated (5" minimum overall depth)
<b>-UASS</b>	Access door, stainless steel (5" minimum overall depth)
<b>-24VAC</b>	24VAC
<b>-24VDC</b>	24VDC
<b>-75WS</b>	3/4" water supply connection
<b>-120VAC</b>	120VAC
<b>-220VAC</b>	220VAC
<b>-500</b>	1/2" compression connection ports
<b>-625</b>	5/8" compression connection ports