

Location: _____




POG-SW

SERVICE WEIGHT GASKETS

Specification: The MIFAB® POG-SW Series of service weight gaskets is tested and certified to ASTM Standard # C564. All models are listed with IAPMO. Gaskets are made from neoprene. Their hardness (durometer) is 55, +/- 5.

Function: The MIFAB POG Series is a one piece compression gasket. They are used to join hub and spigot cast iron soil pipe and fittings manufactured to the ASTM A 74 Standard.

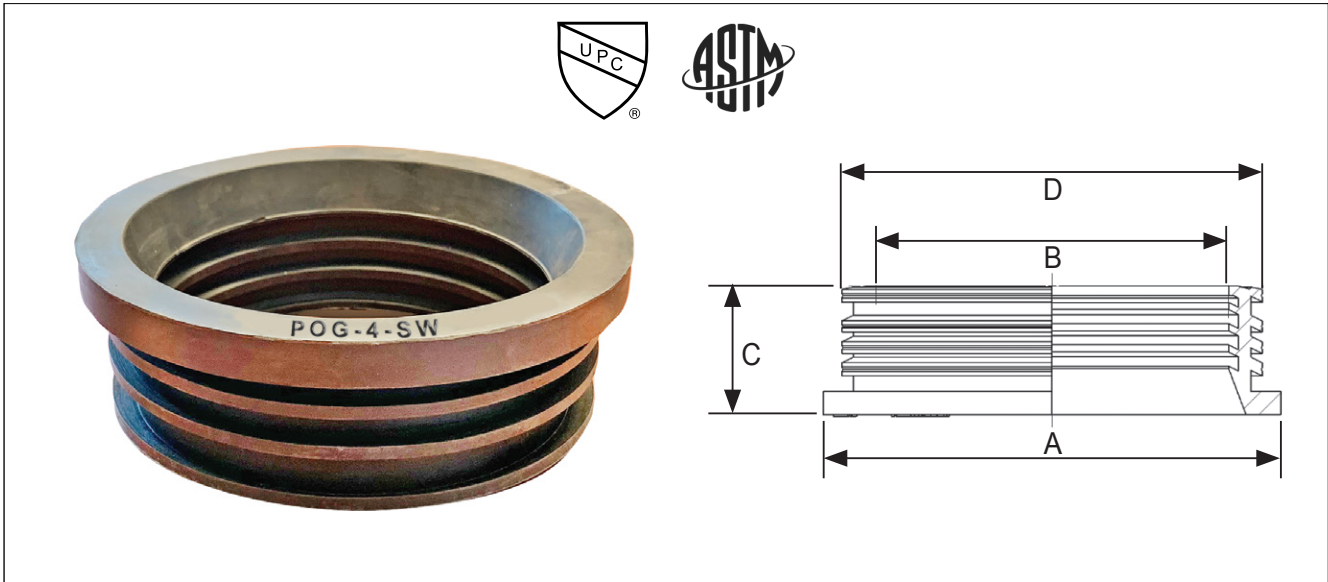

MODEL NUMBER	PIPE SIZE	A	B	C	D
POG-2-SW	2"	3.54"	2.01"	1.85"	3.08"
POG-3-SW	3"	4.61"	3.07"	1.85"	4.41"
POG-32-SW	3" x 2"	4.61"	2.01"	1.85"	3.08"
POG-4-SW	4"	5.55"	4.13"	1.91"	5.13"
POG-43-SW	4" x 3"	5.55"	3.07"	1.91"	4.41"
POG-5-SW	5"	6.55"	5.13"	1.91"	6.13"
POG-6-SW	6"	7.76"	5.98"	2.18"	7.13"
POG-8-SW	8"	10.17"	8.06"	2.68"	9.61"
POG-10-SW	10"	12.29"	10.18"	2.68"	11.73"
POG-12-SW	12"	14.29"	12.18"	3.43"	13.73"
POG-15-SW	15"	17.73"	15.63"	3.43"	17.18"

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880