

Location: _____



STR-PC



DUCTILE IRON STRAINERS POWDER COATED

Specification: The Ductile Iron "Y" type strainer shall be in 125 Class and conform to ANSI B16.1, and both the body and access cover shall be made of Ductile Iron A536 65-45 12. The valve shall be supplied with a drain/blow-off connection with a ductile iron closure plug and will have an FDA approved epoxy coating inside and out. The integral strainer screen shall be accessible for cleaning without removing the device from the line.


Ratings: Working Working pressure PN16/Class 125. Temperatures to 270° F (120° C).

Materials:

- Body: Ductile Iron A536 65-45 12
- Cover: Ductile Iron A536 65-45 12
- Gasket: Teflon/Graphite
- Standard Screen: 304 Stainless Steel
- Hole Size 1/16" up to 3" strainer and 1/8" on 4" and over

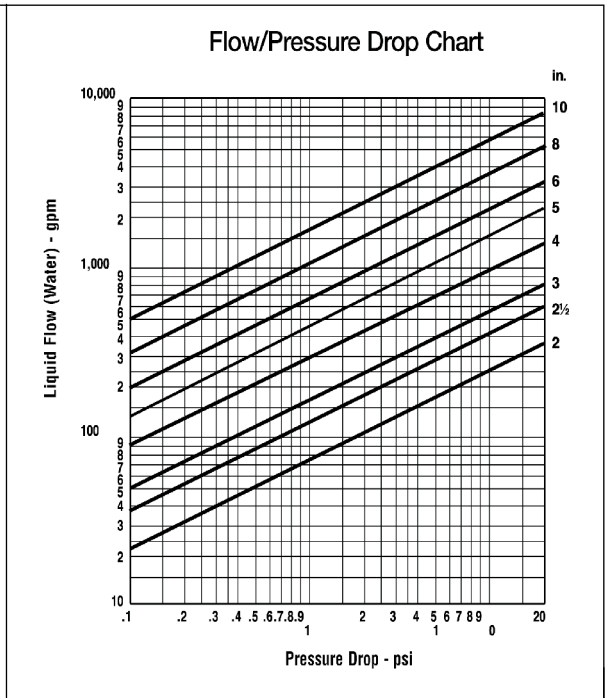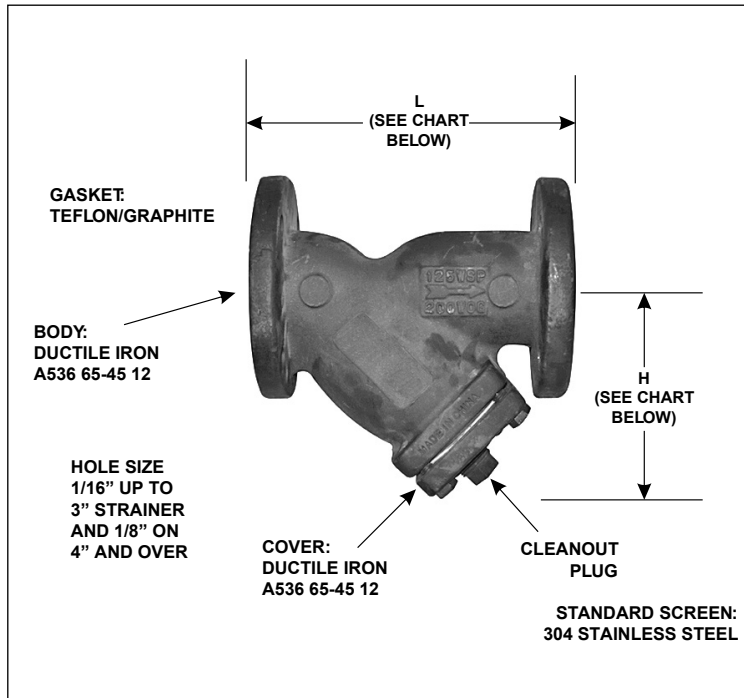

MODEL NO.	SIZE	L	H	PLUG
STR2.00-IRON-FLG-PC	2"	9 1/16"	5 3/4"	1/2"
STR2.50-IRON-FLG-PC	2 1/2"	11 5/8"	6 7/8"	1"
STR3.00-IRON-FLG-PC	3"	11 5/8"	7 3/4"	1"
STR4.00-IRON-FLG-PC	4"	13 7/8"	9 1/8"	1"
STR6.00-IRON-FLG-PC	6"	18 1/2"	12"	1 1/2"
STR8.00-IRON-FLG-PC	8"	21 3/8"	15 3/4"	1 1/2"
STR10.00-IRON-FLG-PC	10"	18 5/8"	18 5/8"	2"

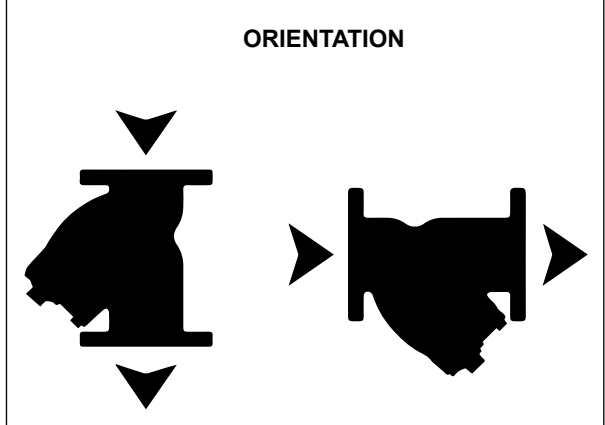

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____