

Location: \_\_\_\_\_





# XL-MI-G-PL-1150

## LARGE CAPACITY PLASTIC GREASE INTERCEPTOR

**Specification:** MIFAB® XL-MI-G-PL-1150, 100 GPM grease interceptor with 1,150 lb. grease design capacity. Interceptor has a limited lifetime warranty and is made in the USA out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor designed for above or below ground installation. Interceptor includes a dual adjustable lid system, external, vented flow control fitting, sample port access, and multiple outlet options. Steel encased composite lid provides a water / gas tight seal and have a minimum of 20,000 lbs. load capacity. The lid is designed in accordance with the loading requirements of AASHTO H20. Interceptor shall be tested and certified to the P.D.I. Standard PDI-G101, CSA B481, A.S.M.E. A112.14.3 and listed with I.A.P.M.O. Big Max grease interceptors are also in compliance with International Plumbing Code (I.P.C.) / I.C.C. by I.A.P.M.O.

**Function:** Used in restaurants, kitchens, institutions, industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. Narrow width permits access through doorways and down stairwells. High Density Polyethylene construction ensures a lightweight installation process (two people can move and install it). All Big Max interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

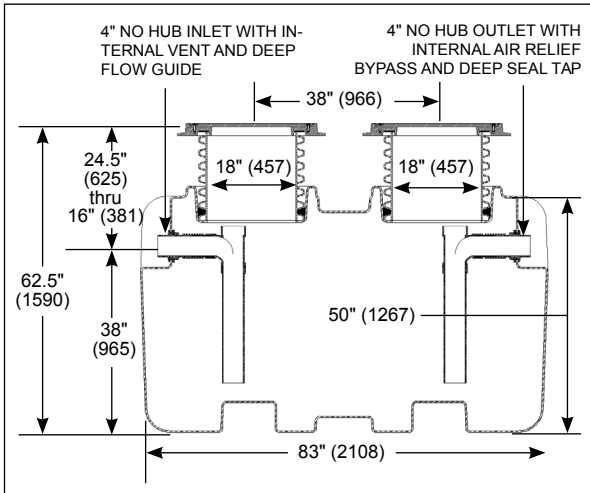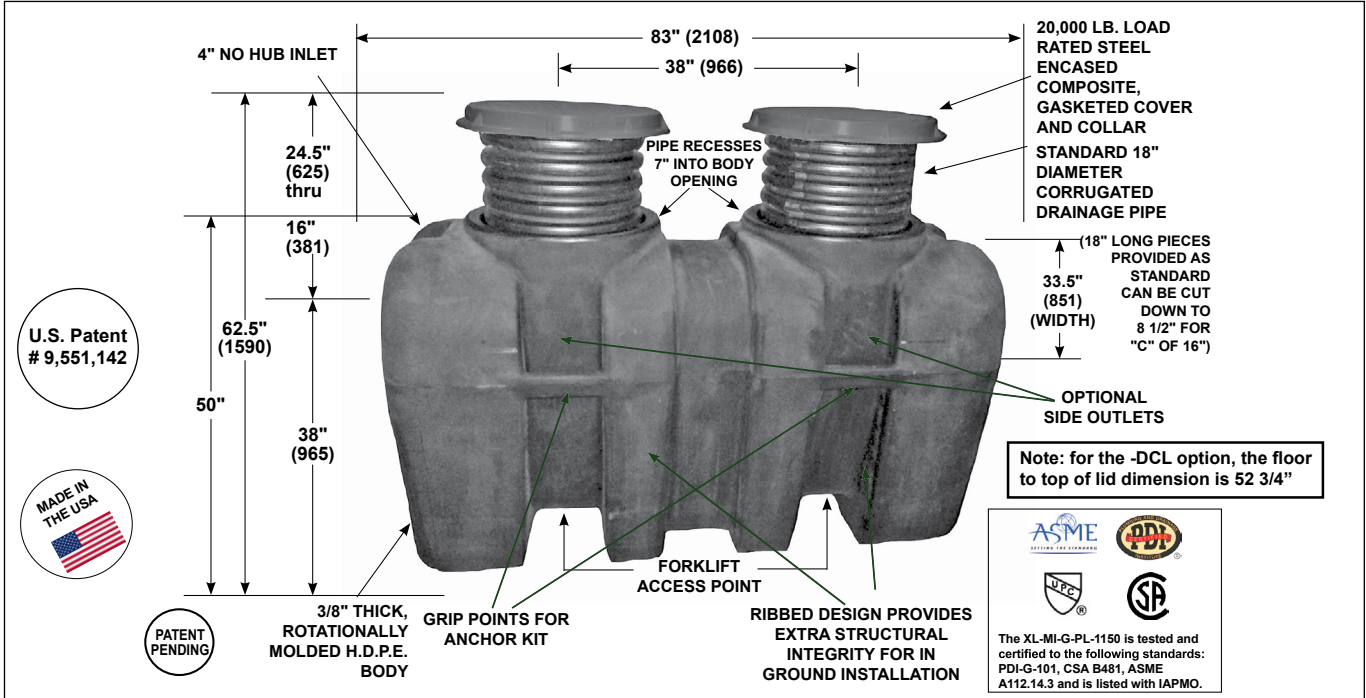

\*Note: The XL-MI-G-PL-1150 does not meet PDI standard if outfitted with an internal flow control (-OP suffix). The PDI standard is only valid for the external flow control fitting.

MODEL NO.	FLOW RATE (GPM)	GREASE DESIGN CAPACITY	LIQUID CAPACITY (GAL)	SHIPPING WEIGHT (Lbs.)
XL-MI-G-PL-1150	100	1,150Lbs. (160GAL)	300	275

- AK High water anchor kit (set of two)
- C Lid extension (specify "C" dimension required) (Max. of 72")
- CL Holddown brackets for lid (when installed above ground)
- DCL Direct Connect Lid (lid bolted to top of body)
- DI Ductile iron lid & collar
- DP Dosing pump
- EP Enzyme port
- FL-C Membrane clamp kit
- F6 6" No Hub Inlet / Outlet connection
- HLA High level alarm
- LHSI 4" no hub inlet on left hand side
- LHSO 4" no hub outlet on left hand side
- OP Internal flow control\*
- POK Pump Out Kit (suction pipe to go into -RPO bulkhead fitting and fitting with 3" cam connection to connect to outside hose)
- RHSI 4" no hub inlet on right hand side
- RHSO 4" no hub outlet on right hand side
- RPO Remote Pump Out (4" bulkhead fitting connection only)
- SB Sediment bucket
- SP External Sample Port (for existing construction. Inlet and Outlet on the same level)
- SP-OF External Sample Port (for new construction. Inlet higher than the outlet).
- T Female threaded connections

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_