



XL-MI-SAND-PL-300

LARGE CAPACITY PLASTIC SAND INTERCEPTOR

Specification: MIFAB® XL-MI-SAND-PL-300, sand interceptor with 300 gal. liquid holding capacity. Interceptor has a limited lifetime warranty and is made in the USA out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor designed for above or below ground installation. Interceptor includes a dual adjustable lid system and multiple outlet options. Steel encased composite lid provides a water / gas tight seal and have a minimum of 20,000 lbs. load capacity. The lid is designed in accordance with the loading requirements of AASHTO H20.

Function: Used in maintenance facilities to receive wastewater that contains sand and sediment. Sediment and sand is collected. Regular maintenance is required to keep the interceptor functioning. Interceptor may be installed on the ground, semi recessed, or flush with the floor. Narrow width permits access through doorways and down stairwells. High Density Polyethylene construction ensures a lightweight installation process (two people can move and install it). All Big Max interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

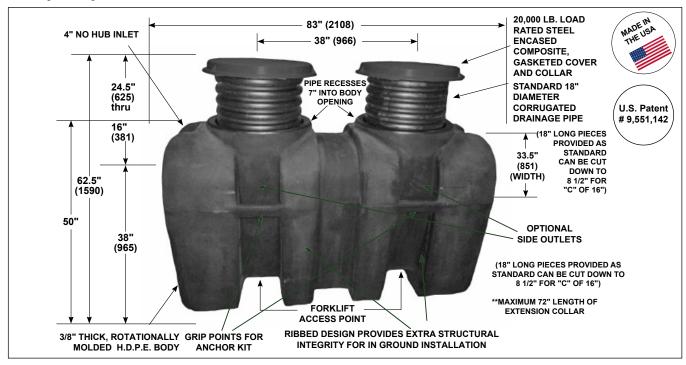

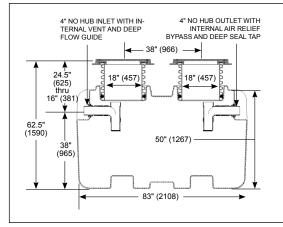

*Note: The XL-MI-SAND-PL-1150 does not meet PDI standard if outfitted with an internalflow control (-OP suffix). The PDI standard is only valid for the external flow control fitting.

MODEL NO.	LIQUID HOLDING CAPACITY (GAL)	SHIPPING WEIGHT (Lbs.)
XL-MI-SAND-PL-300	300	275

SUFFIX	OPTIONAL VARIATIONS
-AK	High water anchor kit (set of two)
-C	Lid extension (specify "C" dimension required) (Max. of 72")
-CL	Holdown brackets for lid (when installed above ground)
-DCL	Direct Connect Lid (lid bolted to top of body)
-DI	Ductile iron lid & collar
-FL-C	Membrane clamp kit
-LHSI	4" no hub inlet on left hand side
-LHSO	4" no hub outlet on left hand side
-OP	Internal flow control*
-RHSI	4" no hub inlet on right hand side
-RHSO	4" no hub outlet on right hand side
-SB	Sediment bucket
-SP	External Sample Port (for existing construction. Inlet and Outlet on the same level)
-T	Female threaded connections
-C	Secondary clamp
-E	Adjustable extension

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880