

DSA-Duct Support Series

DSA-Support Series

Specification Sheet:

Dimensions:

Telescopic Crossbeam:

Outer Piece - 1 7/8" x 1 7/8"

Inner Piece - 1 5/8" x 1 5/8"

Vari-Angle Bracket - 1 7/8" x 1 7/8"

Base: 4"H x 6"W x Length (see chart)

Material

Base: 100% recycled rubber, UV-resistant


Vari-Angle Bracket: 1/4" hot rolled, zinc plated carbon steel

Telescopic Crossbeam: 12 ga. galvanized steel channel

- Designed as a cost effective non-penetrating duct support system.
- Designed to adapt to any roof pitch using vari-angle C-Port bases.
- Can be adhered to any roof membrane using approved adhesives (if required).
- Telescopic cross-beam gives flexibility to fit duct sizes.
- Easy on-site adjustability.

Maximum Load - 300 lbs

*Consult roofing manufacturer or engineer for roof loading.

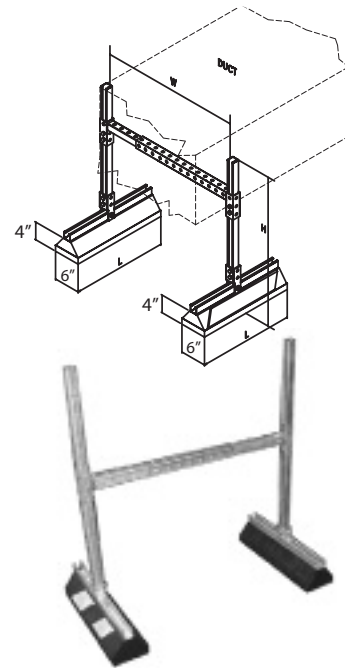

MODEL #	Width (W)		Base Length (L)	Weight
	Min.	Max.		
DSA10-1831	18" (457mm)	31" (787mm)	10" (254mm)	39.90 LBS
DSA10-3157	31" (787mm)	57" (1448mm)	10" (254mm)	45.10 LBS
DSA10-57102	57" (1448mm)	102" (2591mm)	10" (254mm)	50.10 LBS
DSA20-1831	18" (457mm)	31" (787mm)	20" (508mm)	50.25 LBS
DSA20-3157	31" (787mm)	57" (1448mm)	20" (508mm)	55.45 LBS
DSA20-57102	57" (1448mm)	102" (2591mm)	20" (508mm)	60.45 LBS
DSA30-1831	18" (457mm)	31" (787mm)	30" (762mm)	55.90 LBS
DSA30-3157	31" (787mm)	57" (1448mm)	30" (762mm)	61.10 LBS
DSA30-57102	57" (1448mm)	102" (2591mm)	30" (762mm)	66.10 LBS

Note: Uprights are not included. Strut can be to suit on job site.

available in corrosion resistant stainless steel or aluminum

MIFAB, Inc. 1321 West 119th Street, Chicago Illinois 60643-5109, USA
Tel: 1-800-465-2736 Fax: 773-341-3049

www.mifab.com