

Location: _____




F320

9" ROUND ADJUSTABLE AREA DRAIN

Specification: MIFAB Series F320 floor drain with anchor flange, primary and secondary weepholes, and standard 1" (25) thick, 9" (229) round, ductile iron tractor grate.

Function: Used in warehouses, mechanical rooms, parking garages and other membrane finished areas. 9" Round, adjustable tractor grate is used with all types of poured finished floors.

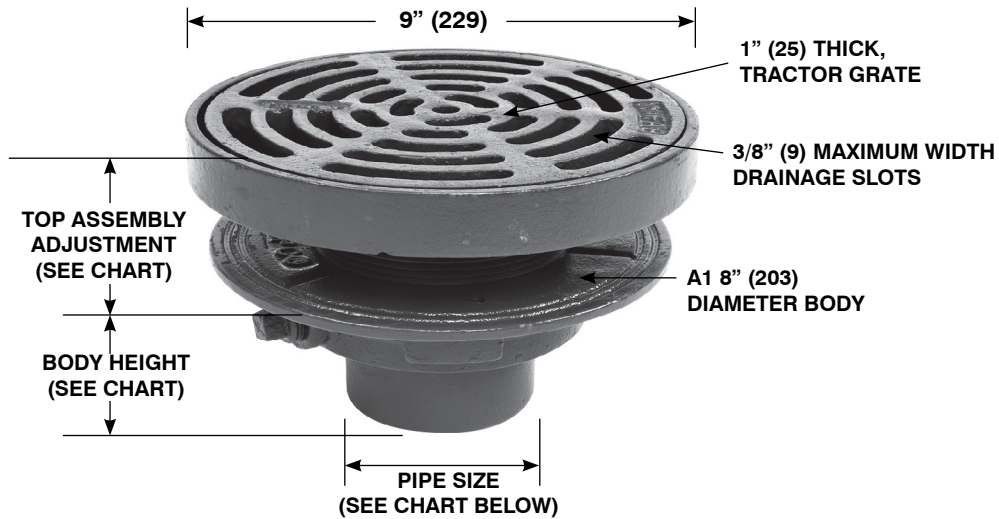

Metric equivalents see chart below. (Dimension) Denotes Millimetres

F324-4

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT		
	MIN	MAX	FREE AREA	LOAD RATING		NO HUB (STANDARD)	PUSH ON (P)	PVC/ABS (-30)/(-31)
				D.I. (-4)				
9" (229)	1 5/8" (41)	2 5/8" (67)	11 in ² (7096 ²)	OVER 10,000 LBS.	2" (51) 3" (76) 4" (102)	4" (102) 4" (102) 4" (102)	4 3/8" (111) 4 3/8" (111) 4 3/8" (111)	4 3/8" (111) 4 3/8" (111) 4 3/8" (111)

SUFFIX OPTIONAL VARIATIONS

- 6 Vandal proof
- C Membrane clamp

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contract: _____
 Purchase Order No: _____