

Location: _____

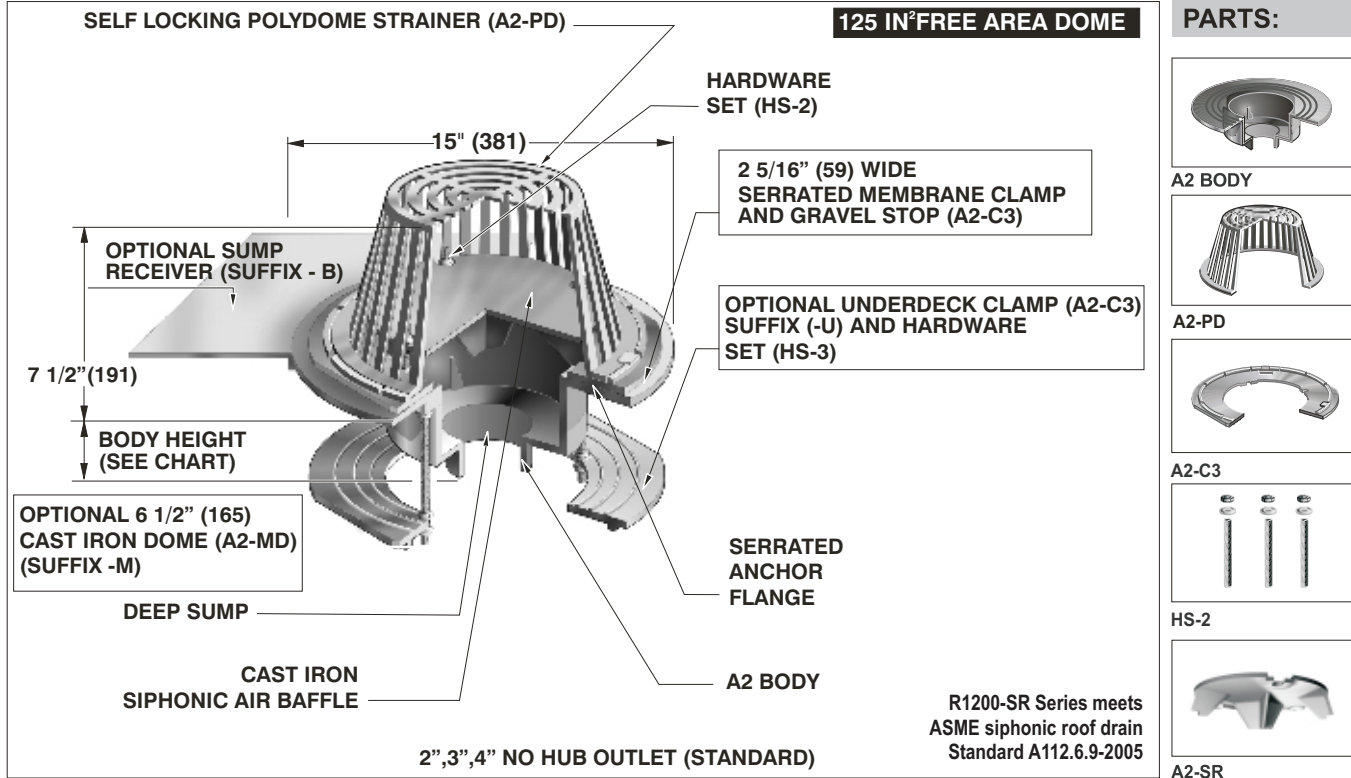







R1200-SR

LARGE SUMP SIPHONIC ROOF DRAIN

Specification: MIFAB® Series R1200-SR lacquered cast iron deep sump siphonic roof drain with secured siphonic air baffle, 15" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, and a standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: For use in engineered siphonic roof drainage systems. Used in any type of flat roof. Large free area dome provides for efficient drainage of rain water and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials. Siphonic air baffle greatly enhances drain capacity compared to conventional roof drains.



- PARTS:**
-  A2 BODY
 -  A2-PD
 -  A2-C3
 -  HS-2
 -  A2-SR

Note: Deck opening - 10" (254), with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)

<p>SUFFIX</p> <p>-6 Vandal proof dome (metal dome only)</p> <p>-11 Acid resistant epoxy coating</p> <p>-12 Galvanized metal dome</p> <p>-12A Galvanized body</p> <p>-12B Galvanized metal dome and membrane clamp</p> <p>-13 Galvanized body, membrane clamp, baffle and dome</p> <p>-28 Stainless steel body (fabricated) (Type 304)(2",3",4")</p> <p>-30 PVC socket connection body</p> <p>-31 ABS socket connection body</p> <p>-81 Rough bronze dome</p> <p>-83 Stainless steel mesh screen over dome</p>	<p>OPTIONAL VARIATIONS:</p> <p>(Standard)</p> <p>-ARRA No Hub outlet ARRA (Stimulus Act) compliant product</p> <p>-B Sump receiver</p> <p>-BA Buy American Act Compliant product</p> <p>-C Secondary clamp</p> <p>-E Adjustable extension</p> <p>-EG Galvanized Adjustable extension</p> <p>-G Stainless steel ballast guard</p> <p>-HC Adj. ballast guard with secondary clamp</p> <p>-JC S.S. ballast guard with secondary clamp</p> <p>-M Cast iron dome</p> <p>-M-80 Low profile aluminum dome</p>	<p>SUFFIX</p> <p>P Push on outlet</p> <p>-PA Pennsylvania Steel Act compliant product</p> <p>-R 2" external water dam</p> <p>T Threaded outlet</p> <p>-U Underdeck clamp</p> <p>-U3 Underdeck clamp with cutaway side</p> <p>-V Fixed static extension, 2", 3", 4"</p> <p>-VG Galvanized fixed extension (2", 3", 4")</p> <p>-W-1 Water proofing flange</p> <p>X Inside caulk outlet</p> <p>-XJ Vertical expansion joint (see R1900)</p> <p>-Z Extended wide elastomeric flange</p>
--	---	--

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880