

Location: _____



SP


**SPOOLS AND SPACERS
2 1/2" THRU 10"**

Specification: Beeco Spools and Spacers are custom made to retrofit into existing field installations where a shorter length valve is being installed.

Function: Beeco Spools and Spacers are designed for retrofitting backflow prevention assemblies, Automatic Control Valves or other piping system installations into spaces where a longer lay length exists. Spools are available in fused bonded epoxy coated carbon steel and come standard with AWWA 150# class "D" carbon steel flanges.


Features: The Beeco Spools and Spacers can be made in lengths 4" and up and can be either Flanged by Flanged, Grooved by flanged or grooved by Grooved configuration.

Material: Maximum working water pressure 175 PSI, Maximum working temperature 140° F Hydrostatic test pressure 350 PSI, Flanged end connection meet ANSI B16.1 and all grooved dimensions comply with AWWA C606.

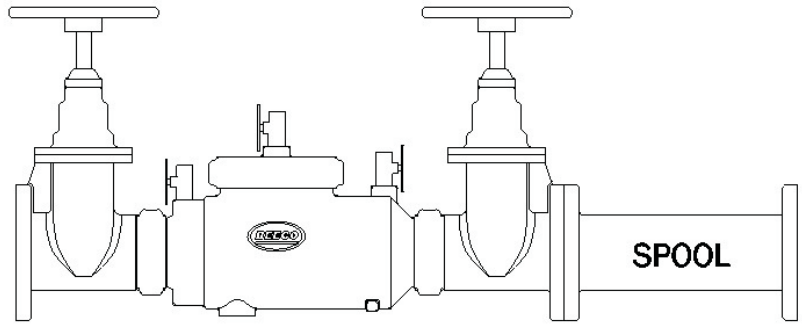

BEECO VALVE WITH SPOOL

Beeco Ordering Chart Pick End Connections and Fill in The

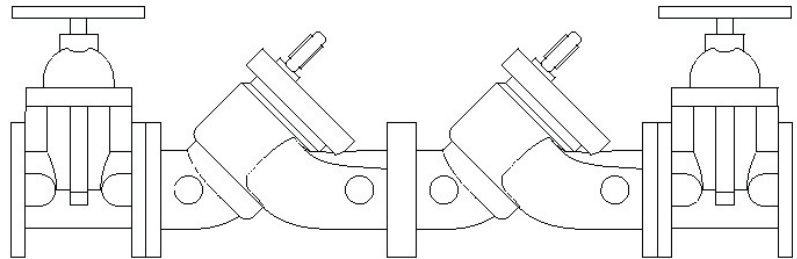

OLD VALVE

Flange Size	Flanged X Flanged	Flanged X Grooved	Grooved X Grooved	Length +/- 1/16"
-------------	----------------------	----------------------	----------------------	---------------------

SP2.50

SP3.00

SP4.00

SP6.00

SP8.00

SP10.00

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

BEECO reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.beecobackflow.com CAN: 1-800-387-3880