

Location: \_\_\_\_\_




**MH-300-PG,  
400-PG**

**SIPHONIC ROOF DRAIN FOR  
PROMENADE / PARKING DECKS**

**Specification:** MIFAB® Specification: MIFAB / Hydromax Series MH-300-PG, 400-PG (specify outlet connection size) lacquered cast iron promenade deck siphonic roof drain with wide anchor flange, cast iron waterproofing membrane clamp ring, ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware and ductile iron grate over the promenade deck top assembly.

**Function:** Used in promenade and parking decks as a siphonic roof drain system. The ductile iron promenade surface grate is flush to the surface and the siphonic roof drain system is underneath, within the promenade deck top assembly.

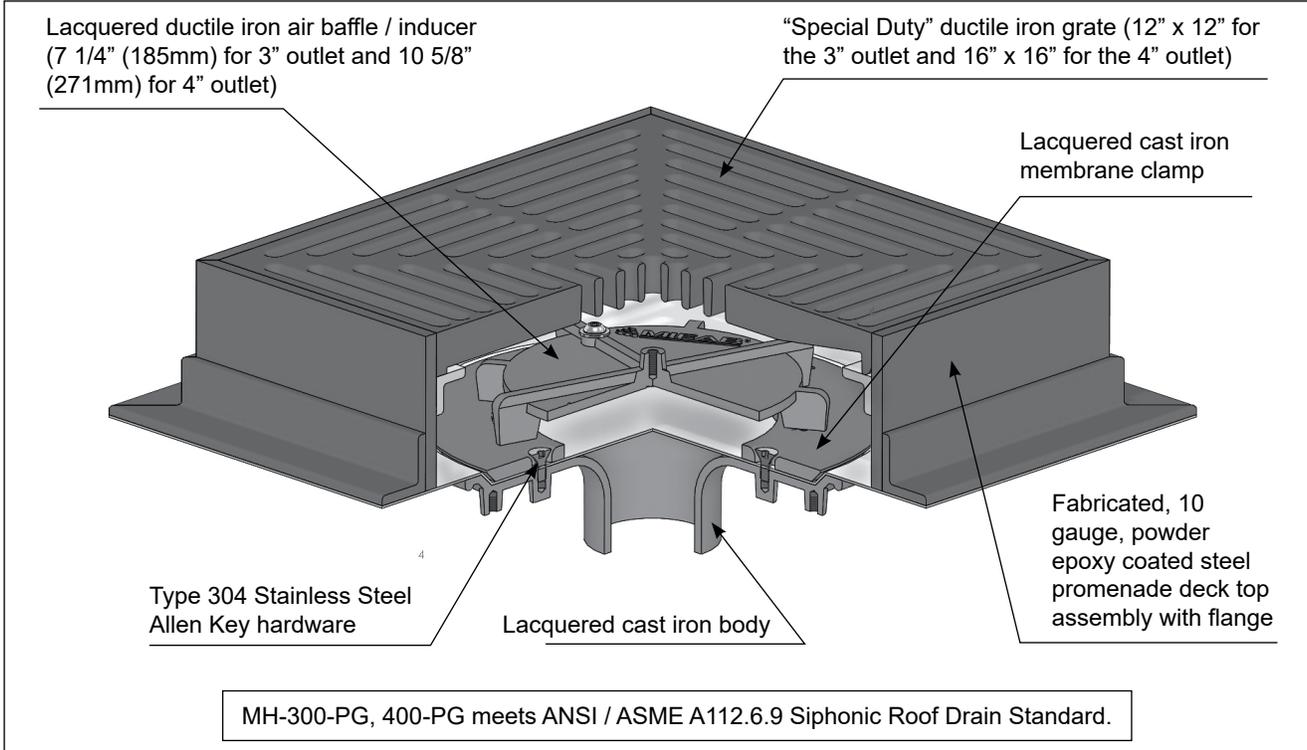

MH-300-PG, 400-PG meets ANSI / ASME A112.6.9 Siphonic Roof Drain Standard.

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE INFORMATION		
			Resistance Value (K)	Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)
MH-300-PG	3" (76)	3 1/8" (79)	0.12	23.00	415.00
MH-400-PG	4" (102)	3 1/2" (90)	0.08	75.00	750.00

Suffix	Description
-11	Acid resistant epoxy coated body
-12A	Galvanized body and membrane clamp
-B	Sump receiver
-BA	Buy American Act Compliant product
-C	Secondary clamp
-PA	Pennsylvania Steel Act compliant product

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_