

Location: _____




MI-FISH-PL

**Lil Max® - 7 to 50 GPM
Fish Scale Interceptors**




Specification: MIFAB® Series MI-FISH-PL ____ HDPE injection molded fish scale interceptor with flow rating of ____ (indicate) and liquid holding capacity of ____ (indicate). Unit shall include: two internal straining baffles (first one with 1/4" diameter holes and second one with 1/8" diameter holes - both spaced 1/2" apart, internal deep seal trap and HDPE injection molded, non skid, rectangular gasketed lid with securing latches.

Function: Used in facilities to receive waste water that contains fish scales. Typically installed either on or recessed in the floor. Regular maintenance is required to keep the interceptor functioning. The fish scale interceptor will filter out fish scales and sediment from the fixture waste line before entering the pipe system to reduce clogging. Interceptor is cleaned by removing the top gasketed lid and accessing the internal straining baffle. Simple latch design permits fast and easy removal of the lid for cleaning and maintenance. HDPE injection molded body and lid are covered by a limited lifetime warranty. All Lil Max interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

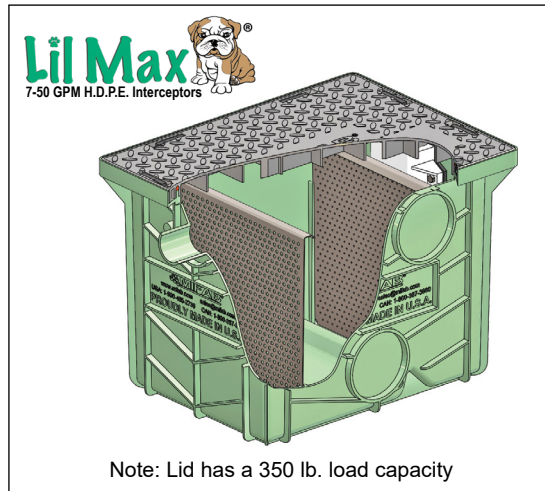

Note: Lid has a 350 lb. load capacity

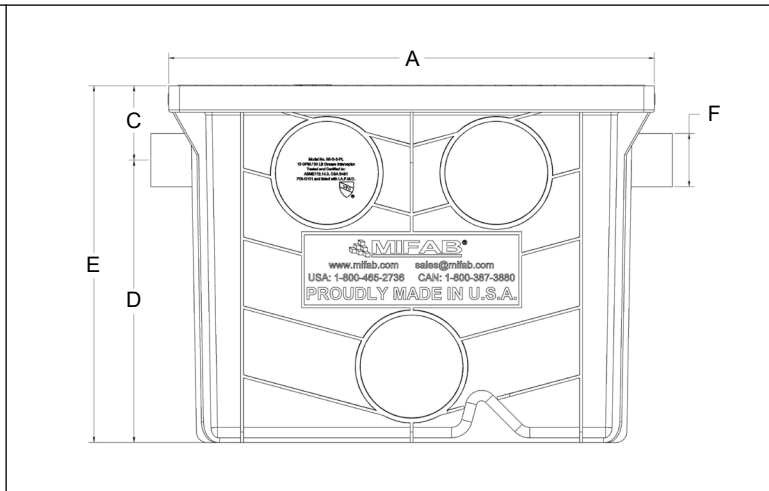

MODEL NO.	FLOW RATE (GPM)	LIQUID HOLDING CAPACITY (U.S.G.)	A (IN)	B (IN) WIDTH	C (IN)	D (IN)	E (IN)	F (IN)	Shipping Weight (lbs.) (in box)	Box Dimensions (L x W x H)
MI-FISH-7-PL	7	7.14	19.5	15.5	3.5	9	12.5	2	21	22" x 16" x 13"
MI-FISH-10-PL	10	10.99	23	17.5	3.5	9.75	13.25	2	30	25" x 18" x 14"
MI-FISH-15-PL	15	19.77	23	17.5	3.5	13.25	16.75	2	33	25" x 18" x 17.5"
MI-FISH-20-PL	20	18.57	29.5	20.5	3.5	10.75	14.25	3	41	32" x 21" x 15"
MI-FISH-25-PL	25	26.60	29.5	20.5	3.5	14.75	18.25	3	44	32" x 21" x 19"
MI-FISH-35-PL	35	44.56	33	25.5	5.5	16.75	22.25	3	57	35" x 26" x 23"
MI-FISH-50-PL	50	50.41	33	25.5	5.5	18.75	24.25	3	71	35" x 26" x 25"

Suffix	Description
-C	Extension "C" as required (up to 9" increments) (for models MI-FISH-20-PL and MI-FISH-25-PL) (contact MIFAB for other model extensions)
-C	Extension "C" as required (up to 9" increments) (for models MI-FISH-35-PL and MI-FISH-50-PL)
-F	Connection sizes different from standard (specify size) (by using a MIFAB MI-HUB increasing / reducing coupling).
-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-7-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-10-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-15-PL

-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-20-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-25-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-35-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-FISH-50-PL
-HD	Heavy duty 10 gauge steel lid (up to 2,000 lbs.) - see MI-CS cover shrouds from the MPB price book
-LHSI	No hub inlet on left hand side
-RHSI	No hub inlet on right hand side
-T	Female threaded connections

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880