

Location: _____




Lil Max® - 7 to 50 GPM
HDPE Solids Interceptors




Specification: MIFAB® MI-SOLID-PL _____ HDPE injection molded solids interceptor with flow rating of _____ (indicate) and solids storage holding capacity of _____ (indicate). Unit shall include: internal perforated sediment bucket (1/4" diameter holes) with coarse screen, baffle assembly (3/8" x 1 1/4" slots) and HDPE injection molded, non skid, rectangular gasketed lid with securing latches.

Function: Solids interceptors are required anywhere that solids may be introduced into the public sewer system in applications such as: barber shops, dentist offices, salons, artist studios, laundry facilities, machine shops, food waste, parking lots, car washes, food processing, livestock and agricultural drainage. These wastes must be separated before entering the sewer system. Typically installed between the grease interceptor and the fixtures served either on or recessed in the floor. The solids interceptor will filter out solids and sediment from the fixture waste line before entering the related grease interceptor to reduce clogging and improve performance. Interceptor is cleaned by removing top access gasketed lid and accessing the internal sediment bucket. Simple latch design permits fast and easy removal of the lid for cleaning and maintenance. HDPE injection molded body and lid are covered by a limited lifetime warranty. All Lil Max interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

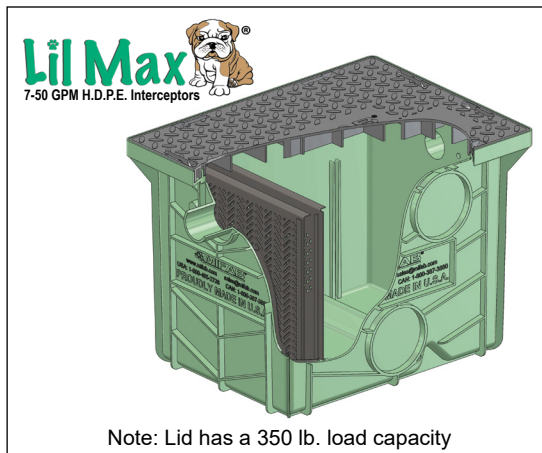

Note: Lid has a 350 lb. load capacity

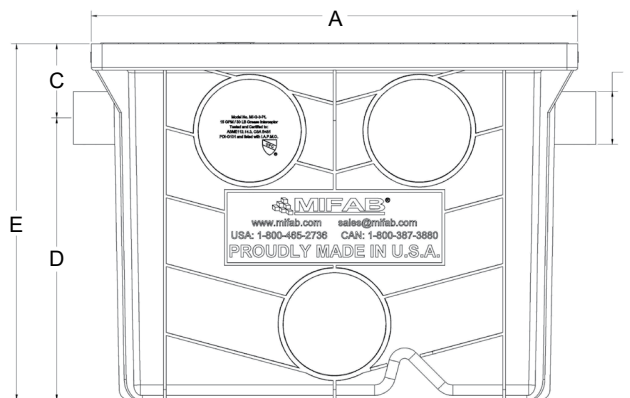

MODEL NO.	FLOW RATE (GPM)	SOLIDS STORAGE HOLDING CAPACITY (Cu. Ft.)	A (IN)	B (IN) WIDTH	C (IN)	D (IN)	E (IN)	F (IN)	Shipping Weight (lbs.) (in box)	Box Dimensions (L x W x H)
MI-SOLID-PL	7	0.955	19.5	15.5	3.5	9	12.5	2	21	22" x 16" x 13"
MI-SOLID-10-PL	10	1.468	23	17.5	3.5	9.75	13.25	2	30	25" x 18" x 14"
MI-SOLID-15-PL	15	2.056	23	17.5	3.5	13.25	16.75	2	33	25" x 18" x 17.5"
MI-SOLID-20-PL	20	2.482	29.5	20.5	3.5	10.75	14.25	3	41	32" x 21" x 15"
MI-SOLID-25-PL	25	3.556	29.5	20.5	3.5	14.75	18.25	3	44	32" x 21" x 19"
MI-SOLID-35-PL	35	5.957	33	25.5	5.5	16.75	22.25	3	57	35" x 26" x 23"
MI-SOLID-50-PL	50	6.738	33	25.5	5.5	18.75	24.25	3	71	35" x 26" x 25"

Suffix	Description
-C	Extension "C" as required (up to 9" increments) (for models MI-SOLID-20-PL and MI-SOLID-25-PL) (contact MIFAB for other model extensions)
-C	Extension "C" as required (up to 9" increments) (for models MI-SOLID-35-PL and MI-SOLID-50-PL)
-F	Connection sizes different from standard (specify size) (by using a MIFAB MI-HUB increasing / reducing coupling).
-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-10-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-15-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-20-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-25-PL
-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-35-PL

-FSCR	Stainless steel fine screen sediment bucket for MI-SOLID-50-PL
-HD	Heavy duty 10 gauge steel lid (up to 2,000 lbs.) - see MI-CS cover shrouds from the MPB price book
-LHSI	No hub inlet on left hand side (not available with sediment bucket)
-RHSI	No hub inlet on right hand side (not available with sediment bucket)
-T	Female threaded connections
-SB	Sediment bucket for MI-G-5-PL
-SB	Sediment bucket for MI-G-6-PL
-SB	Sediment bucket for MI-G-7-PL
-SB	Sediment bucket for MI-G-L-25-PL
-T	Female threaded connections
-T	Female threaded connections

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____