

SUPER-500

- 1. Inlet and Outlet No-Hub Connections.
- 2. Liquid Holding Capacity: 500 Gallons
- 3. H2O Load Rated Access Covers
- 4. Maximum Operating Temperature: 190Å Continuous

DETAILS








- Certified by CSA and IAPMO to ASME A112.14.3, CSA B481, and ANSI Z1001
- Approved installation to ASME A112.14.3 Type C
- Factory installed internal piping.
- 3/8" thick seamless high density polyethylene.
- Full internal access through lids.
- Vent not required for proper operation.
- Designed for above or below ground installations.
- Integral Anti-siphon Air Relief port.

SUFFIX

- AK
- C
- DP
- EP
- F6
- HLA

OPTIONAL VARIATIONS

- High water anchor kit
- Lid extension(specify)
- Dosing pump
- Enzyme port
- 6" No Hub inlet/outlet connection
- High level alarm

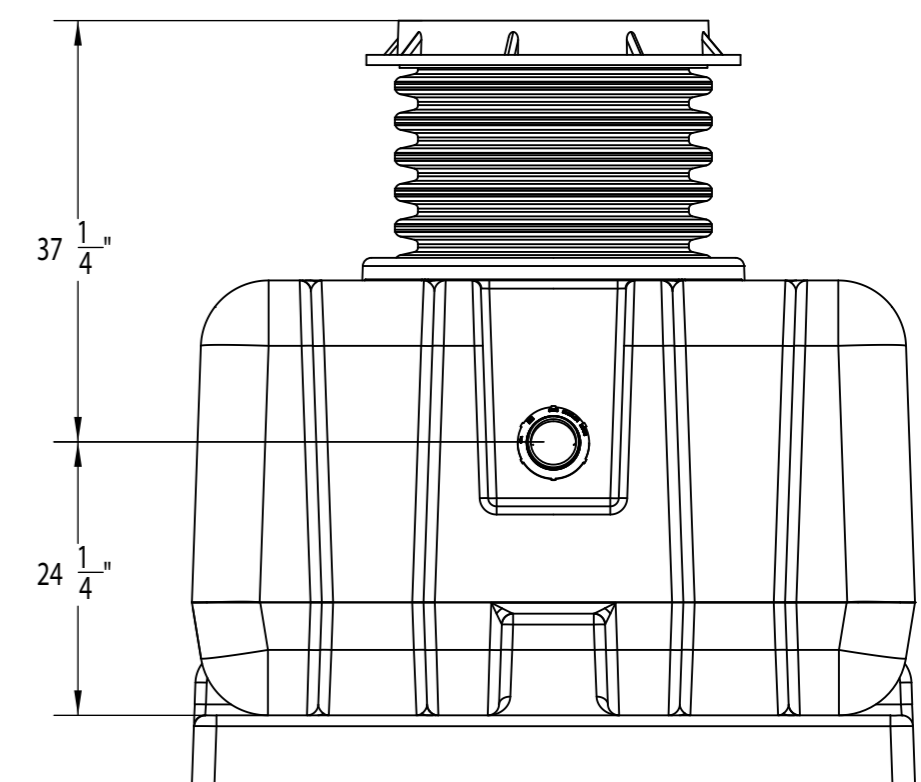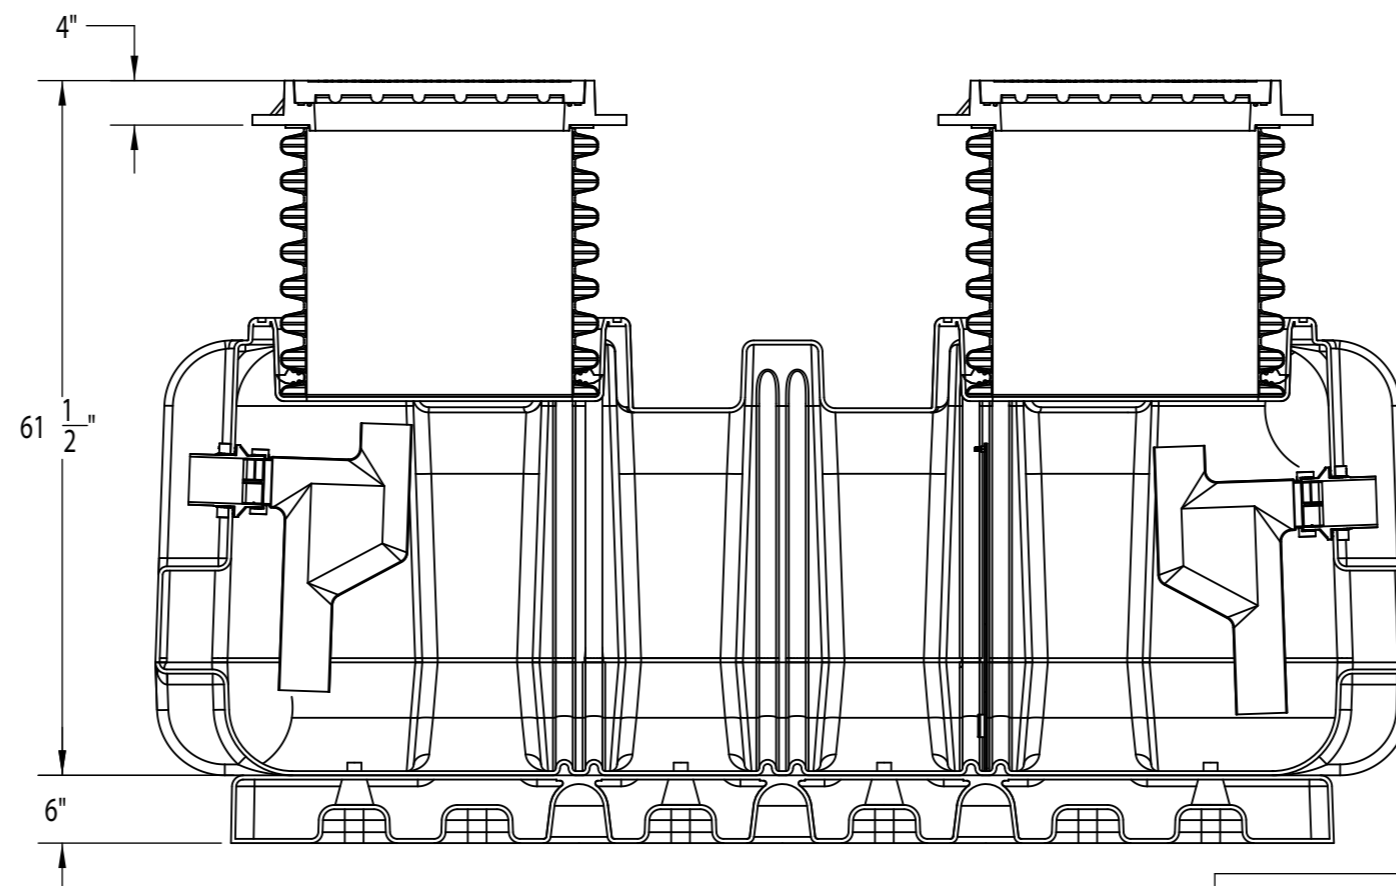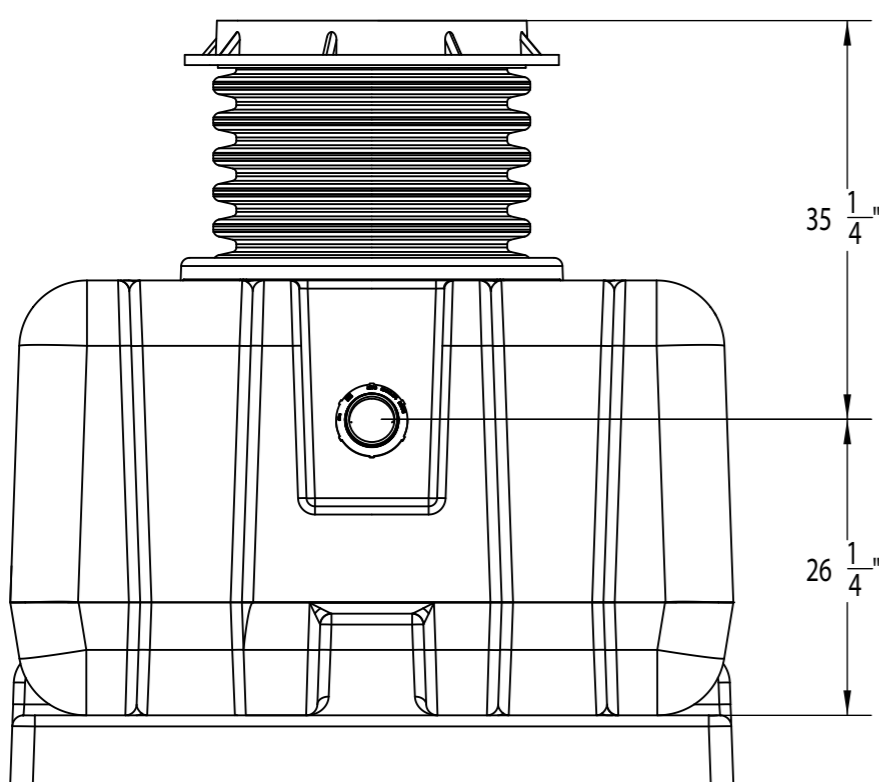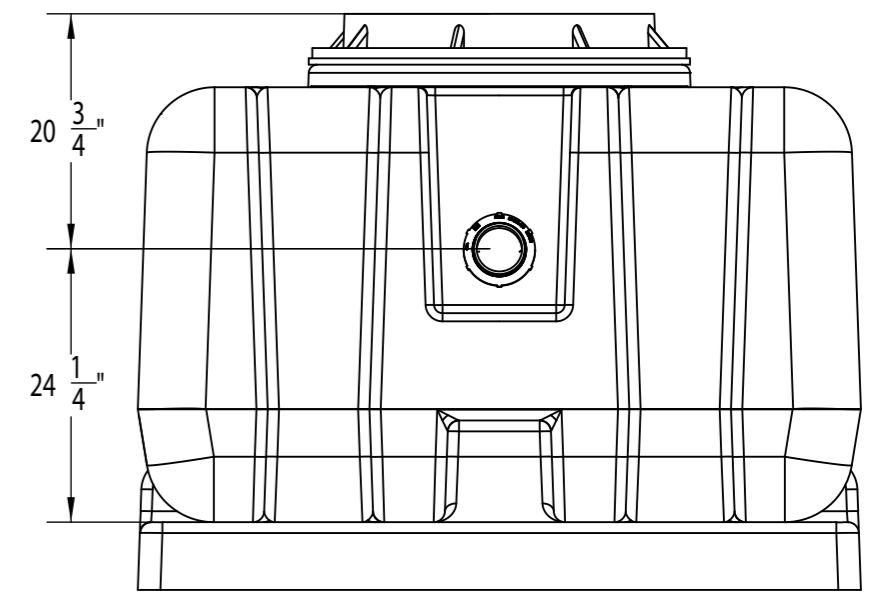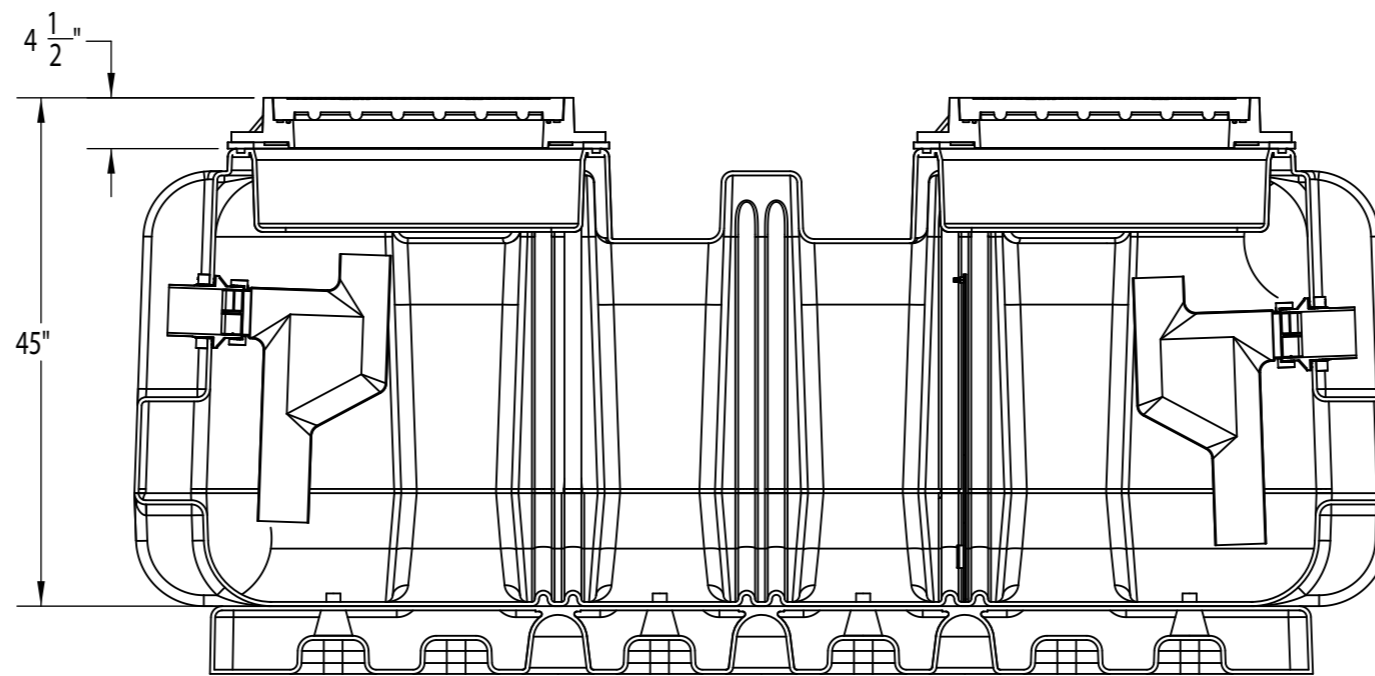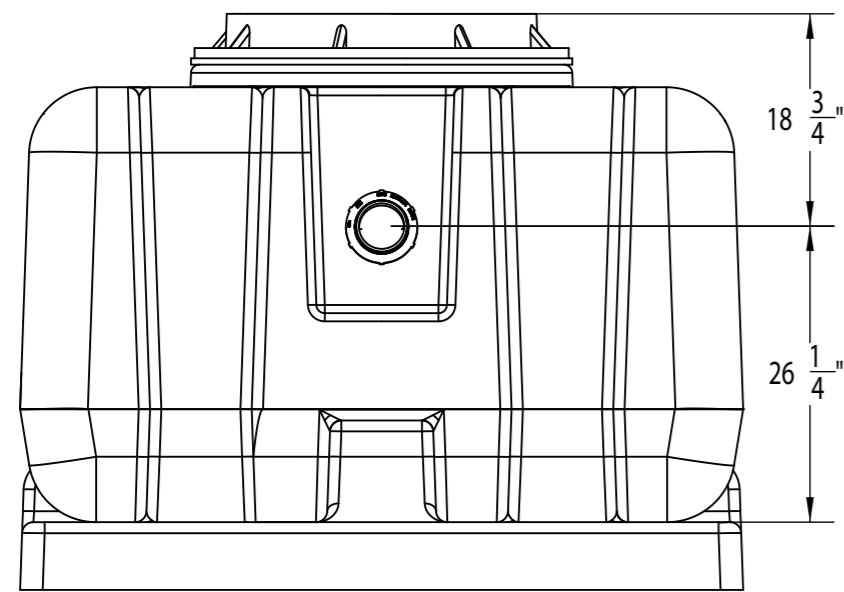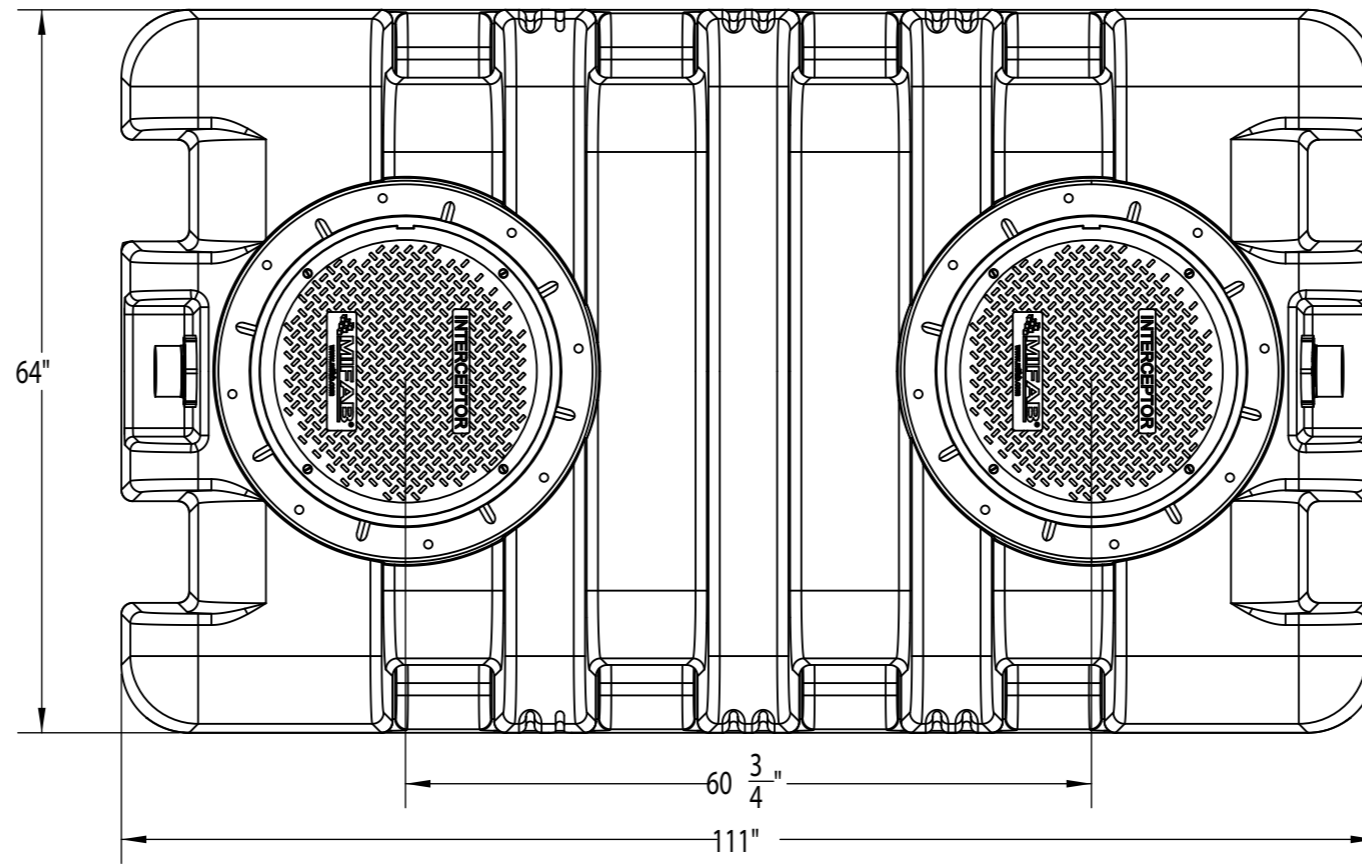

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MIFAB, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF MIFAB, INC. IS
PROHIBITED.

LASER/SHEAR:		UNLESS OTHERWISE SPECIFIED:	NAME	DATE	
BRAKE PRESS:		DIMENSIONS ARE IN INCHES	XX	XX	
WELDED BY:		TOLERANCES:	CHECKED	XX	TITLE:
CLEAN/PAINT:		FRACTIONAL ± 1/16	ENG APPR.		500gallon LIQUID HOLD CAP.
COMPLETED BY:		ANGULAR: MACH ± 1 A BEND ± 1 A	MFG APPR.		GREASE INT.
REVIEWED BY:		TWO PLACE DECIMAL ± .015	Q.A.		SIZE
NEXT ASSY	USED ON	THREE PLACE DECIMAL ± .010	QUANTITY:		C
APPLICATION		TYPICAL DRAFT ANGLE 2	SEE-BOM		DWG. NO.
		MATERIAL DESCRIPTION: SEE-BOM			SUPER-500
		FINISH PART#			REV
		XX			
		DO NOT SCALE DRAWING			SCALE: 1:17
					WEIGHT:
					SHEET 1 OF 1