

Location: _____




T1350-FL

12" WIDE, NEUTRAL SLOPED, CAST IRON BODY AND GRATE SYSTEM

Specification: MIFAB® Series T1350-FL, 12" wide, 7 3/4" deep, 12" long, non sloped modular trench drain with lacquered cast iron body sections. Each body has a 2" wide anchor flange cast into each side recessed 2" down from the top. Bodies have a radiused bottom and flanged ends to connect to each other with a neoprene rubber gasket in between. End outlets are available in 2", 3", 4" or 6" no hub outlet connections (specify outlet connection size) and bottom outlets are available in 2", 3", 4" or 6" no hub outlet connections (specify outlet connection size). 12" long, Class E, H-20 ductile iron grates are provided as standard (Suffix -4). End caps and catch basins are also available.

Function: Used in vehicle washdown areas, loading and parking areas, at the bottom of parking garages, warehouses and other locations that have heavy vehicle traffic. An infinite number of body sections can be assembled together to serve any requirement. Can also be used in small sections as an area drain.

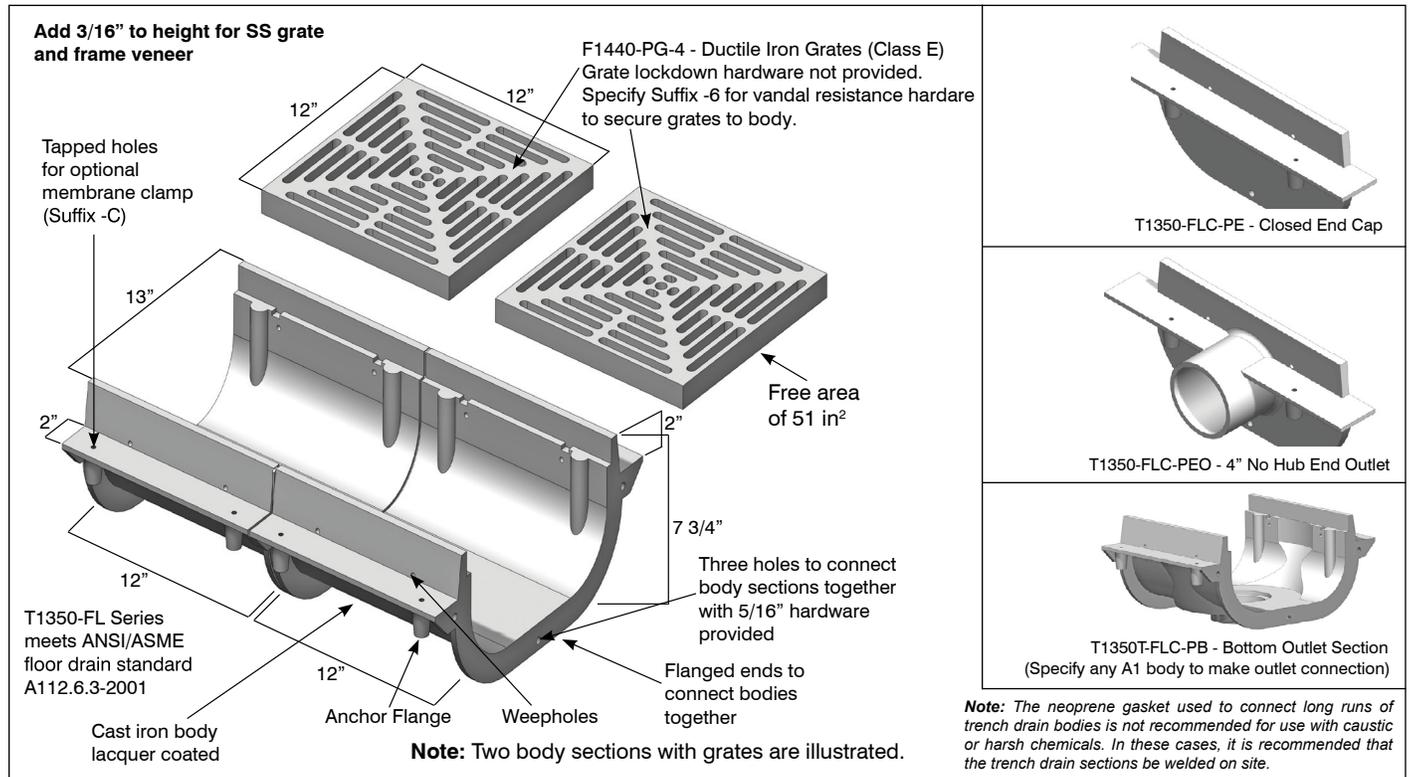

Note: Specify Specify total length of trench drain required in 12" long sections. Section "A" is standard with a bottom outlet (specify bottom outlet connection type and number and location of outlets required). Section "B" does not have a bottom outlet. Any number of Sections "A" and "B" can be bolted together to produce any length required. Stainless steel fabricated body trench drains are custom made to any design required. All trench drain orders require a factory drawing approved by the customer prior to production.

Suffix	Description
-5	Sediment bucket (per outlet section)
-6	Vandal proof grate (per grate) (H-1072B) (lockdown grate to body)
-8	Backwater valve (per piece)(BV1254)
-11	All acid resistant epoxy coated (per 12" section)
-12	Galvanized grate
-13	All galvanized (per 12" section)
-20	Dome bottom outlet strainer (per piece)

-95	Client logo (-3 SS veneer only)
-C	Membrane clamp (per foot)
P	Push on bottom outlet (2", 3" or 4")
-PSA	Pennsylvania Steel Act Compliant Product
S	End outlet (No Hub only, 4")
T	Threaded bottom outlet (2", 3" or 4")
X	Inside caulk bottom outlet (2" or 3")

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____