

Location: _____




T5000-300

3" WIDE, 5 7/8" DEEP ALUMINUM TRENCH DRAIN BODY AND GRATE

Specification: MIFAB® Series T5000-300, 3" wide, 5 7/8" deep, 40" long, (or length as needed), non sloped trench drain system. Body is manufactured from 14 gauge aluminum and has a 1 1/2" wide anchor flange on each side recessed 1 5/8" down from the top. Bodies have flanged ends to connect to each other with a neoprene rubber gasket in between. Grates are manufactured from 14 gauge aluminum and are supplied with grate lockdown hardware for each grate to secure to the body. End and bottom outlets are available in 2" no hub outlet connections and are fabricated as part of the trench drain system. Available with membrane clamps (Suffix -C) as required.

Function: Used around pool, residential and landscaped areas, decks that require surface drainage in shallow (only 5 7/8" deep) excavations. The lightweight aluminum body provides for long life. An infinite number of body sections can be assembled together to serve any requirement. 45 and 90 degree body sections are available. Compatible with vapor barrier applicatios.

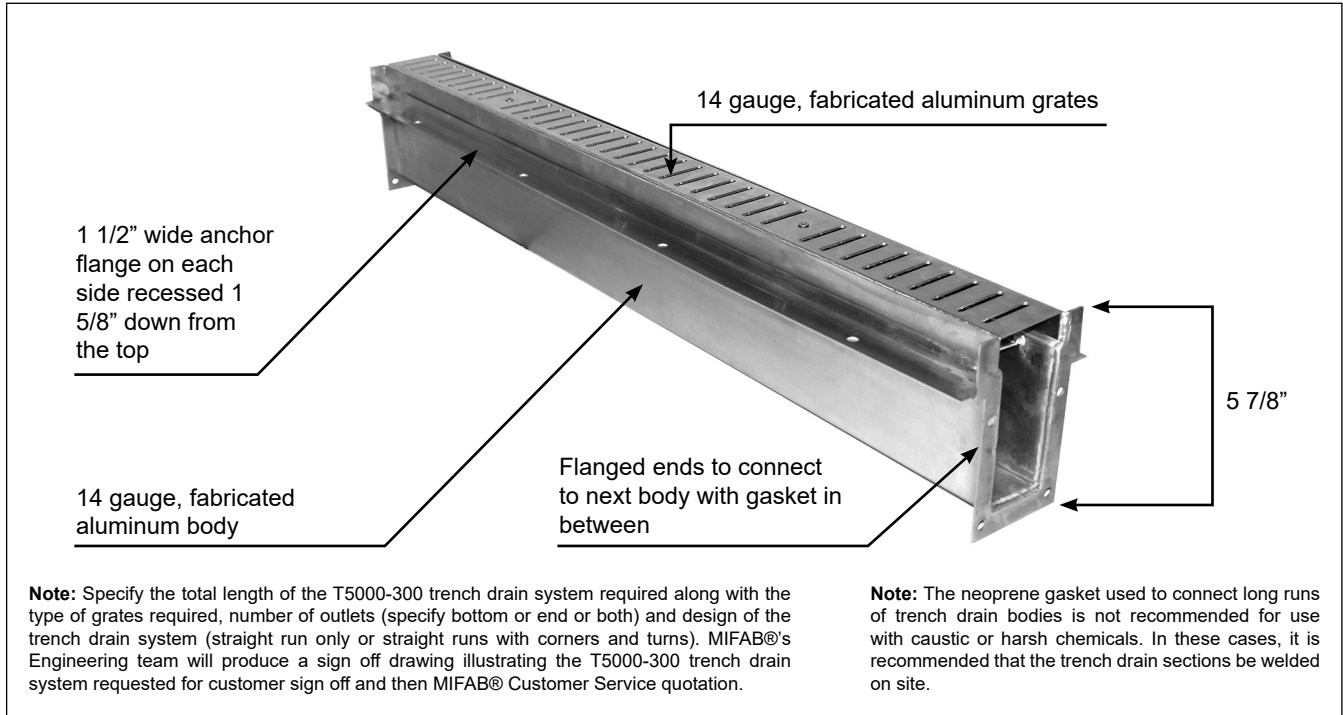

Note: Specify the total length of the T5000-300 trench drain system required along with the type of grates required, number of outlets (specify bottom or end or both) and design of the trench drain system (straight run only or straight runs with corners and turns). MIFAB®'s Engineering team will produce a sign off drawing illustrating the T5000-300 trench drain system requested for customer sign off and then MIFAB® Customer Service quotation.

Note: The neoprene gasket used to connect long runs of trench drain bodies is not recommended for use with caustic or harsh chemicals. In these cases, it is recommended that the trench drain sections be welded on site.

Grates (all 40" long. One grate required per body section)	
Suffix	Description
-A	Aluminum decorative slotted grate - Class A
-BA	Buy American Act compliant product
-PA	Pennsylvania Steel Act compliant product
-7MG	MI-GARD trap seal protection device (available for 1-1/2", 2", 3", 3-1/2", 4" and 6" outlet connections)
-AWG	Aluminum wire grate - Class A
-SSDA	Stainless steel, Decorative grate - Class A
-FSGA	Galvanized Steel, fabricated slotted grate - Class A
End caps / Outlets	
-PEC	Closed end cap
-PE2	2" no hub end outlet
-PB2	2" no hub bottom outlet

Accessories and 45 and 90 Degree Fabrications	
-PGLVP	1 1/2" long vandal resistant grate lockdown hardware (1 per body section - for each grate)
Standard	5/16-18 x 2" Zinc Coated Bolts (2 per package) - for grate lockdown
-SSB	5/16-18 x 2" Stainless Steel Bolts (2 per package) - for grate lockdown
-45	45 Degree Body Section
-90	90 Degree Body Section
-45G	45 Degree aluminum, slotted grate - Class A
-90G	90 Degree aluminum slotted grate - Class A
-CUT	Cutting / per cut - Net Price only
-TEE	Tee Fabrication
-CF	Cross Fabrication
-C	Membrane clamps (2 - one for each side of the body) with hardware

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____