


TOPSIDER BOLT ON SUMP RECEIVER

Specification: MIFAB® Series A2-BP-DP lacquered 18 gauge galvanized steel sump receiver with a double recess to receive the flange of the roof drain body flush and to bolt the roof drain body to the underside of the sump receiver.

Function: Used in any type of flat roofs. The underdeck clamp ring is eliminated with this product because the roof drain body is bolted to the underside of the sump receiver and is therefore fixed. Three pieces of 5/16" x 3/4" hardware bolts are provided to secure MIFAB's A2 roof drain body to the underside of A2-BP-DP.

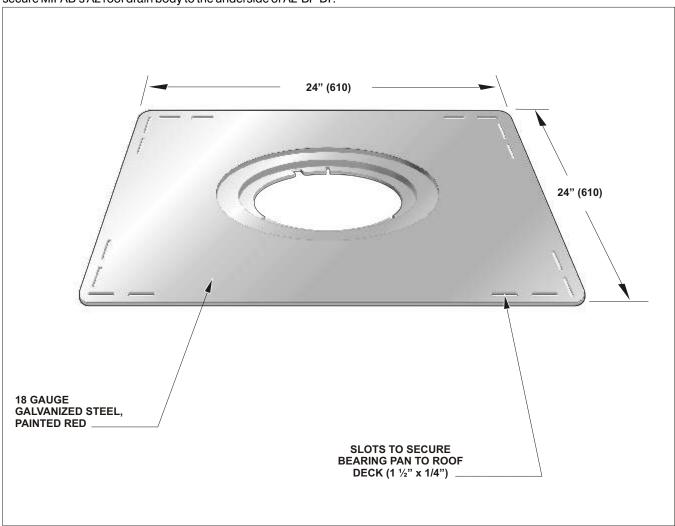

Note: Overall recess is 1.45"

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No: