

Location: _____




F1580

24" X 24" HEAVY DUTY DEEP SUMP DRAIN WITH BOTTOM OUTLET

Specification: MIFAB® Series F1580 powder epoxy coated deep sump drain with secondary dome strainer, bottom outlet and extra heavy duty 24" x 24" (610 x 610) two section ductile iron grates with a free area of 200 square inches (129,032²). Grates to have maximum 13/16" (21) openings.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 24" x 24" tractor grate is used with all types of poured finished floors.

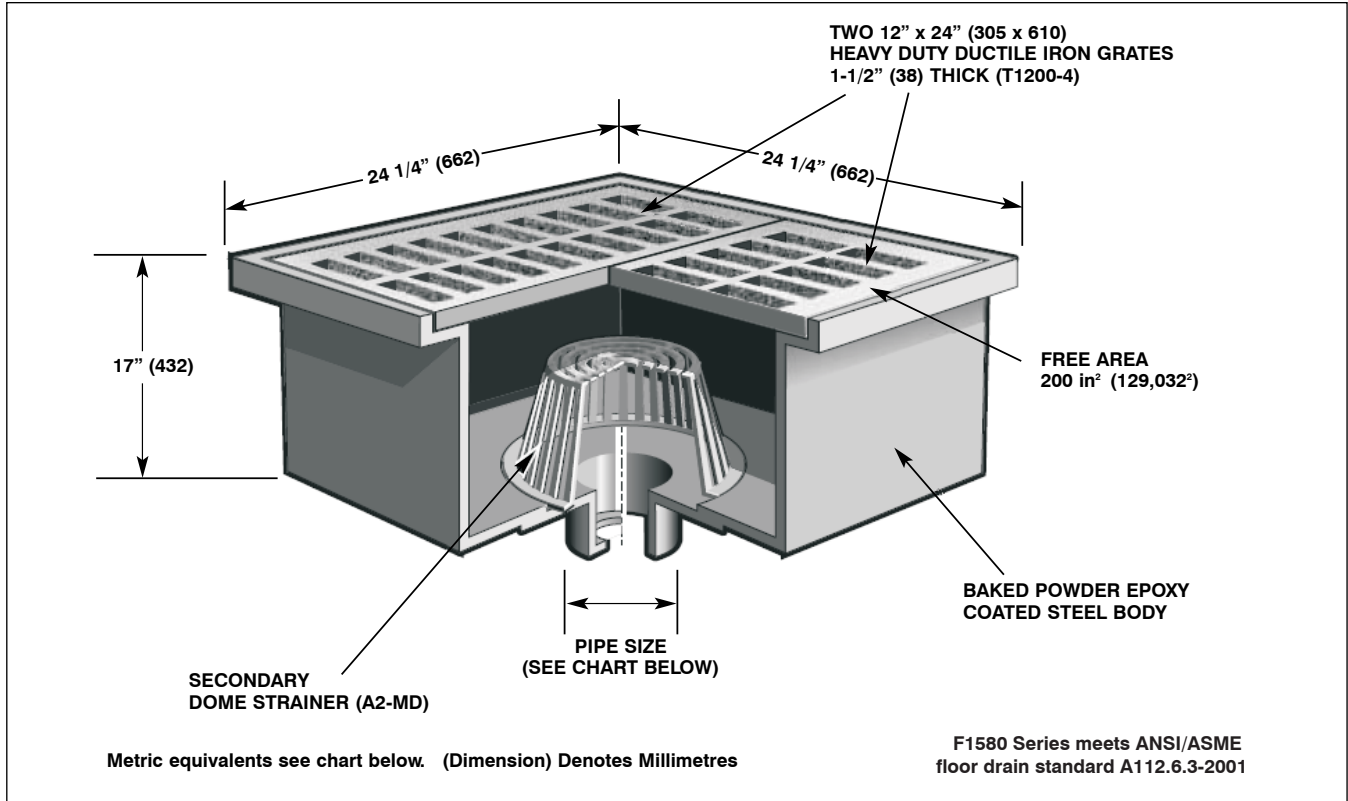

MODEL NO.	BODY HEIGHT
F1580-A	2" (51)
F1580-B	3" (76)
F1580-C	4" (102)
F1580-D	6" (152)
F1580-E	-

Suffix	Description
-3	Stainless steel strainer (vener)
-4	Ductile iron strainer
-5	Sediment bucket (F1580-SB)
-6	Security screws (T-20 Torx & pin)
-8	Backwater valve (2", 3", 4")
-12	Galvanized top assembly
-13	Galvanized body

-28	Stainless steel body and grate (Type 304)
-BA	Buy American Act compliant product
-FL	Anchor flange
-FLC	Anchor flange and membrane clamp
-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-PA	Pennsylvania Steel Act compliant product
(Specify)	Special outlet size

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____


Schedule No: _____ Purchase Order No: _____

Location: _____



F1580

**24" X 24" HEAVY DUTY DEEP SUMP
DRAIN WITH BOTTOM OUTLET**

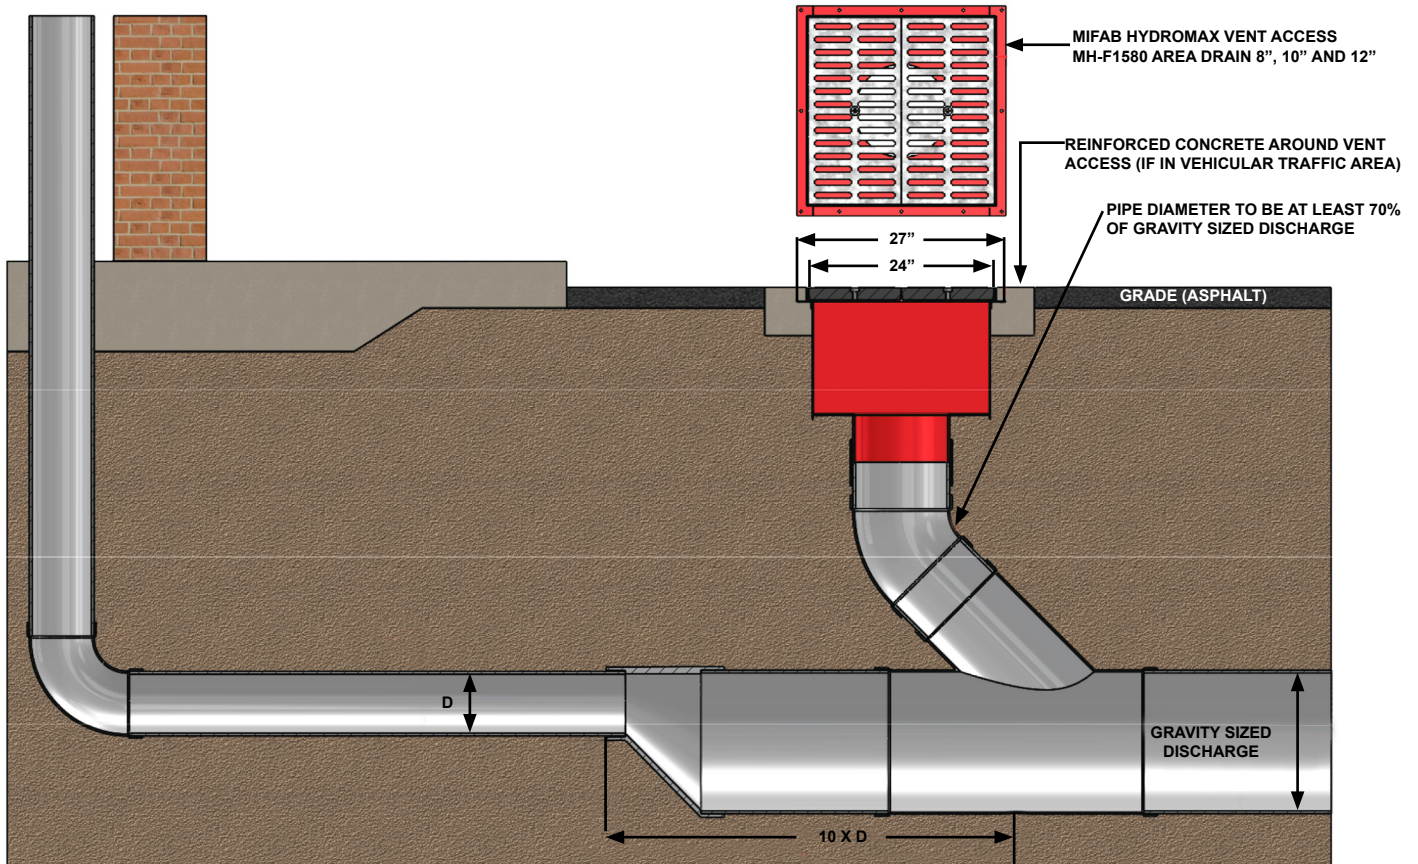

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____

MIFAB® reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

2017-11-29