


26" Wide Grates for T2600 Trench Drain System


Grate Part Number	Suffix	Description	Material	Weight (lbs./ft.)	Length	Free Area (sq. in. per ft.)	Slot Width / Hole Size	ADA	Load Ratings			
									DIN	ANSI	H-20	FAA
T2600-PC	-PC	Solid Cover	Steel	50.00	20"	N/A	N/A	Yes	C	Heavy Duty	Yes	No
T2600-PGC-4	-PGC-4	Slotted Grate	Ductile Iron	85.20	12"	132.00	1.030"	No	C	Heavy Duty	Yes	No
T2600-PG-LGHP	-LGHP	Heel Proof Longitudinal	Steel	47.00	20"	39.40	0.250"	Yes	C	Heavy Duty	Yes	No
T2600-PGF-4	-PGF-4	Slotted Grate	Ductile Iron	85.20	12"	132.00	1.030"	Yes	F	Special Duty	Yes	Yes



T2600-PC

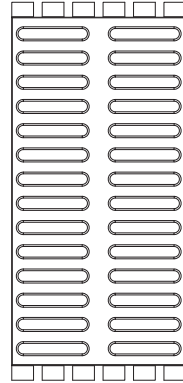

T2600-PGC-4 / PGF-4

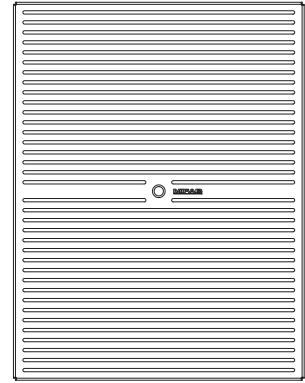

T2600-PG-LGHP

4 3/4" Wide Grates for T275 Trench Drain System


Grate Part Number	Suffix	Description	Material	Weight (lbs./ft.)	Length	Free Area (sq. in. per ft.)	Slot Width / Hole Size	ADA	Load Ratings			
									DIN	ANSI	H-20	FAA
T275-PG-SSDA	-SSDA	Decorative	Stainless Steel	1.50	Per Spec	11.50	0.250"	No	A	Light Duty	No	No
T275-PG-FSGA	-FSGA	Fabricated Slotted	Galvanized Steel	1.80	Per Spec	10.20	0.375"	No	A	Light Duty	No	No
T275-PG-FS	-FS	Fabricated Slotted	Stainless Steel	1.80	Per Spec"	10.20	0.375"	No	A	Light Duty	No	No
T275-PG-HPP	-HPP	Heel Proof Slotted	Polypropylene	0.78	Per Spec"	10.30	0.250"	Yes	A	Light Duty	No	No
T275-PGG	-PGG	Fabricated Perforated	Galvanized Steel	1.20	Per Spec"	5.90	0.250" Dia.	Yes	A	Light Duty	No	No
T275-PG-PS	-PS	Fabricated Perforated	Stainless Steel	1.20	Per Spec	5.90	0.250" Dia.	Yes	A	Light Duty	No	No
T275-PG-4	-4	Slotted	Ductile Iron	5.20	Per Spec	12.20	0.375"	No	E	Special Duty	Yes	Yes




T275-PG-SSDA



T275-PG-FSGA / FS



T275-PGG / PS



T275-PG-HPP



T275-PG-4

Custom grate patterns and logos in steel and stainless steel are available upon request. Contact MIFAB®.

Note: Custom designs are available. Contact MIFAB®