

Location: _____




HY-4000-NPB


**HOT AND COLD NON FREEZE
WALL HYDRANT**

Specification: MIFAB® Series HY-4000-NPB ____ A.S.S.E. 1019-B approved exposed type, self draining, non freeze hot and cold wall hydrant with A.S.S.E. 1011 approved anti-siphon integral vacuum breaker with 3/4" male hose connection. Hydrant assembly complete with hot and cold temperature control selection, one piece neoprene plunger to control the flow, hardened bronze operating stem, heavy duty brass casing, heavy duty chrome plated bronze head casing and chrome plated face plate. Loose tee key to be furnished with each hydrant.

Function: Designed for use in restaurants, food service areas and other facilities that require anti-contamination hot and cold potable water supply.

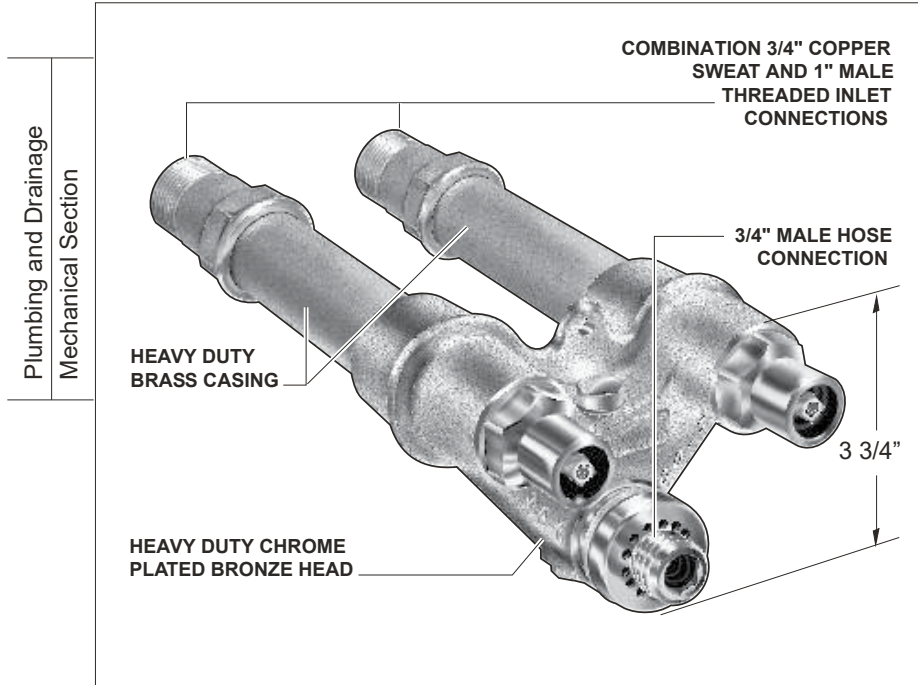

Overhead view

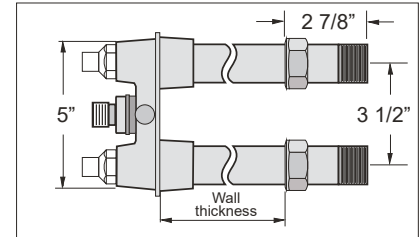

- **HY-4000-NPB SERIES FEATURES:**
- **INTERNAL COMPONENTS** - hardened bronze operating stem and one piece neoprene plunger.
- **VACUUM BREAKER** - integral vacuum breaker protects owner from anti-siphon conditions. Self draining.
- **FACE PLATE** - chrome plated.
- **CASING** - heavy duty brass.
- **APPROVALS** - HY-4000-NPB Series wall hydrant is tested and certified to the A.S.S.E. Standard 1019-B and listed by I.A.P.M.O. The anti-siphon vacuum breaker is tested and certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.

MODEL NO.	WALL THICKNESS		OVERALL LENGTH		APPROXIMATE WEIGHT		SWIVEL INLET CONNECTION
	IN	MM	IN	MM	Lbs.	Kg.	IN
HY-4004-NPB	4	102	11	279	4	1.81	3/4" Female Sweat, 1" Male IPS combination
HY-4006-NPB	6	152	13	330	7.54	3.42	3/4" Female Sweat, 1" Male IPS combination
HY-4008-NPB	8	203	15	381	8.26	3.74	3/4" Female Sweat, 1" Male IPS combination
HY-4010-NPB	10	254	17	432	8.98	4.10	3/4" Female Sweat, 1" Male IPS combination
HY-4012-NPB	12	305	19	483	9.70	4.39	3/4" Female Sweat, 1" Male IPS combination
HY-4014-NPB	14	356	22	559	10.42	4.72	3/4" Female Sweat, 1" Male IPS combination
HY-4016-NPB	16	406	23	584	11.14	5.05	3/4" Female Sweat, 1" Male IPS combination
HY-4018-NPB	18	457	25	635	11.86	5.38	3/4" Female Sweat, 1" Male IPS combination
HY-4020-NPB	20	508	27	686	12.58	5.70	3/4" Female Sweat, 1" Male IPS combination
HY-4024-NPB	24	610	31	787	14.02	6.35	3/4" Female Sweat, 1" Male IPS combination

- SUFFIX OPTIONAL VARIATIONS:**
- BA Buy American Act compliant product
 - PA Pennsylvania Steel Act compliant product
 - WC Wall clamp
 - 0 1" (25) Hose connection
 - 6 3/4" (19) I.P.S. 90 degree elbow and union nut

(Dimension) Denotes Millimetres

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____