

Location: \_\_\_\_\_




**HY-9000-NPB**

**LOW LEAD, QUARTER TURN, ROUGH BRONZE, ANTI-CONTAMINATION WALL FAUCET**


Specification: MIFAB® Series HY-9000-NPB exposed type, low lead, mild climate, anti-contamination rough bronze, wall faucet with 3/4" (19) male hose connection and anti-siphon vacuum breaker. The body of the HY-9000-NPB is made from low lead bronze and has a rough bronze finish. Operating handle to be operating key and inlet connection to be (specify 1/2" (13) or 3/4" (19) F.P.T.). Vacuum breaker to be certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.

**HY-9000 Series wall faucet**

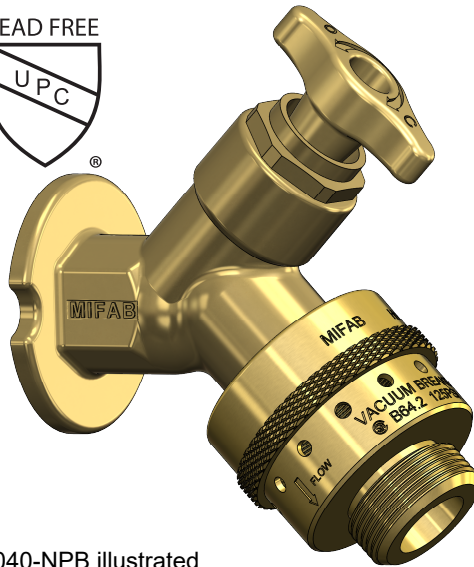

HY-9040-NPB illustrated

**HY-9000 Series wall faucet dimensions**

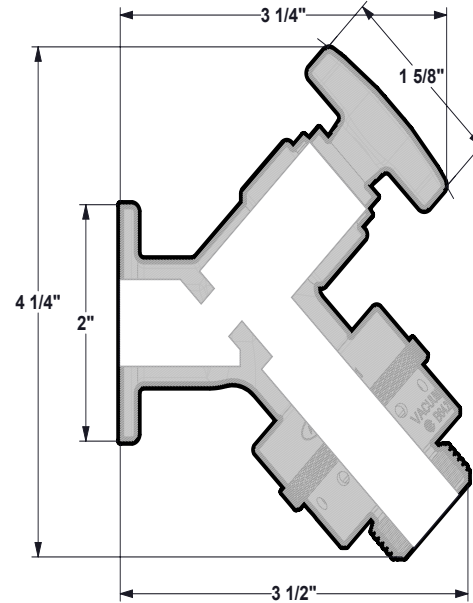

MODEL NO.	PRODUCT FINISH	OPERATING DEVICE	CONNECTION
HY-9040-NPB	Rough Brass	Operating loose tee key	1/2" F.P.T.
HY-9041-NPB	Rough Brass	Operating loose tee key	3/4" F.P.T.

The wetted surface contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

**Function:** MIFAB'S HY-9000-NPB Series of anti-contamination wall faucet is engineered for use in mild climate areas on residential, commercial, industrial, and institutional properties. It is manufactured and shipped with an anti-siphon vacuum breaker.

**Exterior Finish:** Rough bronze.

**Operating Handle:** Operating key. The square brass stud that receives the screw to secure the operating key is shielded for tamper proofing.

**Vacuum Breaker:** Unique vandal resistant vacuum breaker protects from anti-siphon conditions. It is self draining and is engineered with fine male threads on the end that screws into the faucet body to ensure that the vacuum breaker must be in place in order for a hose connection to be secured to the faucet. The hose connection is 3/4" (19) male. The anti-siphon vacuum breaker is tested and certified to the A.S.S.E. Standard 1011 and listed by I.A.P.M.O.

**Connection:** Either 1/2" (13) or 3/4" (19) F.P.T. (female pipe thread connections). Only N.P.T. (tapered) threads can be used to connect the MHY-9000-NPB Series to the supply line. Do not use N.P.S.M. (straight) threads.

**Shipping Weight:** One lb. (.45 kg) per unit. Master box quantities is 24 pieces per box.

**SUFFIX**

- B brass box
- BK Cast brass box with cylinder lock
- B-49 Chrome plated cast brass box
- BK-49 Chrome plated cast brass box with cylinder lock

**OPTIONAL VARIATIONS: Cast**



CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:   
 Section No:   
 Schedule No:

Page No:   
 Contract:   
 Purchase Order No:

MIFAB® reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

2025-03-25