

Location: _____




R1200-JD-STR

LARGE SUMP ROOF DRAIN W/EXTENSION HARDWARE AND SUMP PAN DESIGNED FOR NEW AND REPLACEMENT ROOFING

Specification: MIFAB® Series R1200-JD-STR lacquered cast iron large sump 15" diameter roof drain with anchor flange, large cast iron water proofing membrane clamp ring with four bolt pattern, integral gravel stop and standard self-locking cast iron dome strainer with a free area of 103 square inches. W/A8-BP-STR lacquered 18 gauge sump pan 30" x 30" and HS-8 hardware.

Function: The units assembled together provide a roof drainage system w/ a extension range of 3/4" to 8" to accommodate for specified insulation heights provided by the roofer. Slots provided around the base of the sump pan permit the installer to secure this system to the top of the deck. The R1200-JD-STR is professionally designed for new and replacement installations.

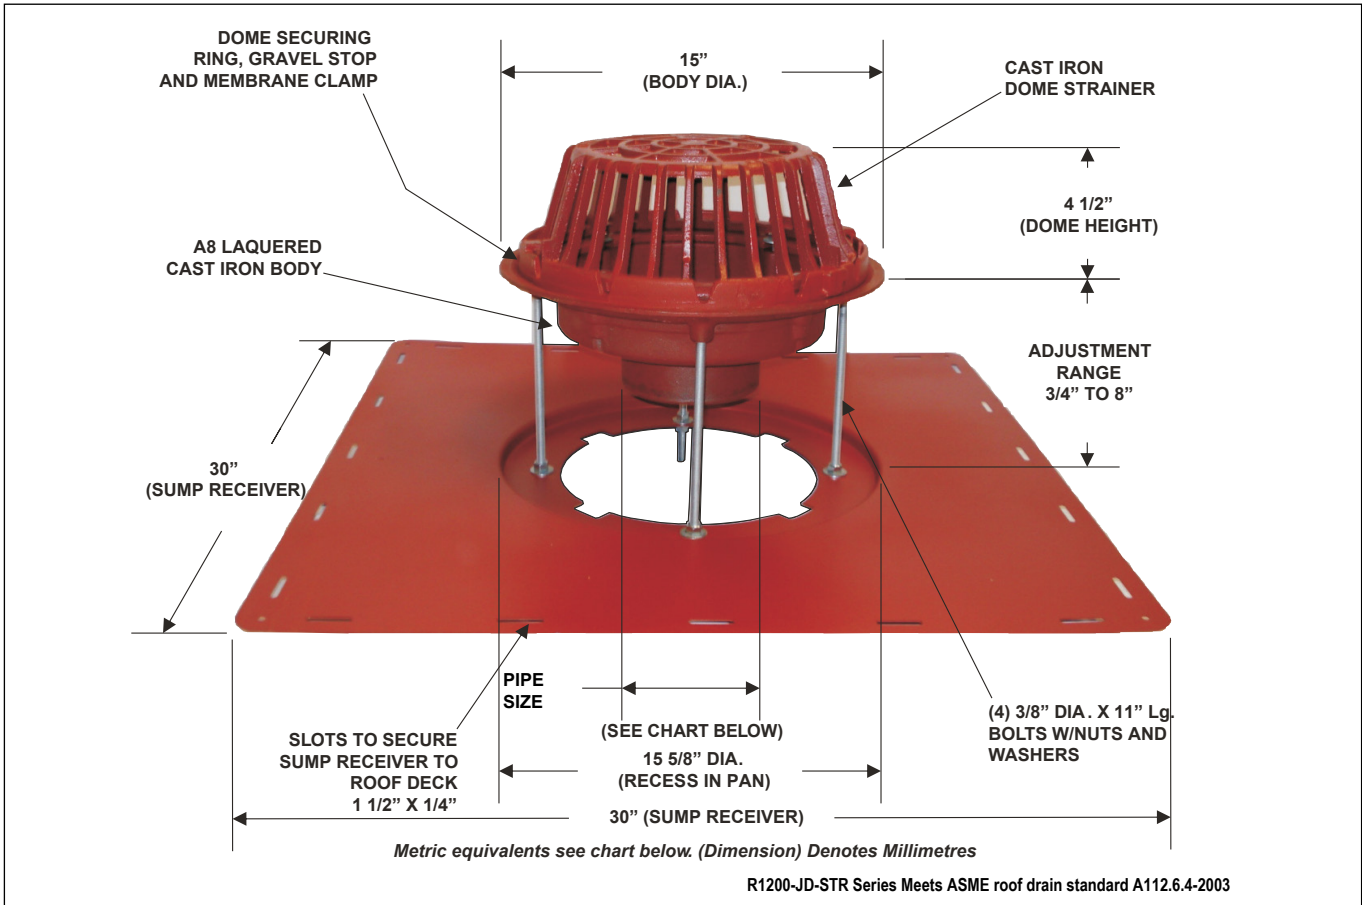

PIPE SIZE	NO HUB (STANDARD)	INSIDE CAULK (X)
3" (76)	4 1/8" (105)	4 1/8" (105)
4" (102)	4 1/8" (105)	4 1/8" (105)
6" (152)	4 1/8" (105)	4 1/8" (105)

SUFFIX	OPTIONAL VARIATIONS
-6	Vandal proof dome
-11	Acid resistant epoxy coating
-12	Galvanized metal dome
-12A	Galvanized body and membrane clamp
-13	Galvanized body, membrane clamp and dome
-83	Stainless steel mesh screen over dome

SUFFIX	OPTIONAL VARIATIONS
(Standard)	No hub outlet
-BA	Buy America Act compliant product
-G	Stainless steel ballast guard
-PA	Pennsylvania Steel Act compliant product
-RG	RoofGuard non clogging cast iron dome
X	Inside caulk outlet (2", 3", 4")

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____