

Location: \_\_\_\_\_




# T2000-SD-21H

21" DEEP, 12" WIDE, POLYPROPYLENE BODY SLOT DRAIN WITH 1-3/4" SLOT OPENINGS

**Specification:** MIFAB® Series T2000-SD-21H, 39.40" long, 21" deep, 9.7" internal body width, neutral sloped slot drain system. Body is manufactured from polypropylene. Each body has six tabs for #5 rebar tie down and leveling. Bodies have interlocking ends, a radiused bottom for efficient liquid drainage and have staggered, semi-circular cutouts on each side at the bottom to enable concrete flow underneath the body. Complete with a 1 3/4" wide slot opening top assembly that has spacer bars at 5" intervals to keep the sides of the slot apart. The slot opening top assembly is manufactured from 14 gauge steel and finished with an acid resistant powder epoxy coating. Specify -3 for a fabricated Type 304 stainless steel slot opening top assembly. Specify -HD for a fabricated heavy duty steel slot opening top assembly for dynamic loads. End and bottom outlets are available in 4" and 6" no hub outlet connections. Catch basins are also available.

**Function:** Used in parking lots, factories, highways, airports, ports, wineries and any other facilities that require surface drainage with a narrow drainage opening for aesthetic appeal. The lightweight and chemical resistant polypropylene body provides for long life. Water resistant sealant recommended between sections for indoor installations. An infinite number of body sections can be assembled together to serve any requirement. 45 and 90 degree body sections are available.

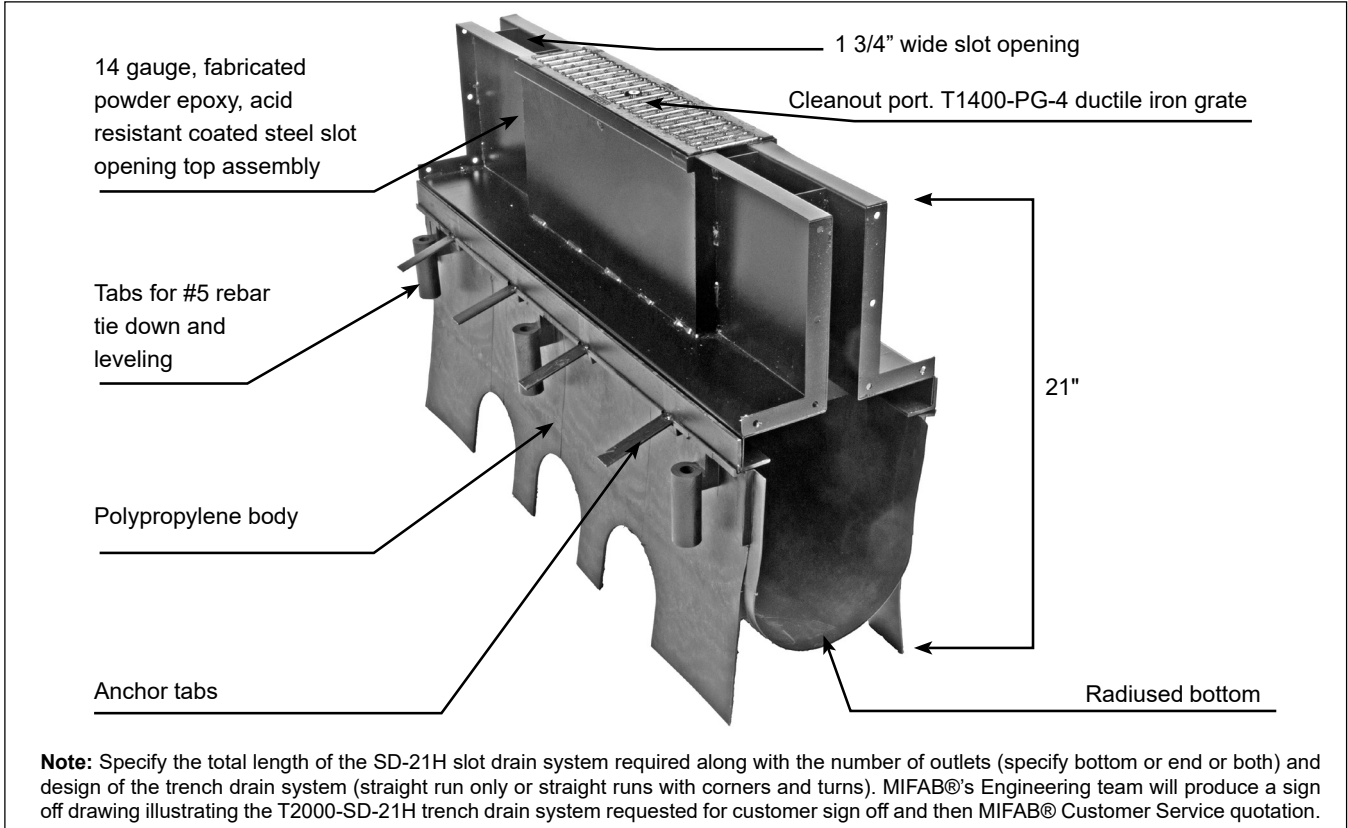

**Note:** Specify the total length of the SD-21H slot drain system required along with the number of outlets (specify bottom or end or both) and design of the trench drain system (straight run only or straight runs with corners and turns). MIFAB®'s Engineering team will produce a sign off drawing illustrating the T2000-SD-21H trench drain system requested for customer sign off and then MIFAB® Customer Service quotation.

**End caps / Outlets / Accessories**

Suffix	Description
-BA	Buy American Act compliant product
-PA	Pennsylvania Steel Act compliant product
-PEC	Closed end cap
-PEO	Combination 4" or 6" no hub end outlet
-PBO	Combination 4" or 6" no hub bottom outlet
-7MG	MI-GARD trap seal protection device (available for 1-1/2", 2", 3", 3-1/2", 4" and 6" outlet connections)

**Frame Options**

Suffix	Description
-3	Type 304 Stainless Steel Frame with 1 3/4" wide slot
-13	Galvanized Steel Frame with 1 3/4" wide slot
-HD	Heavy duty steel 1 3/4" wide slot opening top assembly for dynamic loads.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_